

## Dielectric Ceramic Filter Specification

*After viewing or printing spec, use your browser back button to return to Over Stock Page*

### SPECIFICATIONS

1	Center Frequency (fo)	a1	1880 MHz
2	0.5 dB Pass Band Width	b1	Fo +/- 31 MHz
3	Insertion Loss in fo	c1	2.3 dB max
4	Ripple in PB	d1	0.7 dB max
5	Attenuation	Fo – 80MHz	e1 20 dB min
		Fo + 80MHz	f1 20 dB min
			g1 dB min
			h1 dB min
6	Return Loss in PB	i1	14 dB min
7	Impedance		50Ω
8	Maximum Input Power		1 W (+30dBm)
9	Group Delay Time in PB		Ns max
10	Operating Temperature Range		-20 - +70 degree(°C)


### ***Filtronetics, Inc***

6010 Parretta Dr.  
 Kansas City, MO 64120  
 P: 819-231-7375  
 F: 816-241-0368  
 Email: [info@filtro.net](mailto:info@filtro.net)  
[www.filtro.net](http://www.filtro.net)

**Part Number: CF-3**  
**Dielectric Ceramic Filter Specification**

## DIMENSIONS

UNIT : mm

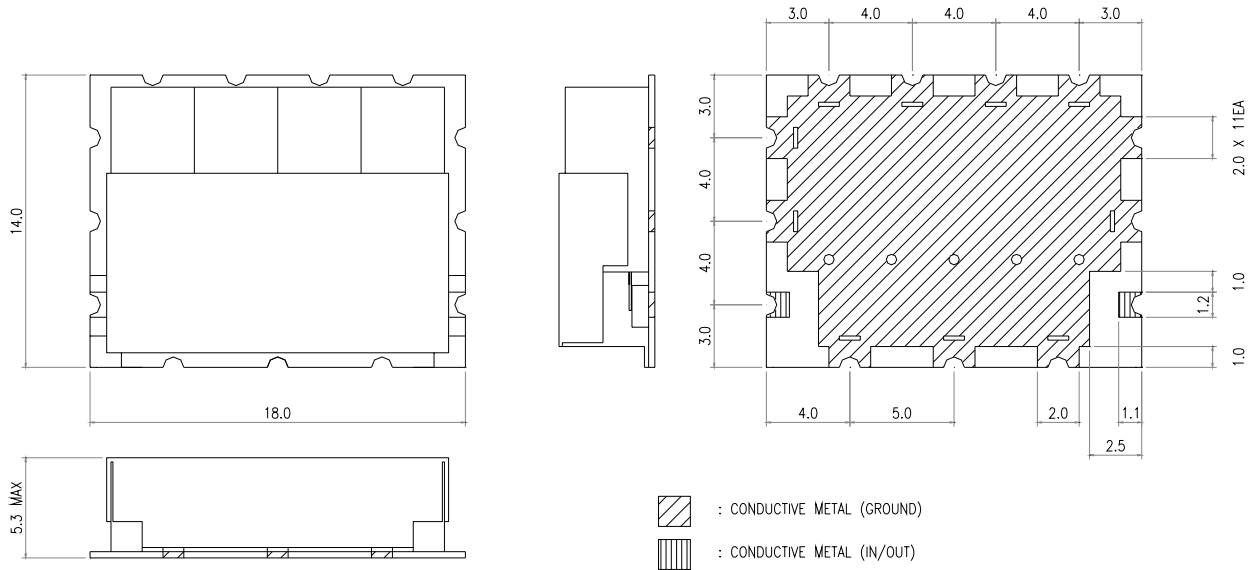

### 1. PCB

- 1) MATERIAL : FR-4
- 2) TERMINALS : Gold PLATED

### 2. CASE

- 1) MATERIAL : Sn/Pb OR Ni PLATED

### 3. RESONATOR

- 1) COATING MATERIAL : Ag

## **Filtronetics, Inc**

6010 Parretta Dr.  
Kansas City, MO 64120  
P: 819-231-7375  
F: 816-241-0368  
Email: [info@filtro.net](mailto:info@filtro.net)  
[www.filtro.net](http://www.filtro.net)

**Part Number: CF- 3**  
**Dielectric Ceramic Filter Specification**

## RELIABILITY TEST AND CONDITIONS

ITEM	TEST CONDITIONS	REQUIREMENTS
Operating Temp. Range		- 20°C ~ + 75°C
Resistance to solder heat	Preheat temperature : 120 to 150°C Preheat time : 1 to 1.5 min Solder temperature : 260 +/- 10°C Dipping time : 10 +/- 0.5 sec	No damage such as cracks should Be caused in chip element.
Solderability	Preheat temperature : 120 to 150°C Preheat time : 1 to 1.5 min Solder temperature : 235 +/- 5°C Dipping time : 5 +/- 1 sec	More than 80% of the terminal electrode shall be covered with new solder
Heat resistance (High-temperature load)	Temperature : 75 +/- 2°C Applied voltage : Rated voltage Applied current : Rated current Recovery : 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Thermal shock (Temperature cycle)	Conditions for 1 cycle / Step 1 : + 75°C 15 min Step 2 : - 20°C 15 min Number of cycle : 10	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Humidity resistance	Temperature : 40 +/- 2°C Humidity : 90 to 95% RH Duration : 96 +/- 5 hrs Recovery : 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Vibration	Frequency : 10 ~ 50 Hz Amplitude : 1.52mm ( 0.060 inches) Direction and time : X, Y and Z Directions for 30 min each.	No mechanical damage. After test, the device shall satisfy the specification in section 3.

**Filtronetics, Inc**  
6010 Parretta Dr.  
Kansas City, MO 64120  
P: 819-231-7375  
F: 816-241-0368  
Email: [info@filtro.net](mailto:info@filtro.net)  
[www.filtro.net](http://www.filtro.net)

**Part Number: CF- 3**  
**Dielectric Ceramic Filter Specification**