

# SPECIFICATION

COMMERCIALY AVAILABLE

ITEM: DIELECTRIC CERAMIC FILTER  
PART NUMBER:CF-03370106

Prepared By:DS

Revised By:

ISSUED	CHECKED	CHECKED	CHECKED	APPROVED

**FILTRONETICS Inc**

1. APPLICATION

THIS SPECIFICATION APPLIES TO BAND PASS FILTER USING DIELECTRIC RESONATORS.


2. PART NUMBER

PART NO	CF-03370106
PACKAGING	PLASTIC TRAY


3. SPECIFICATIONS

NO	ITEMS	Ref.	SPECIFICATION
1	Center Frequency (Fo)	-	337.92 MHz
2	Pass Band Width (=PB)	-	Fo +/-4Mhz
3	Insertion Loss IN PB	-	5.0 dB Max
4	Ripple IN PB	-	1.0 dB Max
5	1dB Band Width		10MHz Min
6	50dB Band Width		35MHz Max
7	Return Loss IN PB	-	13 dB Min
8	Impedance	-	50Ω
9	Maximum Input Power	-	1 W (+30dBm)
10	Operating Temperature Range	-	-40 ~ +85 degree(°C)


S21 LOG MAG NETWORK ANALYZER

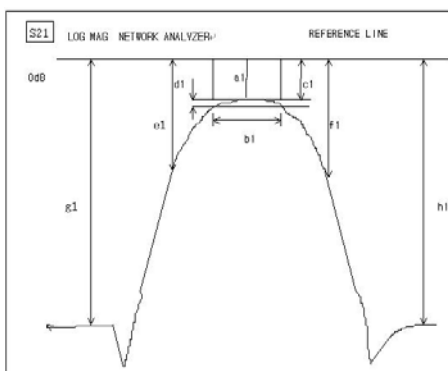

S11 LOG MAG NETWORK ANALYZER

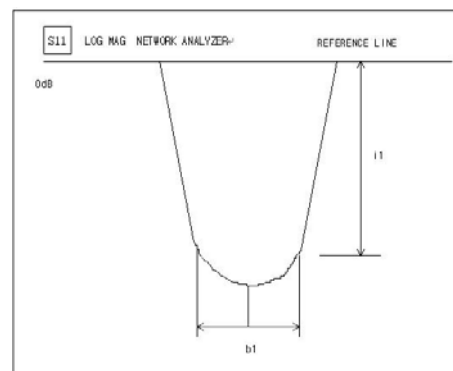

4. DIMENSIONS

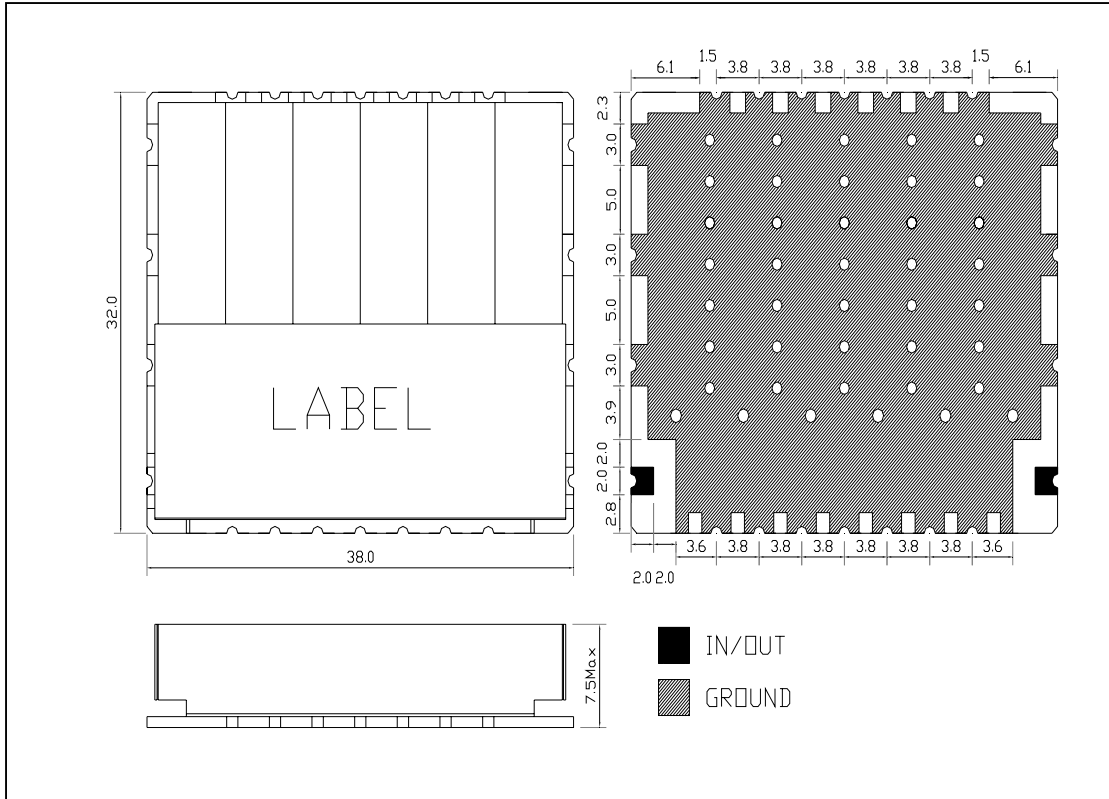



<p><b>MATERIAL SPECIFICATION</b></p> <ol style="list-style-type: none"> <li>1. PCB             <ol style="list-style-type: none"> <li>1) MATERIAL: FR4</li> <li>2) TERMINALS: Au PLATED</li> </ol> </li> <li>2. METAL CASE             <ol style="list-style-type: none"> <li>1) MATERIAL: Sn OR Ni PLATED</li> </ol> </li> <li>3. RESONATOR             <ol style="list-style-type: none"> <li>1) COATING MATERIAL: Ag</li> </ol> </li> <li>4. ROHS Compliant</li> </ol>	<p><b>MARKING</b></p> <p>Part No CF-03370106              Filtronetics, Inc              Date Code</p> <p>UNIT: MM              TOLERANCE: +/-0.5MM              IN/OUT LAND: +/-0.3MM</p>
---	--

● **CAUTIONS:**



1. When handling products, be careful not to damage the outer-electrode.
2. When handling products, be careful not to touch the outer-electrode with bare hands or solderability is reduced.
3. Do not apply excessive pressure or shock to product in handling or in transportation or damage to the ceramic filters may result.

5. GRAPHS

S21 vs. S11 (INSERTION LOSS, RETURN LOSS, V.S.W.R, SMITH CHART)

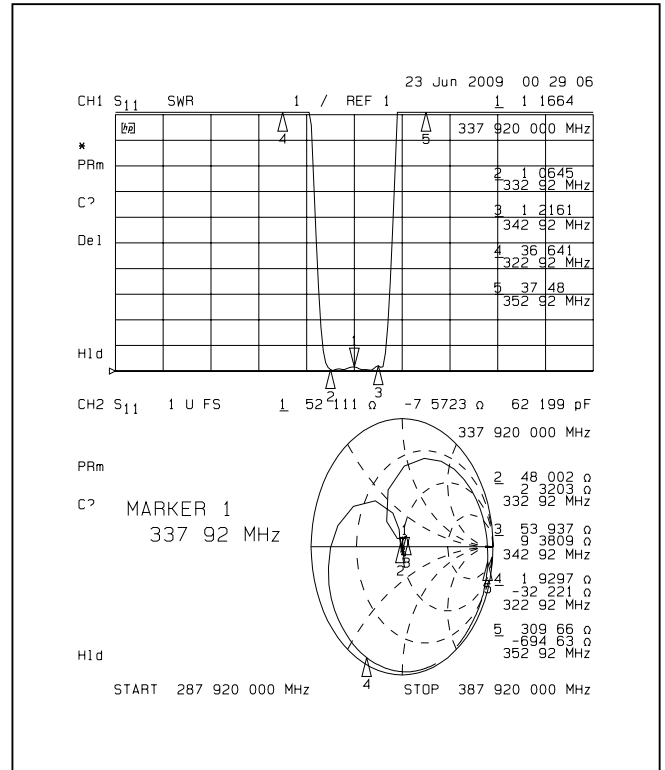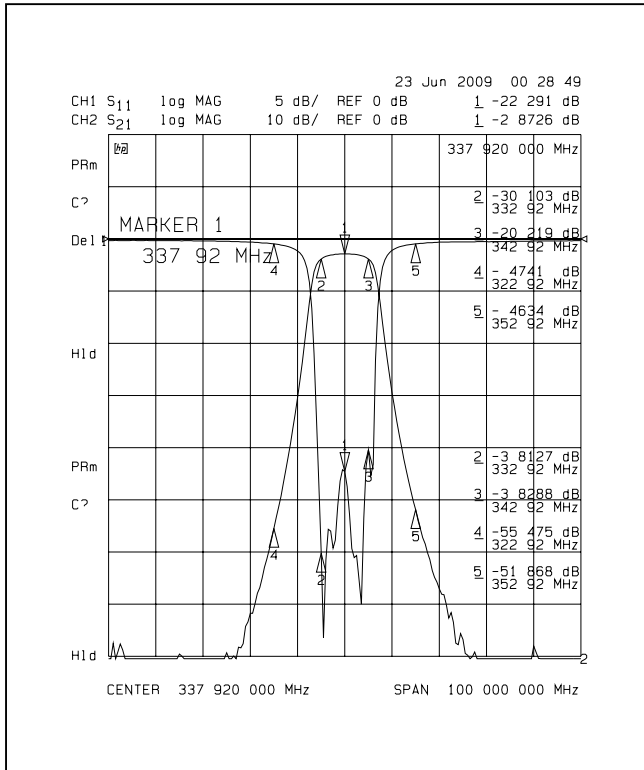


S21 ( 1.0DB BAND WIDTH, 50DB BAND WIDTH)

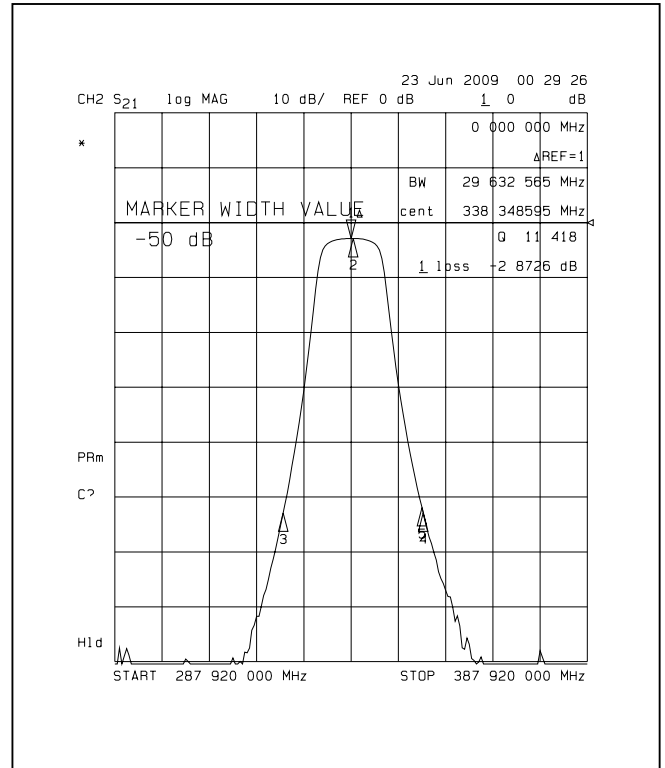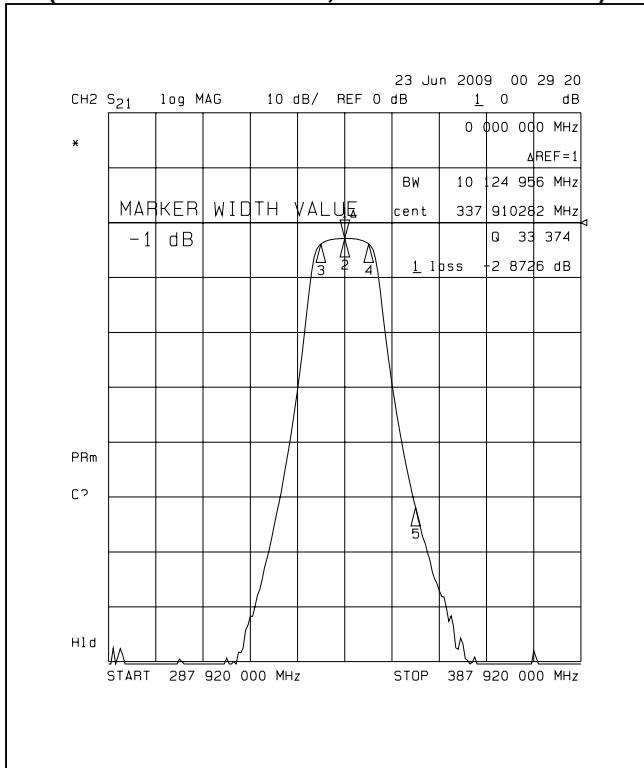

6. DEFINITIONS

TERMS	DESCRIPTION	SPECIFICATION
Center Frequency	The midpoint of through band pass filter pass band, normally expressed as the arithmetic mean of the -3dB point. Also called Fo.	3. SPECIFICATION
Pass Band Width	The width of the pass band of a filter referenced to the minimum insertion loss point in the pass band. The pass band of a filter is stated as -1.0dB bandwidth.	
Insertion Loss	The loss of the filter, in dB, measured at center frequency relative to a through line (0 dB).	
Attenuation	Reduction of RF power through a filter measured in dB, at desired band and referenced to 0 dB. (Filter to be removed from circuit)	
Pass Band Ripple	Variations in loss in the pass band of the filter, superimposed upon the fundamental shape of the pass band.	
V.S.W.R in Pass Band	The ratio of the maximum value of a standing wave to its minimum value, related to the return loss in pass band.	
Date Code	Each date code shall be from a single lot	
Lot	One Batch of parts processed in a single manufacturing run. A single lot shall have no more than one firing, plating, soldering, or other batch processing.	
Cleanliness	Parts shall be clean. They shall be free from smudges, loose solder, solder spatter, metal chips or mold release agents. No burrs. Particles or any foreign material over 0.2 mm which might detract from the intended operation, function or appearance of the part.	

7. REFLOW SOLDERING STANDARD CONDITIONS

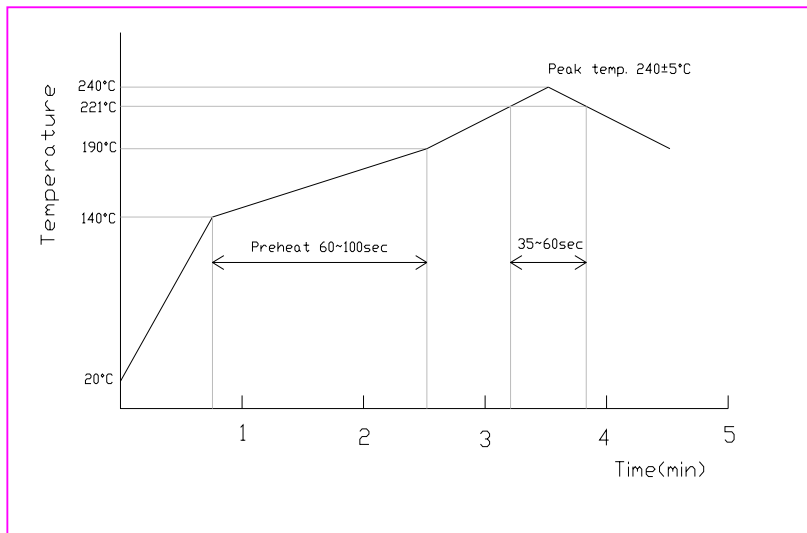

- Measuring point of temperature in-out terminals of the device.
- Reflow Soldering
- Both convection and infrared rays
- Hot air
- Solder Cream: Sn96.5/Ag3.5