

# SPECIFICATION

COMMERCIALLY AVAILABLE

CERAMIC FILTER  
PART NUMBER: CF-07200745  
RoHS Compliant

Available as SMA  
See FNP-1200

ISSUED / REVISION	ENGINEER APPROVED	DOCUMENT CHECKED	DRAFTSMAN
6/14/11 kn	6/17/2011 SRJ	6/20/2011 BF	6/20/2011 GL

***FILTRONETICS Inc***

**1. APPLICATION**



THIS SPECIFICATION APPLIES TO A BAND PASS FILTER, USING DIELECTRIC RESONATORS.

**2. PART NUMBER:**

PART NO	CF-07200745
PACKAGING	PLASTIC TRAY

**3. SPECIFICATIONS:**



NO	ITEMS		Ref.	SPECIFICATION
1	Center Frequency (Fo)		a1	720 MHz
2	Pass Band Width (PB)		-	Fo $\pm$ 37 MHz
3	Insertion Loss AT Fo		-	1.4 dB Max
4	Ripple IN PB			0.5 dB Max
5	Attenuation [Absolute Value]	At 580 MHz	-	50 dB Min
		At 860 MHz	-	45 dB Min
6	Return Loss IN PB		-	15 dB Min, 17 dB Typ
7	Group delay Variation IN PB			9 nSec Max
8	Impedance		-	50 $\Omega$
9	Maximum Input Power		-	1 W Max
10	Operating Temperature Range		-	-40 - +75°C

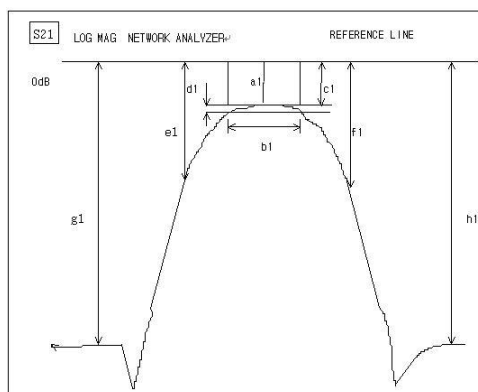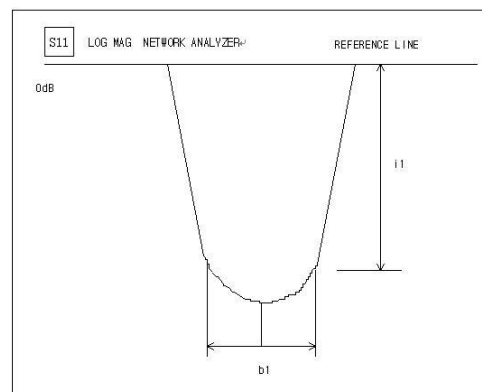**S21 LOG MAG NETWORK ANALYZER****S11 LOG MAG NETWORK ANALYZER**





## 5. GRAPHS:

## S21 &amp; S11 (INSERTION LOSS, RETURN LOSS, V.S.W.R, SMITH CHART)

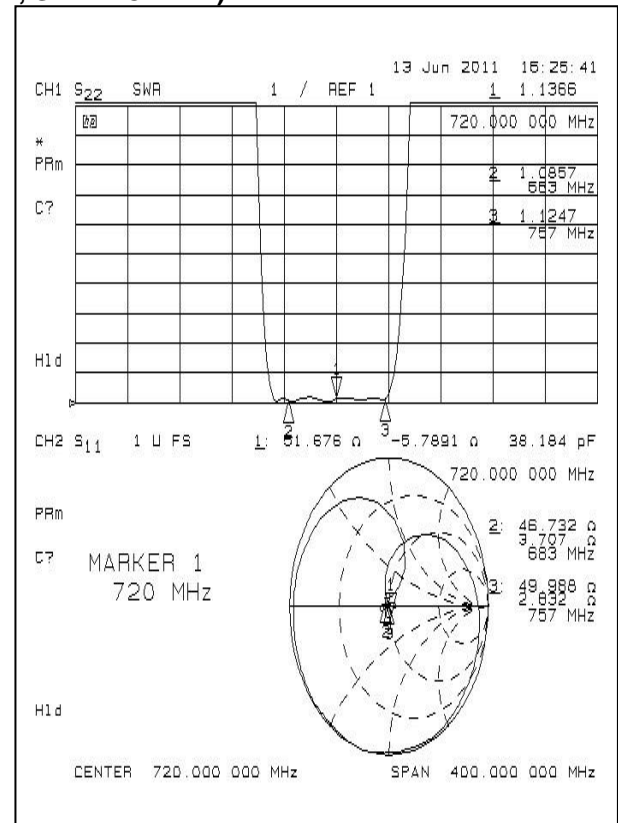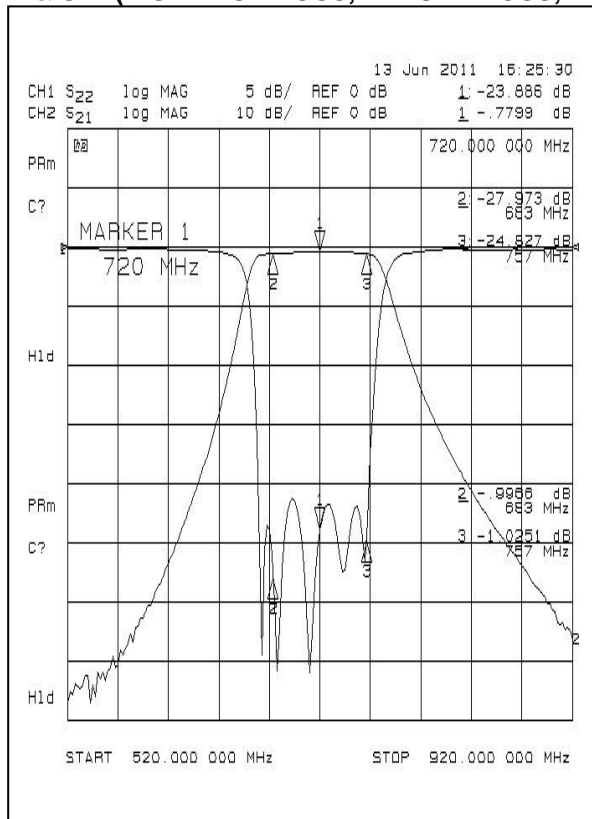

## S21 (GROUP DELAY, ATTENUATION)

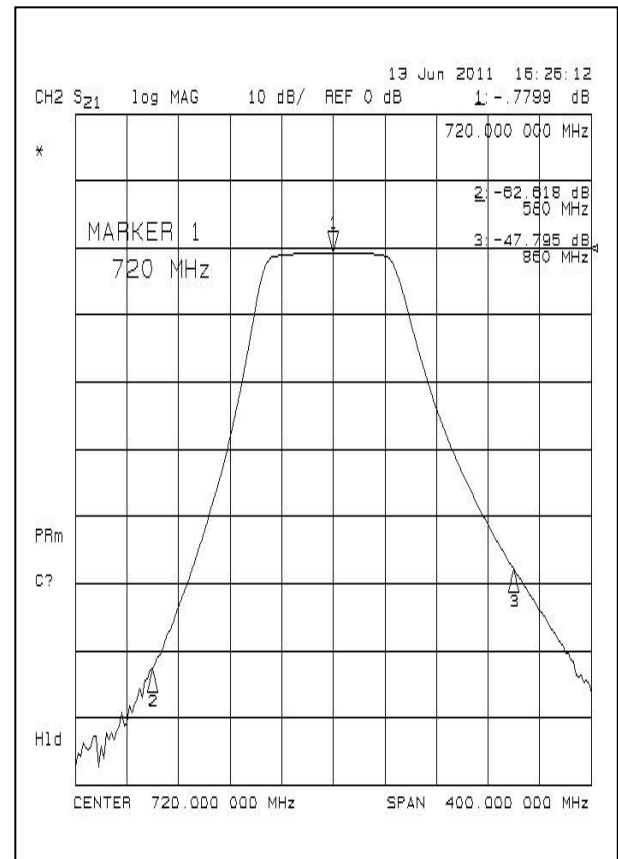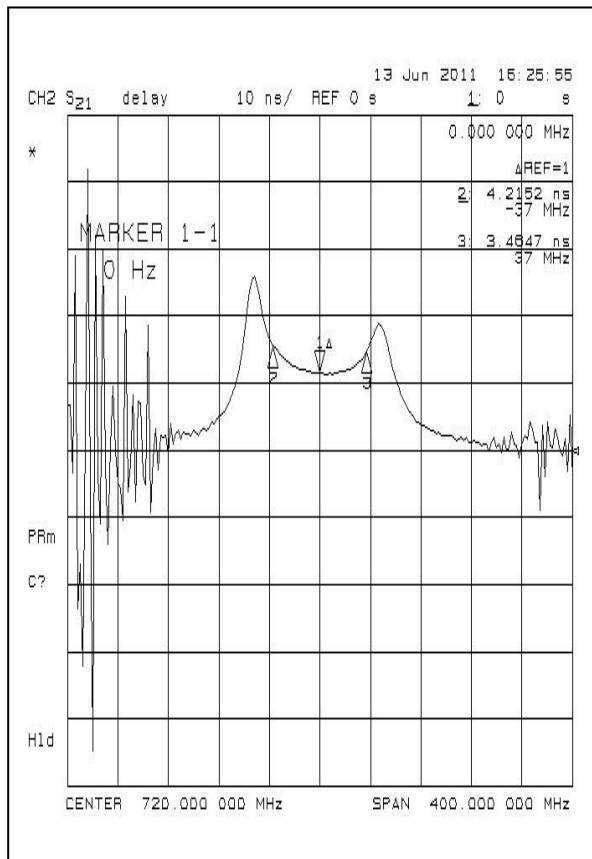


**6. DEFINITIONS:**

TERMS	DESCRIPTION	SPECIFICATION
Center Frequency	The midpoint of through band pass filter pass band, normally expressed as the arithmetic mean of the -3dB point. Also called Fo.	3. SPECIFICATION
Pass Band Width	The width of the pass band of a filter referenced to the minimum insertion loss point in the pass band. The pass band of a filter is stated as -1.0dB bandwidth.	
Insertion Loss	The loss of the filter, in db, measured at center frequency relative to a through line (0 dB).	
Attenuation	Reduction of RF power through a filter measured in dB, at desired band and referenced to 0 dB. (Filter to be removed from circuit)	
Pass Band Ripple	Variations in loss in the pass band of the filter, superimposed upon the fundamental shape of the pass band.	
V.S.W.R in Pass Band	The ratio of the maximum value of a standing wave to its minimum value, related to the return loss in pass band.	

**7. RELIABILITY TEST AND CONDITIONS:**

ITEM	TEST CONDITIONS	REQUIREMENTS
Resistance to solder heat	Preheat temperature : 120 to 150°C Preheat time: 1 to 1.5 min Solder temperature: 260 +/- 10°C Dipping time: 10 +/- 0.5 sec	No damage such as cracks should be caused in chip element.
Solderability	Preheat temperature: 120 to 150°C Preheat time: 1 to 1.5 min Solder temperature: 235 +/- 5°C Dipping time: 5 +/- 1 sec	More than 80% of the terminal electrode shall be covered with new solder
Heat resistance (High-temperature Load)	Temperature: 85 +/- 2°C Applied voltage: Rated voltage Applied current: Rated current Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Thermal shock (Temperature cycle)	Conditions for 1 cycle Step 1: + 85°C 15 min Step 2 : - 30°C 15 min Number of cycle: 10	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Humidity Resistance	Temperature: 40 +/- 2°C Humidity: 90 to 95% RH Duration: 96 +/- 5 hrs Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Vibration	Frequency: 10 ~ 50 Hz Amplitude: 1.52mm ( 0.060 inches) Direction: X, Y and Z Time: each 30 min for all directions	No mechanical damage. After test, the device shall satisfy the specification in section 3.

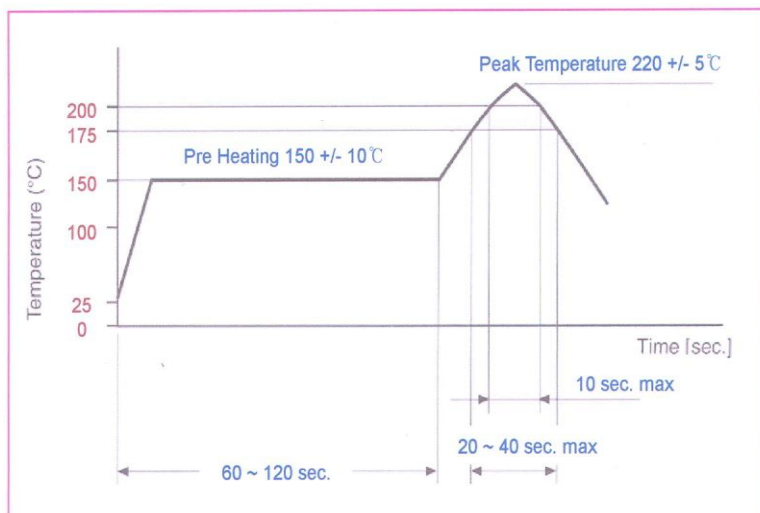**8. REFLOW SOLDERING STANDARD CONDITIONS**

- Measuring point of temperature in-out terminals of the device.
- Reflow Soldering
- Both convection and infrared rays
- Hot air
- Hot plates
- Solder Cream: Sn64/Pb36