


FN-3807W[Package] - [Frequency]

Example: Fo=90 MHz w/ SMA Connectors =
FN-3807WT-90

BANDPASS FILTER

Fo: 70 MHz to 110 MHz
SPECIFY WITH DASH NUMBER

3dB BANDWIDTH: ±25 KHz MIN
40 dB BANDWIDTH: ±100 KHz MAX
INSERTION LOSS: 4.0 dB MAX
IMPEDANCE: 50 OHMS (IN & OUT)
RIPPLE: 1.0 dB MAX
OPERATING TEMPERATURE: 0°C to +70°C
MAX INPUT POWER: TBD (+5 dBm EST)
(SUPPLIED WITH TEST DATA)

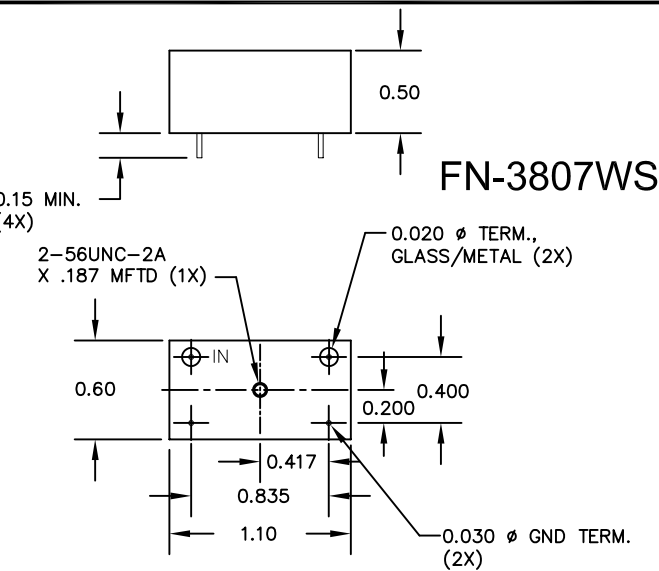

FN-3807W DRAWING SUMMARY

FILTRONETICS, INC.

6010 PARRETTA DR.

KANSAS CITY, MO 64120

816-231-7375 FAX 816-241-0368

WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020


.XXX = ± .010

ANGLE = ± 1°


HOLES = ± .002

REVISED 2/7/2007


FN-3807W

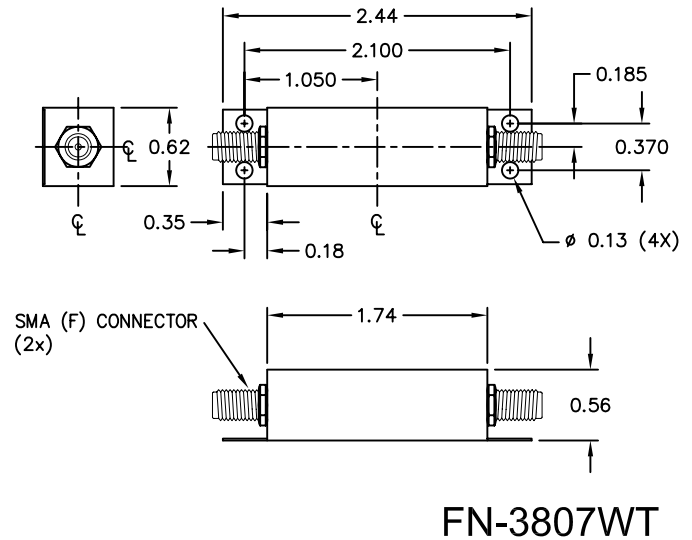

FN-3807WT

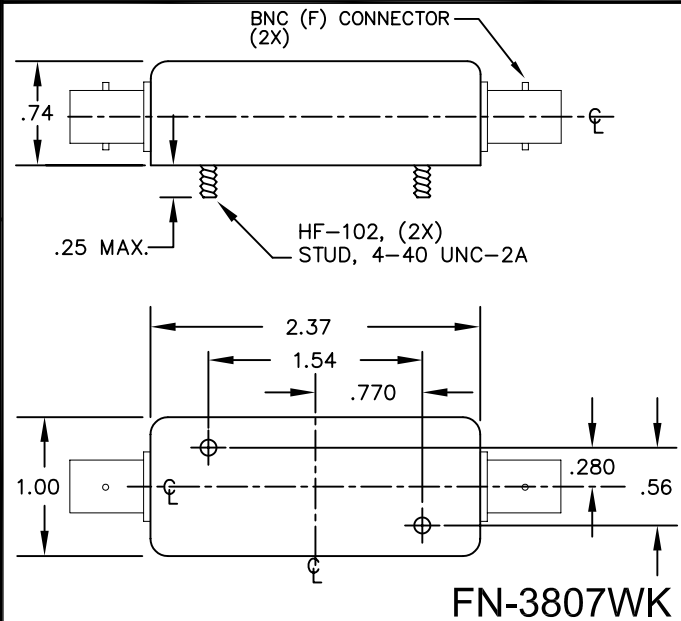

FN-3807WK

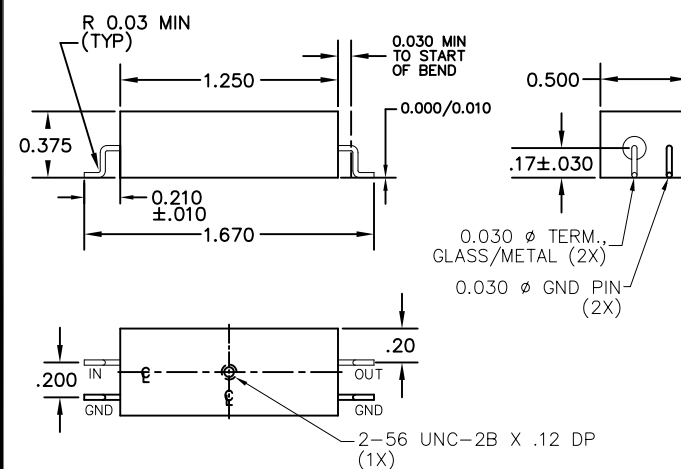

FN-3807WEE