



BANDPASS FILTER

Fo: 70.0 MHz
IMPEDANCE : 50 OHMS (IN & OUT)
INSERTION LOSS: 13.5 dB MAX
RIPPLE: 2.0 dB MAX
3dB BANDWIDTH: ± 550 KHz MIN
50dB BANDWIDTH: 2 MHz MAX
SPURIOUS ATTENUATION: 40 dB MIN
OPERATING TEMPERATURE : 0°C to +50°C

FN-1457W

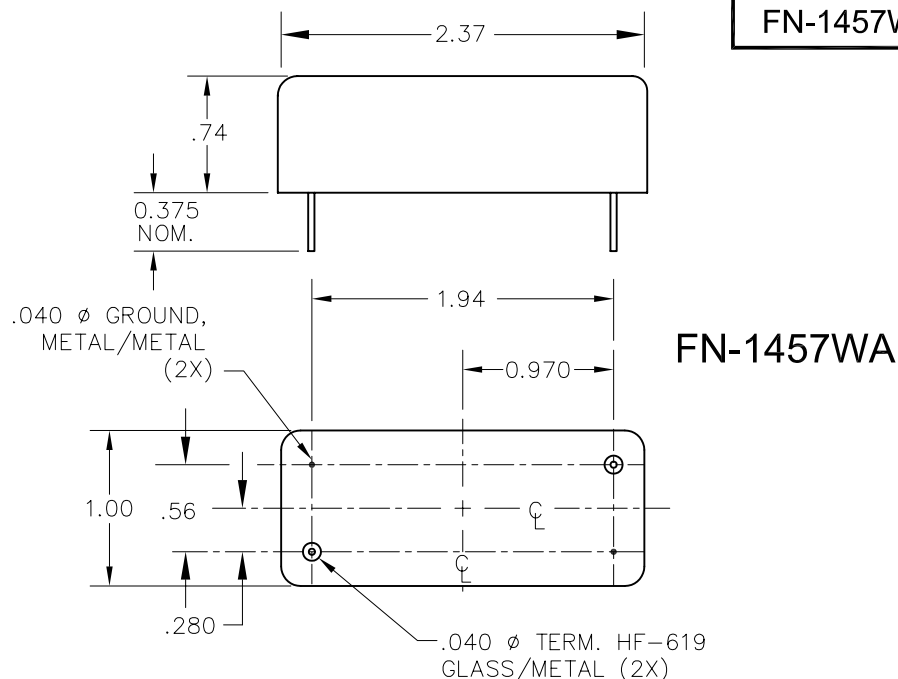

FN-1457WA

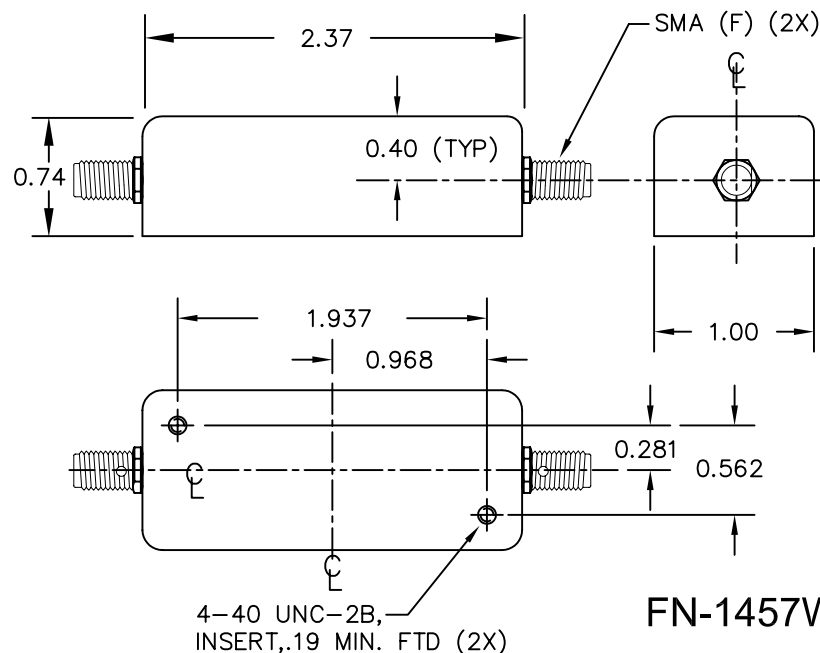

FN-1457WJ

FN-1457W DRAWING SUMMARY SHEET 1 of 2




FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 3/13/2007

FN-1457WJJ

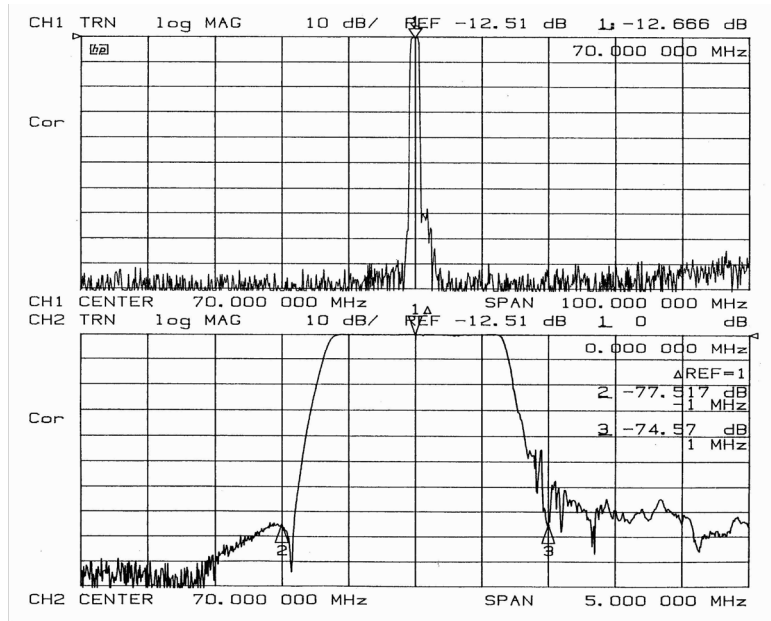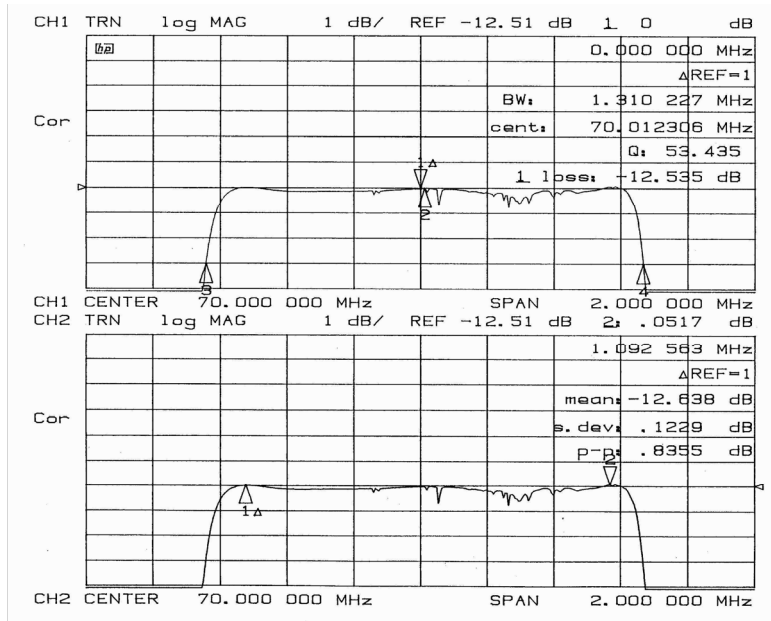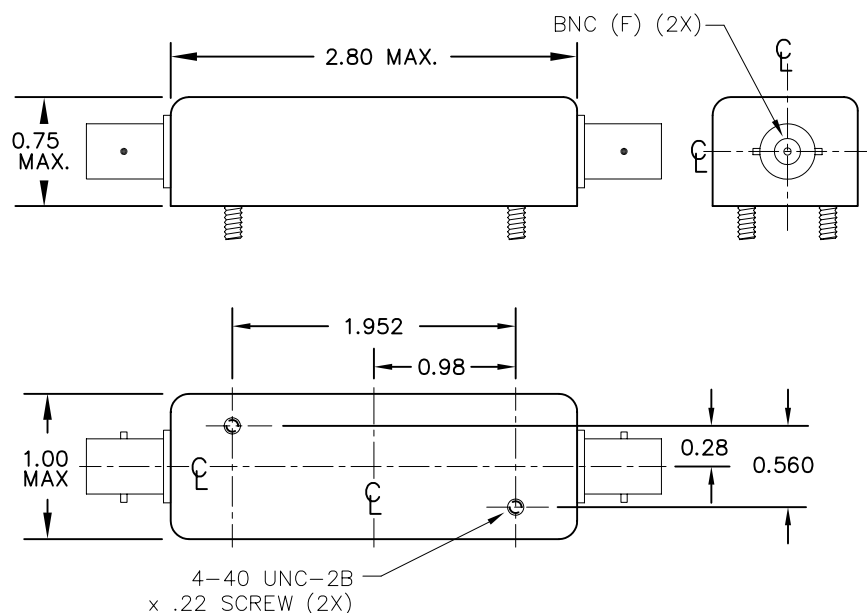

FN-1457W DRAWING SUMMARY SHEET 2 of 2

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES ± .002
.XX = ± .020	
.XXX = ± .010	

REVISED 3/13/2007