



BANDPASS FILTER


Fo: 400.0 MHz
IMPEDANCE : 50 OHMS (IN & OUT)
INSERTION LOSS: 2 dB MAX
RIPPLE: 0.3 dB MAX
2 dB BANDWIDTH: ± 10 MHz MIN
15 dB BANDWIDTH: 70 MHz MAX
ATTENUATION:
 15 dB MIN @ ± 35 MHz
 35 dB MIN @ ± 140 MHz
OPERATING TEMPERATURE : -20°C to +70°C

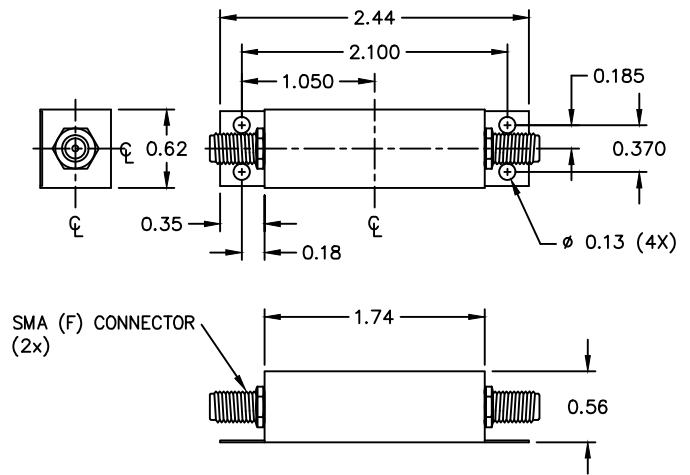

FN-1834WT

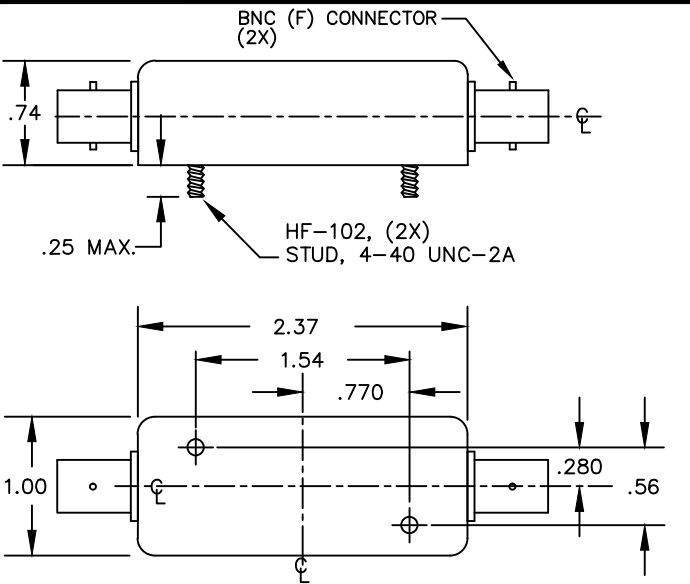

FN-1834WK

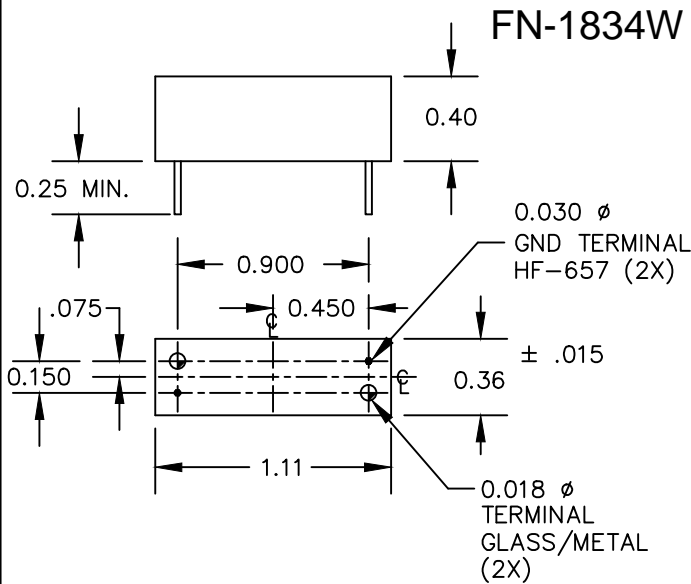

FN-1834W DRAWING SUMMARY


FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
.XXX = ± .010

ANGLE = ± 1°
HOLES = ± .002

REVISED 05/31/12

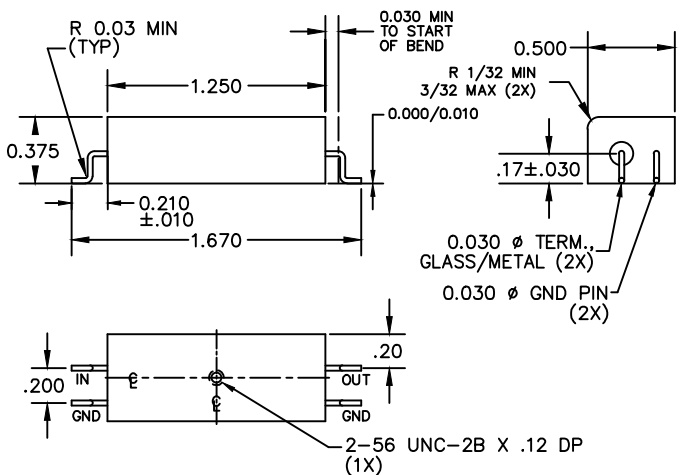

FN-1834WEE