



BANDPASS FILTER

Fo: 45.0 MHz
IMPEDANCE : 50 OHMS (IN & OUT)
INSERTION LOSS: 3.5 dB MAX
RIPPLE: 0.1 dB MAX
.25dB BANDWIDTH: 2 MHz MIN
80dB BANDWIDTH: 18 MHz MAX
ATTENUATION: -80 dB @ 34-36 MHz
 -80 dB @ 54 MHz
OPERATING TEMPERATURE : +15°C to +35°C

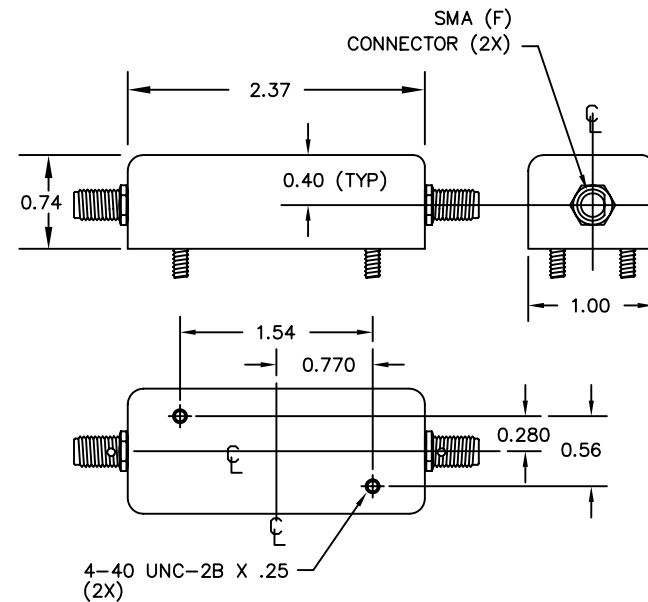

FN-2181WF

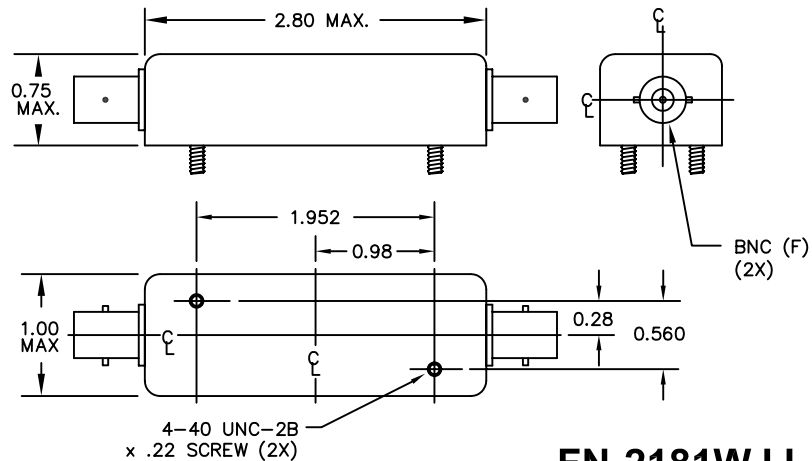

FN-2181WJJ


FN-2181W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 10/3/08

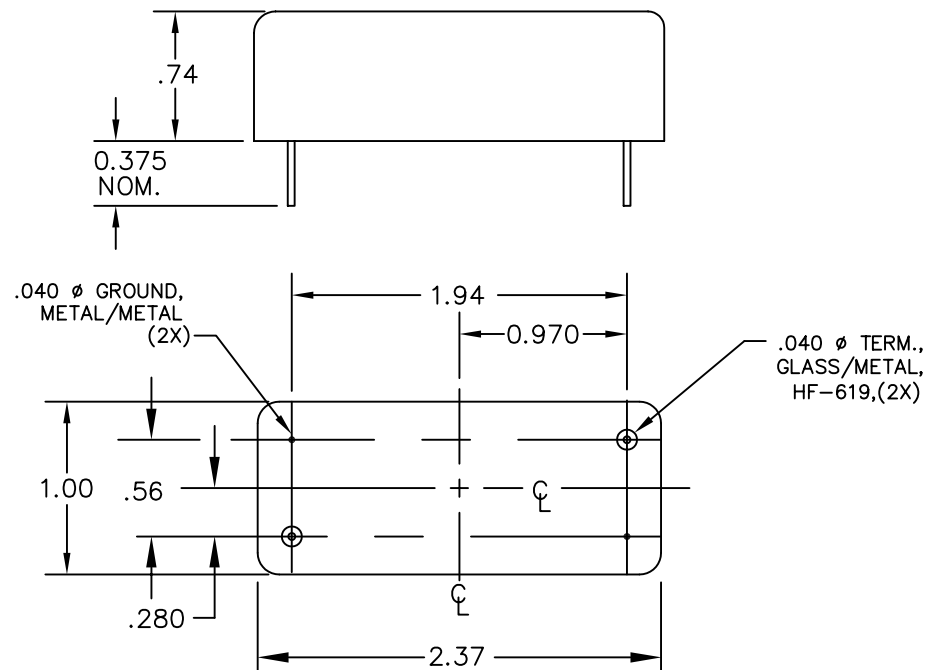

FN-2181WA