


LOW PASS FILTER

0.5 dB CUTOFF: 50 MHz
 IMPEDANCE : 50 OHMS
 RIPPLE: 0.2 dB MAX
 40dB STOPBAND: 132 to 600 MHz
 RETURN LOSS to 50 MHz: 15 dB MIN
 INPUT POWER: +10 dBm MAX
 OPERATING TEMPERATURE : -55°C to +95°C

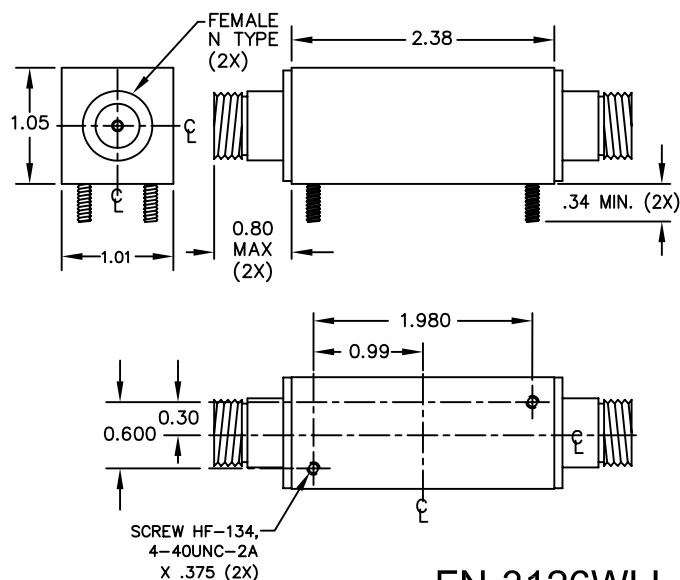

FN-3126WLL

FN-3126W DRAWING SUMMARY

FILTRONETICS, INC.


6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED


.XX = $\pm .020$
 .XXX = $\pm .010$

ANGLE = $\pm 1^\circ$
 HOLES = $\pm .002$

REVISED 03/24/2014

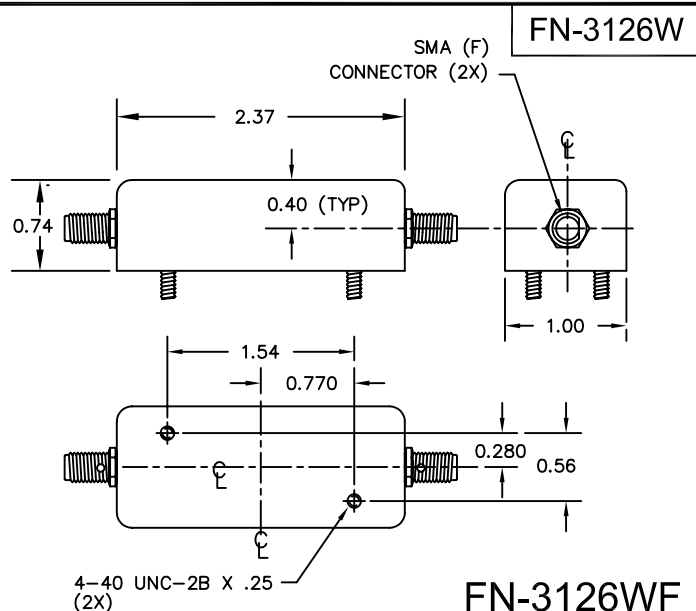

FN-3126WF

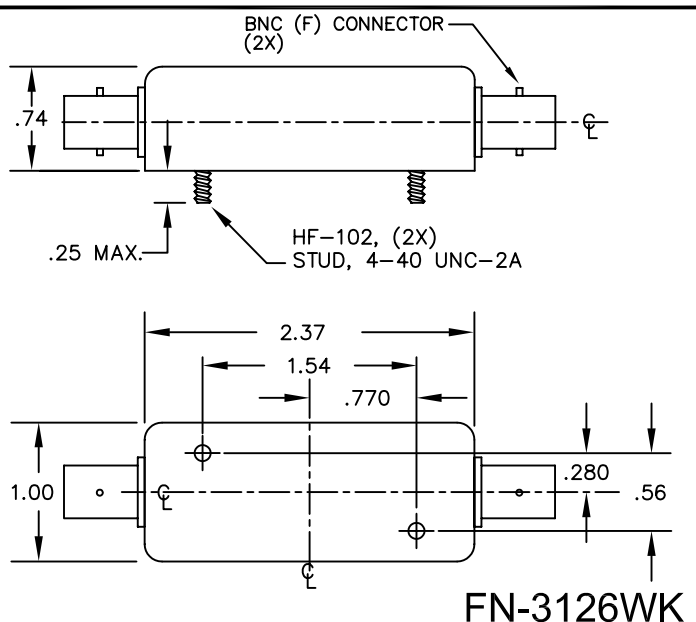

FN-3126WK

