

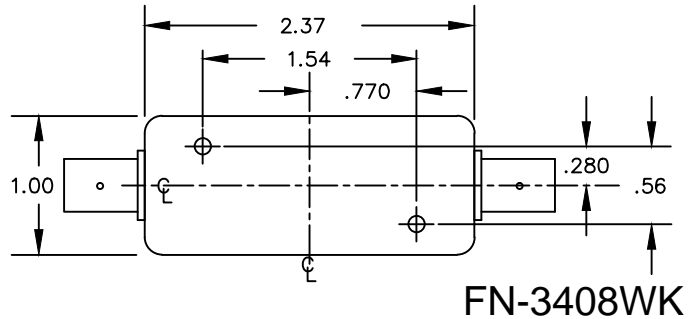
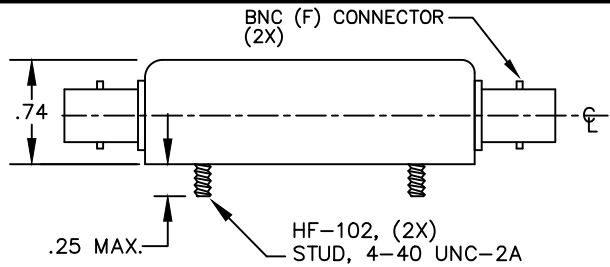
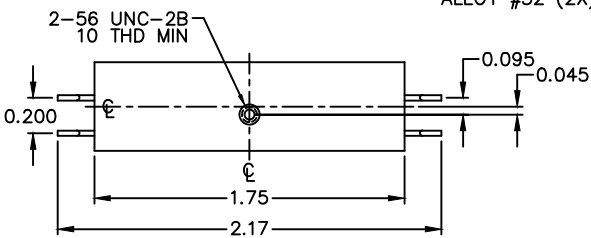


# BANDPASS FILTER

Fo: 25 MHz  
 IMPEDANCE : 50 OHMS (IN & OUT)  
 INSERTION LOSS: 5.5 dB MAX  
 3dB BANDWIDTH: 400 KHz MIN  
 45dB BANDWIDTH: ±500 KHz MAX  
 ULTIMATE ATTENUATION: 60 dB MIN  
 OPERATING TEMPERATURE : -20°C to +70°C  
 OPERATING POWER: +20 dBm MAX

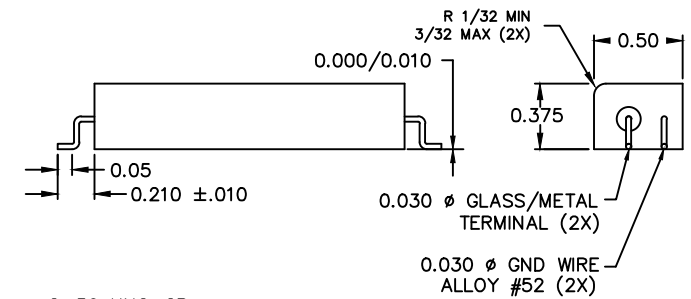

**FN-3408WK**

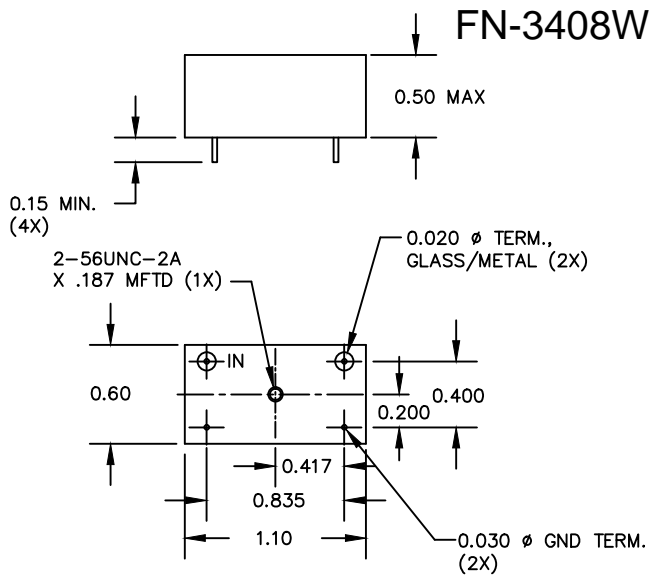

**FN-3408WFF**

## FN-3408W DRAWING SUMMARY


**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020  
.XXX = ± .010

ANGLE = ± 1°  
HOLES = ± .002

REVISED 2/11/2019

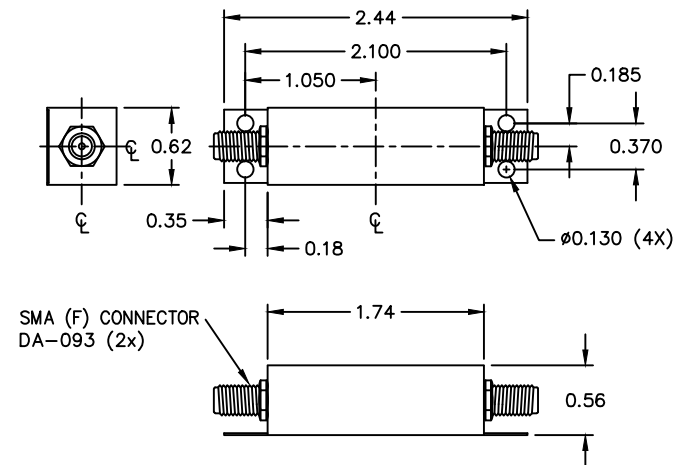

**FN-3408WT**