

BANDPASS FILTER

Fo: 200 MHz
IMPEDANCE: 50 ohms (IN & OUT)
INSERTION LOSS: 4.0 dB MAX
RETURN LOSS @ Fo: 15 dB MIN
3 dB BANDWIDTH: 16 MHz MIN
60 dB BANDWIDTH: 200 MHz MAX
ULTIMATE ATTENUATION: 60 dB MIN
 300 MHz to 3 GHz
ULTIMATE ATTENUATION: 50 dB MIN
 3 GHz to 6 GHz
OPERATING TEMPERATURE: -55° to +85°C



FN-3663W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 4/12/2007

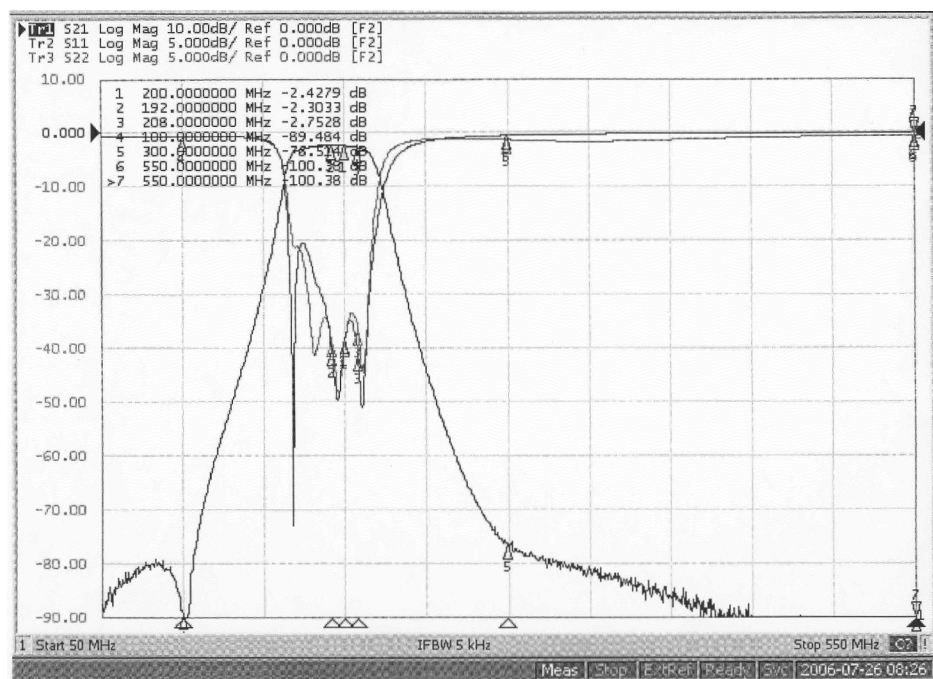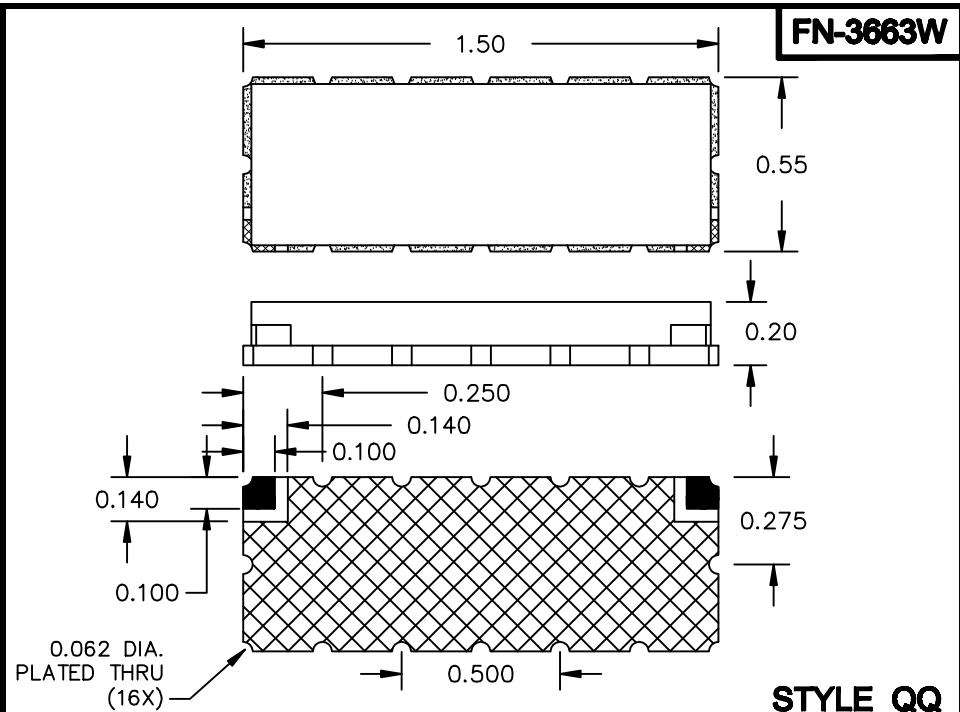

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.