


CRYSTAL BANDPASS FILTER

Fc: 80 KHz $\pm$ 10 Hz
INSERTION LOSS: 3 dB MAX @ 25°C
3 dB BANDWIDTH: 75 Hz MIN $\pm$ 10 Hz
STOP BAND ATTENUATION 60 dB: 320 Hz Max
PASS BAND RIPPLE: 0.1 dB Max
IMPEDANCE: 600 Ohm $\pm$ 5%
OPERATING TEMPERATURE: 0°C TO +65°C
STORAGE TEMPERATURE: -40°C TO +75°C

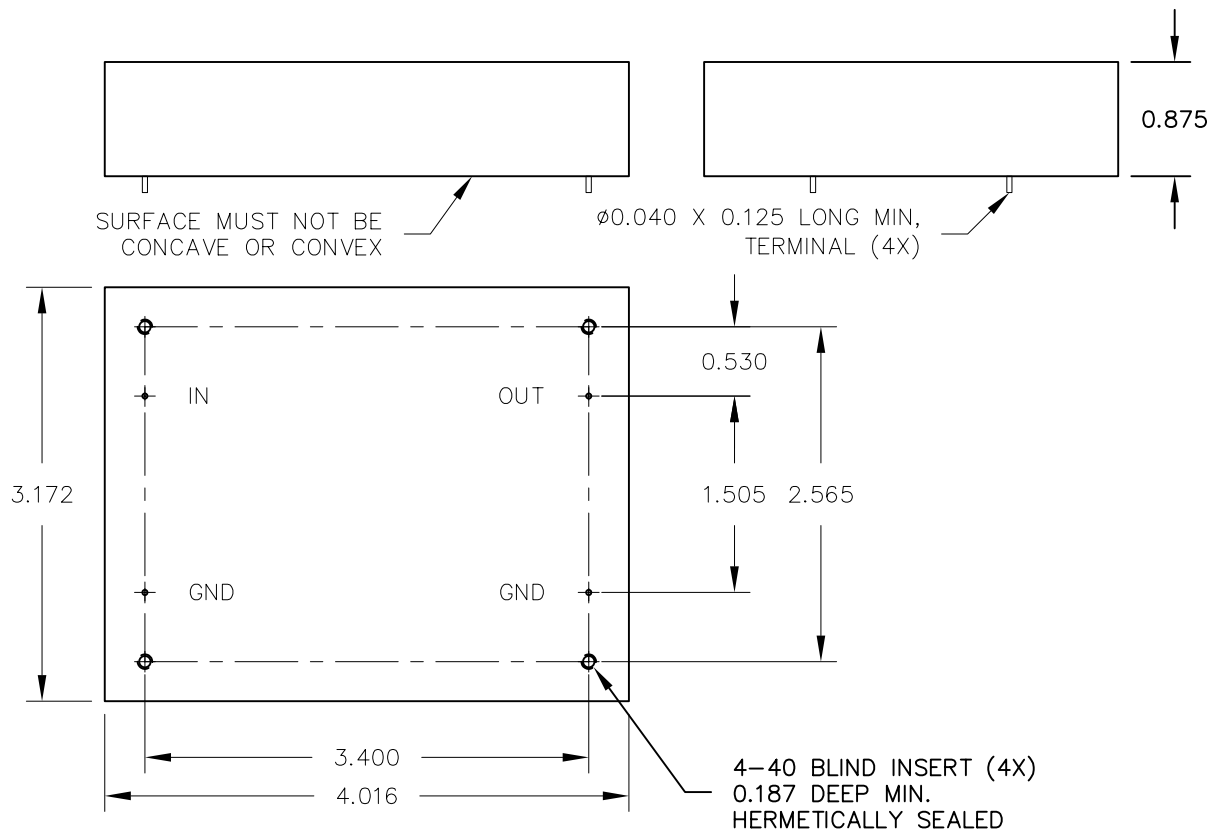

FN-123W DRAWING SUMMARY

FILTRONETICS, INC.

6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = $\pm$.030
.XXX = $\pm$.010

ANGLE = $\pm$ 1°
HOLES = $\pm$.002

ISSUED 06/05/2014

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY.
DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.