


FN-154W

BANDPASS FILTER

Fo: 50 KHz
 IMPEDANCE : 200 ohm IN /OUT
 INSERTION LOSS: 4 dB MAX
 RIPPLE: 0.5 dB MAX
 1dB BANDWIDTH: 7 Hz MIN
 3dB BANDWIDTH: 11 Hz MAX
 60dB BANDWIDTH: 55 Hz MAX
 OPERATING TEMPERATURE : 0°C to +65°C

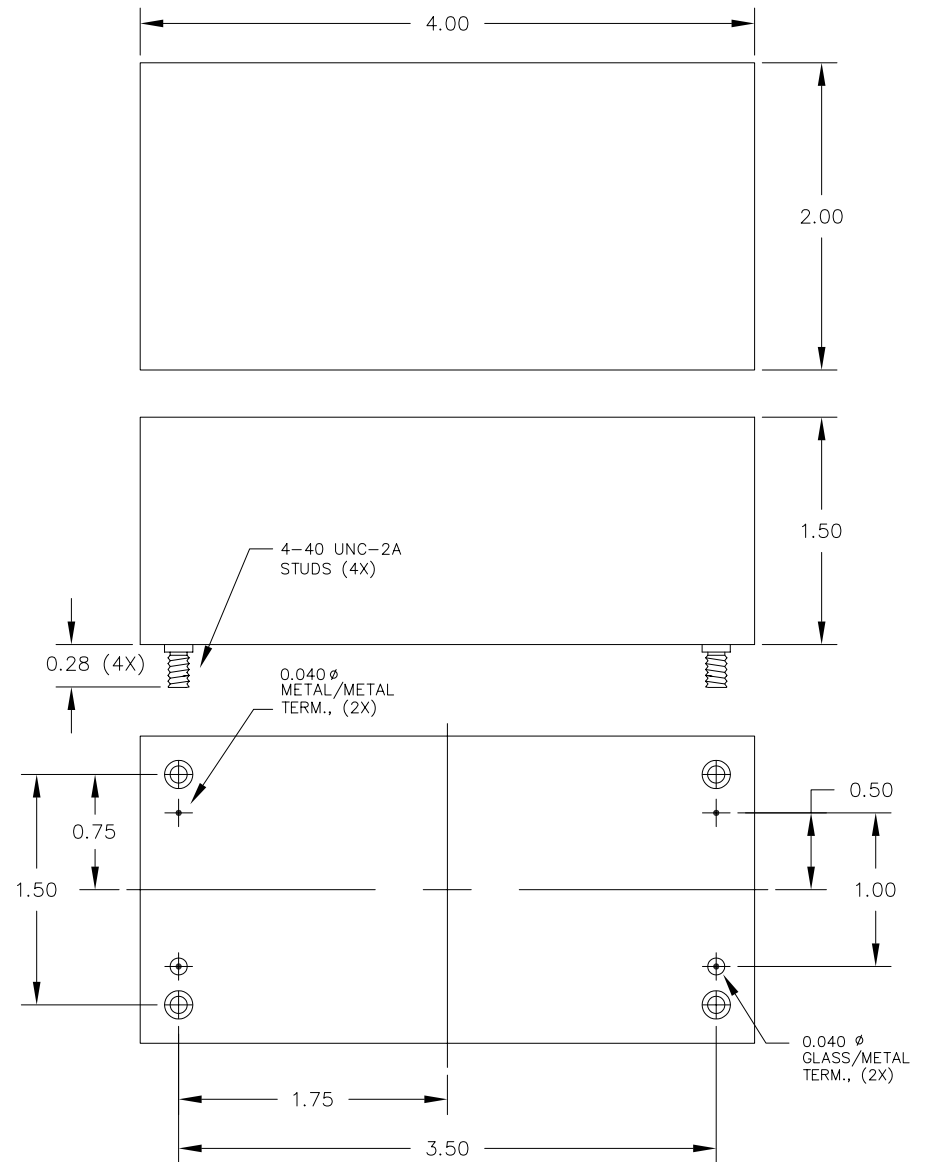

FN-154W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

| | |
|-----------------------|------------|
| ANGLE = $\pm 1^\circ$ | HOLES |
| .XX = $\pm .020$ | $\pm .002$ |
| .XXX = $\pm .010$ | |

REVISED 8/25/03