


BANDPASS FILTER


Fo:	10.7 MHz
IMPEDANCE :	50 OHM (IN/OUT)
INSERTION LOSS:	3.5 dB MAX
RIPPLE:	0.1 dB
3dB BANDWIDTH:	900 Hz NOMINAL
60dB BANDWIDTH:	6.5 KHz MAX
ULTIMATE ATTENUATION:	60 dB MIN
OPERATING TEMPERATURE : -20°C to +70°C	

FN-1835W


FN-1835W

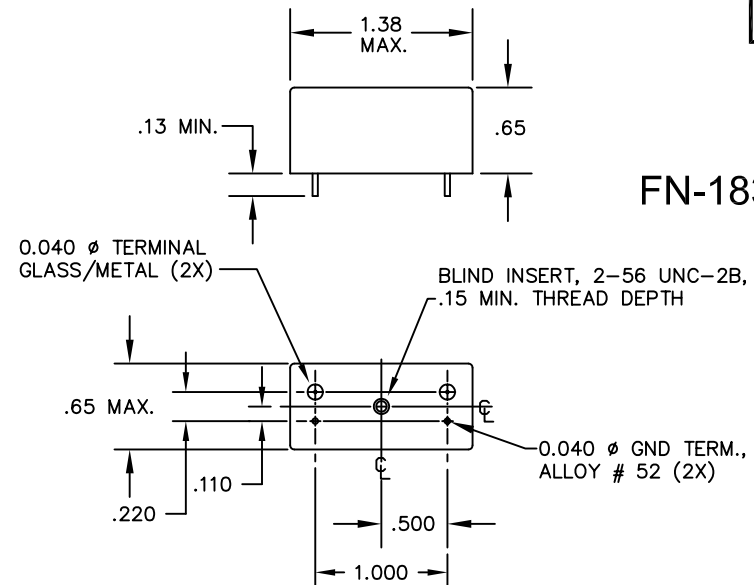

FN-1835WF

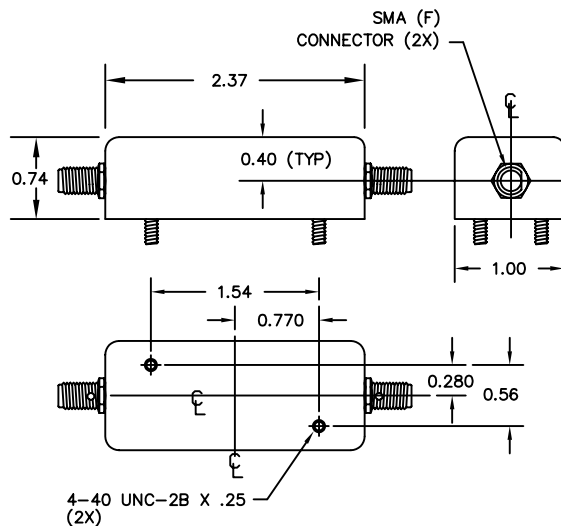

FN-1835WK

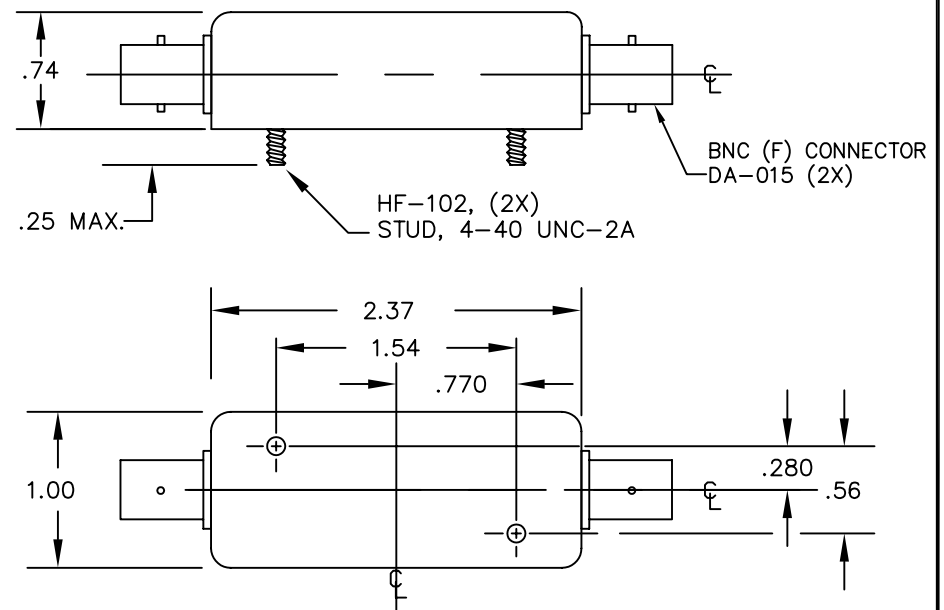

FN-1835W DRAWING SUMMARY

FILTRONETICS, INC.
6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISÉD 1/13/2009

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.