



BANDPASS FILTER

Fo: 467.1 MHz
IMPEDANCE : 50 ohms IN/OUT
INSERTION LOSS: 8.0 dB MAX
RIPPLE: 0.1 dB MAX
3dB BANDWIDTH: 100 KHz MIN
30dB BANDWIDTH: 800 KHz MAX
SPURIOUS ATTENUATION 15 dB MIN
(Fo to +1.5 MHz)
OPERATING TEMPERATURE : +20°C to +30°C


FN-2231W

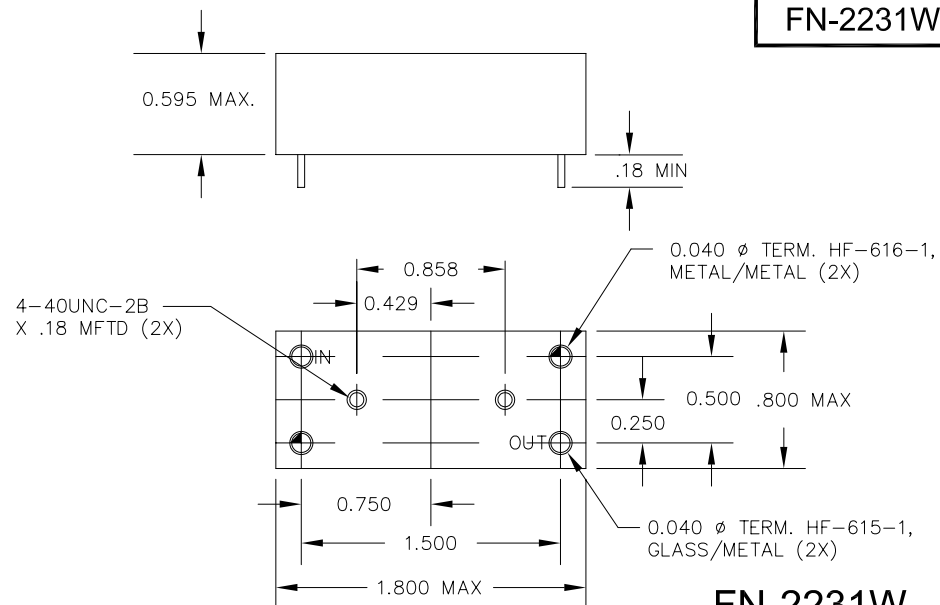

FN-2231W

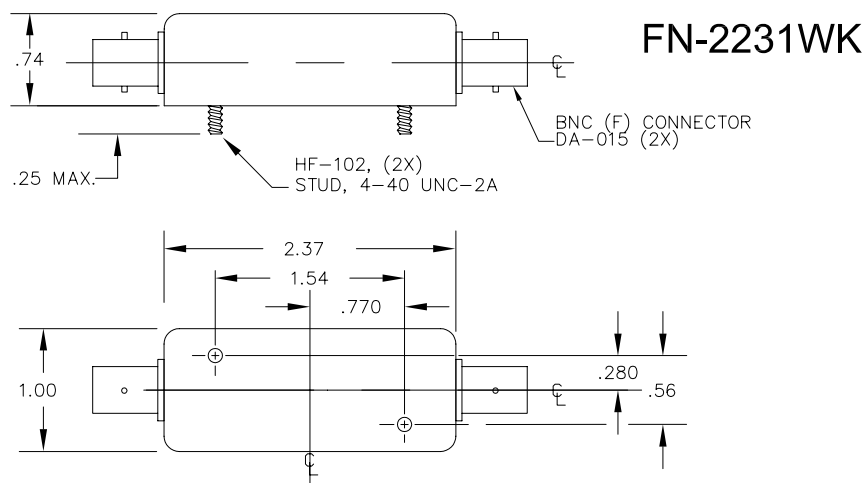

FN-2231WK

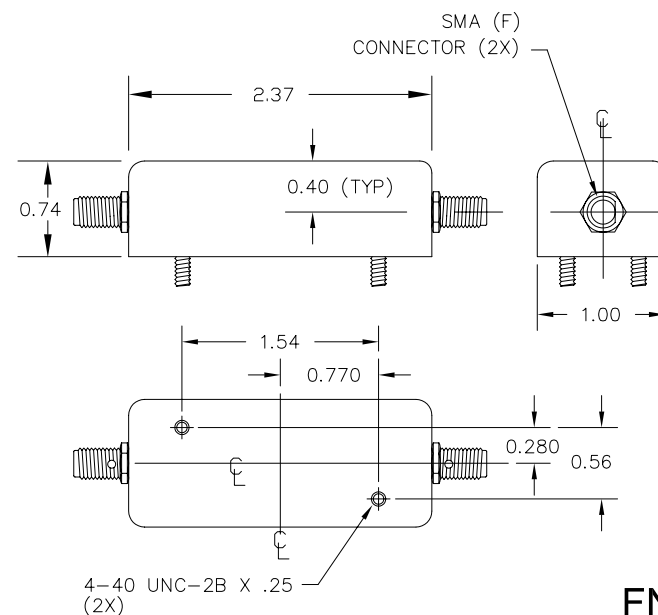

FN-2231WF

FN-2231W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 10/20/03

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.