


BANDPASS FILTER

Fo: 21.4 MHz
 3dB BANDWIDTH: 25 KHz NOMINAL
 60 dB BANDWIDTH: ± 55 KHz MAX
 INSERTION LOSS: 4.0 dB MAX
 IMPEDANCE: 50 OHMS (IN & OUT)
 RIPPLE: 1.5 dB MAX
 SPURIOUS ATTENUATION: 50 dB MIN
 GROUP DELAY VARIATION: ± 38 μ SEC MAX ± 10 KHz
 OPERATING TEMPERATURE: -55°C TO +85°C

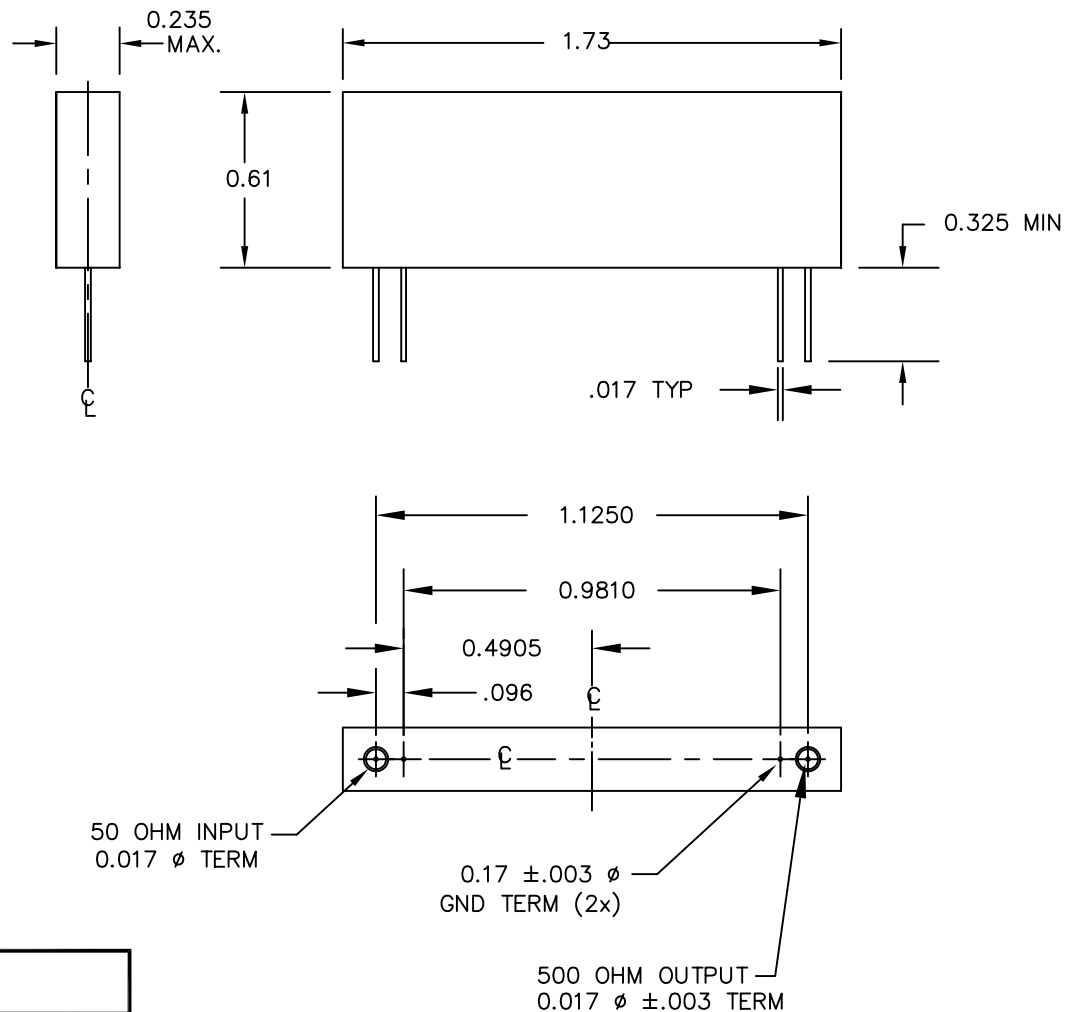

FN-2246W DRAWING SUMMARY

FILTRONETICS, INC.

6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 2/12/08