

LOWPASS FILTER

Fc: 250 KHz

IMPEDANCE : 50 OHMS (IN & OUT)




INSERTION LOSS : 0.5 dB MAX

RIPPLE : 0.5 dB MAX

3 dB CUTOFF : 250 KHz MIN

70dB CUTOFF : 300 KHz MAX

OPERATING TEMPERATURE : 10°C TO +40°C

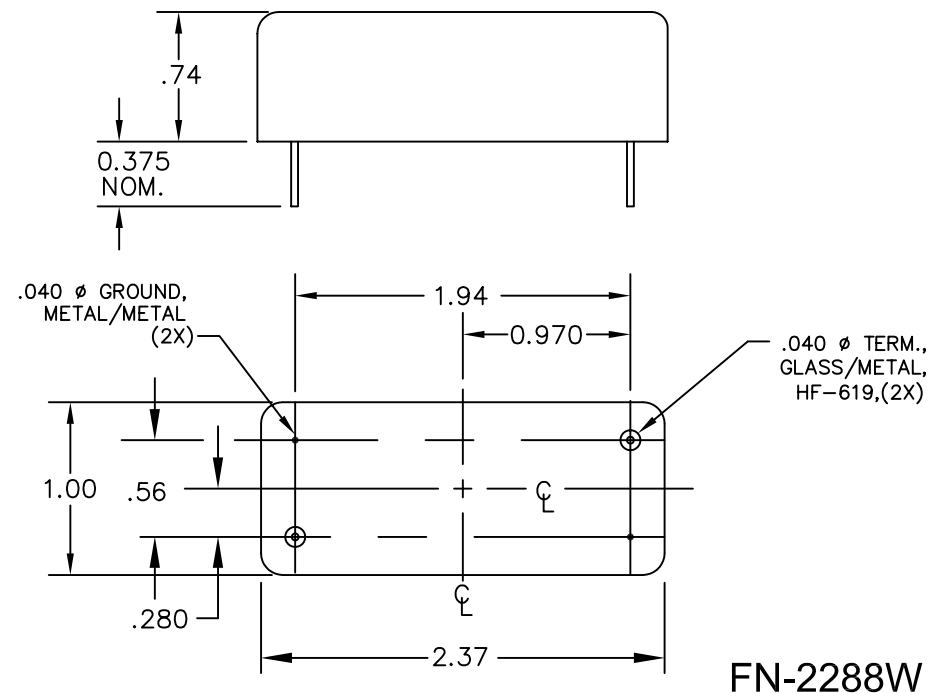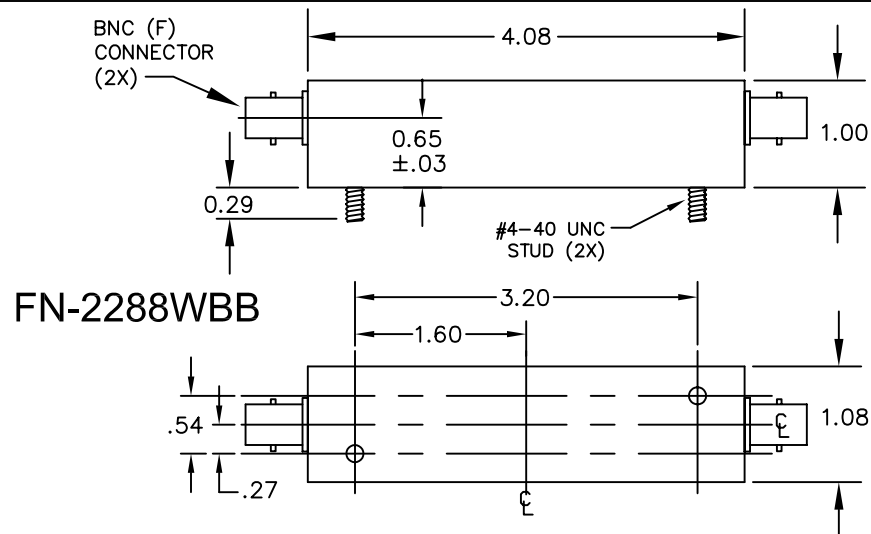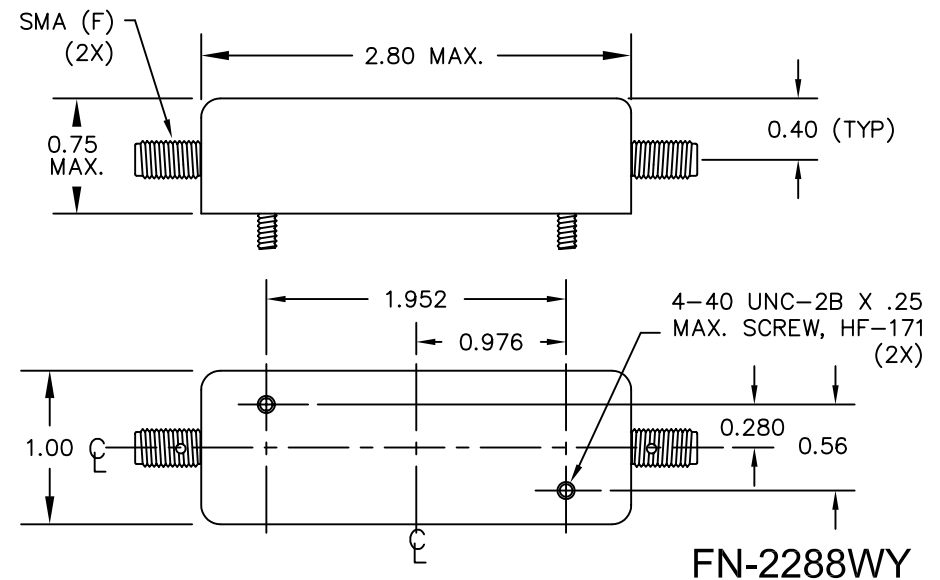

FN-2288W DRAWING SUMMARY

FILTRONETICS, INC.

6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 10/08/2008

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.