




BANDPASS FILTER

Fo: 187.5 MHz
1dB BANDWIDTH: 20 MHz MIN
60 dB BANDWIDTH: 112.5 MHz MAX
INSERTION LOSS: 5.5 dB MAX
IMPEDANCE: 50 OHMS (IN & OUT)
RIPPLE: 0.5 dB MAX
PHASE TRACKING AVAILABLE:
CONSULT FACTORY
ULTIMATE ATTENUATION: 60dB
OPERATING TEMPERATURE: -54°C to +85°C

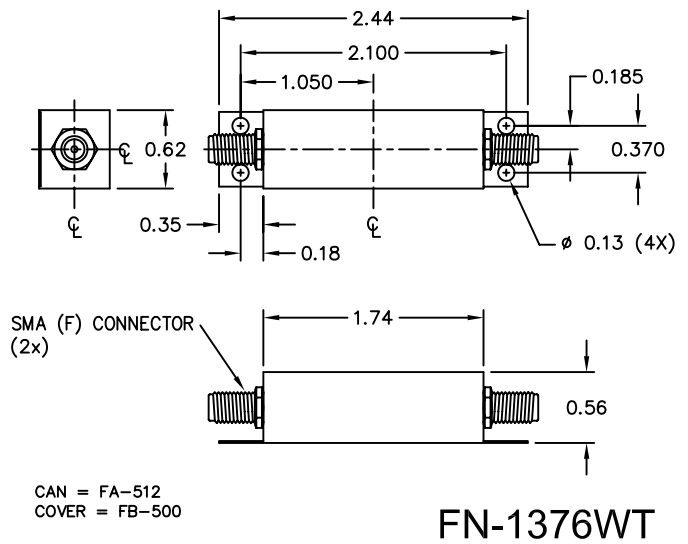

FN-1376WT

FN-1376W

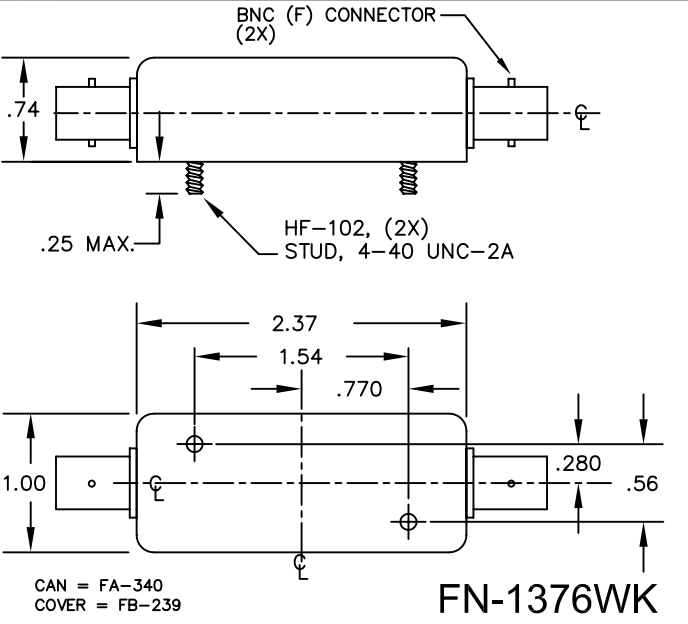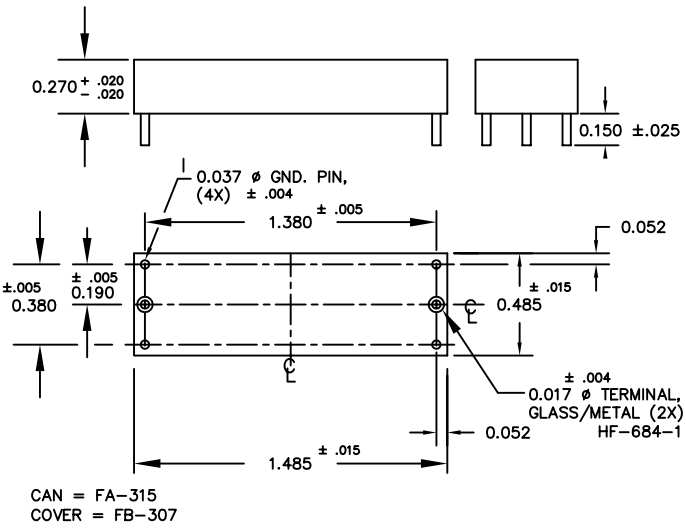

FN-1376WK


FN-1376W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020	ANGLE = ± 1°
.XXX = ± .010	HOLES = ± .002

REVISED 09/26/12 PER ECO 4418

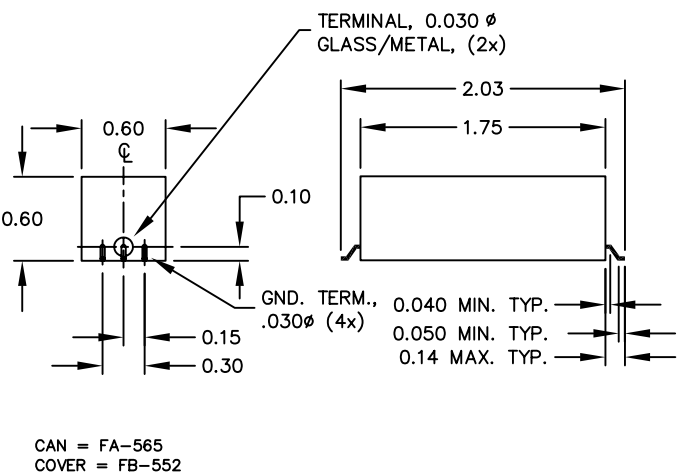

FN-1376WII