



BANDPASS FILTER

Fo: 117.025 MHz
IMPEDANCE : 75 ohms IN/OUT
INSERTION LOSS: 3.0 dB MAX
RIPPLE: 0.1 dB MAX
3dB BANDWIDTH: 6 MHz MIN
60dB BANDWIDTH: 88 MHz MAX
ULTIMATE ATTENUATION TO 750 MHz: 70 dB MIN
PHASE LINEARITY (Fo±500 KHz): .5 DEG MAX
OPERATING TEMPERATURE : 0°C to +70°C


FN-2337W

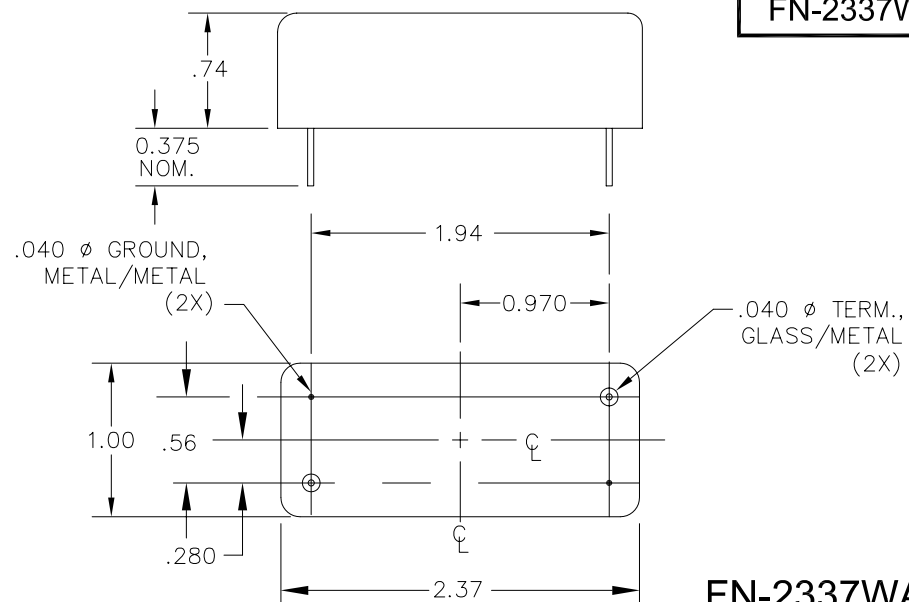

FN-2337WA

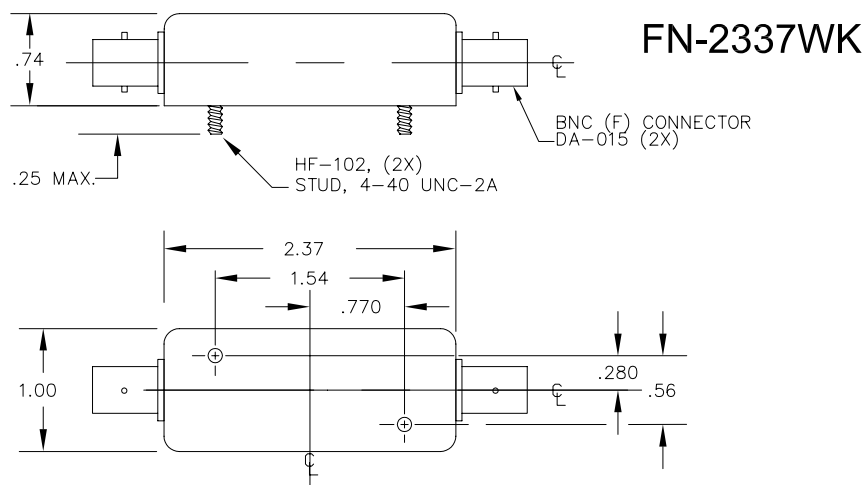

FN-2337WK

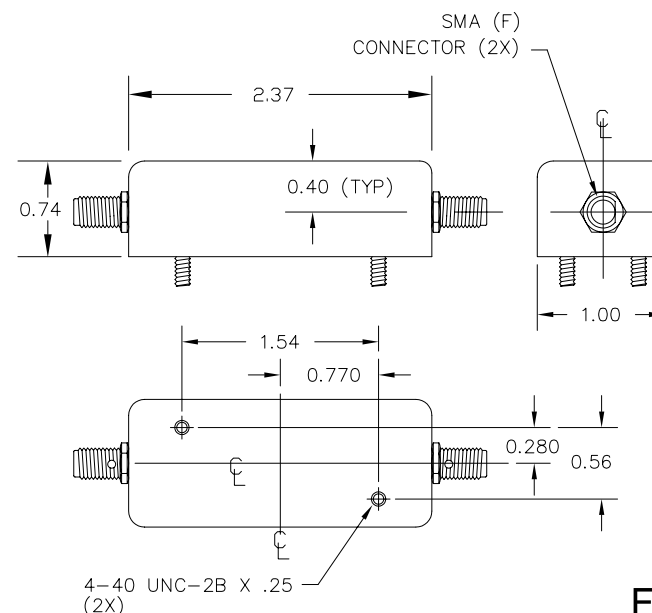

FN-2337W
(STYLE F)

FN-2337W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 10/20/03

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.