



BAND PASS CRYSTAL FILTER


F_o: 70.0 MHz
 IMPEDANCE : 50 OHMS
 INSERTION LOSS: 10.0 dB MAX
 RIPPLE: 1.0 dB MAX
 3dB BANDWIDTH: 500 KHz MIN
 60dB BANDWIDTH: 2.0 MHz MAX
 SPURIOUS ATTENUATION: 50 dB MIN
 OPERATING TEMPERATURE: 0°C to +60°C

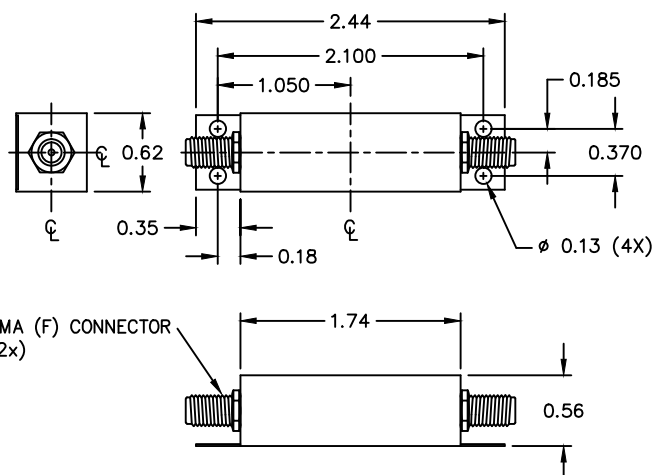

FN-1406WT

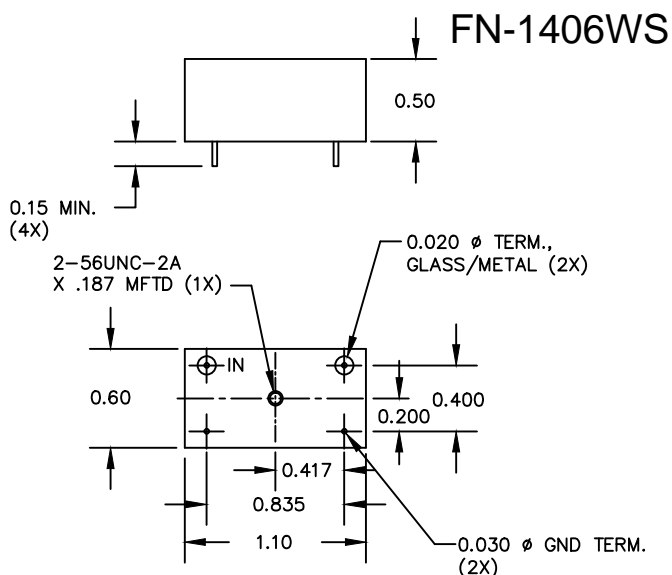

FN-1406WS

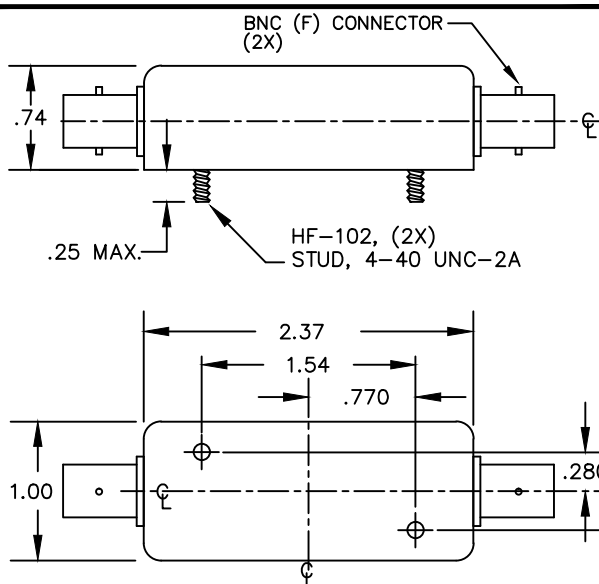

FN-1406WK

FN-1406W DRAWING SUMMARY


FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
 .XXX = ± .010

ANGLE = ± 1°
 HOLES = ± .002

REVISED 01/23/2012

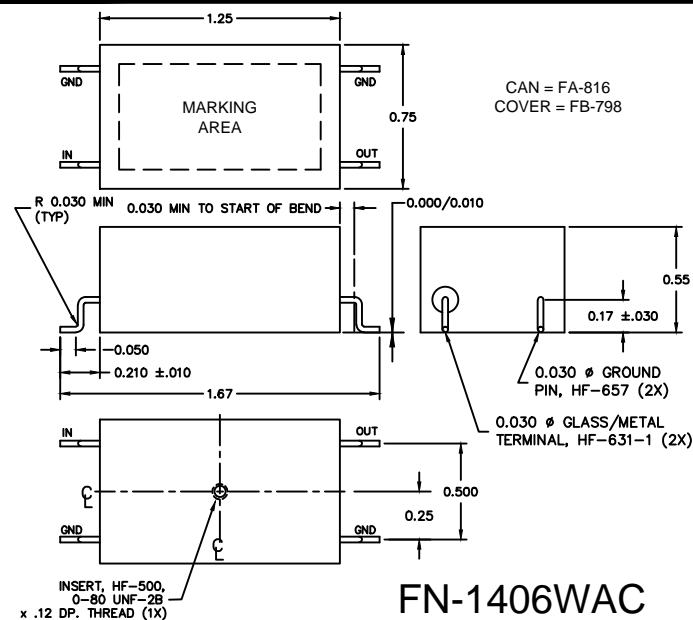

FN-1406WAC