


BANDPASS FILTER

Fo: 300 MHz
 IMPEDANCE : 50 ohm IN/OUT
 INSERTION LOSS: 2.0 MAX
 RIPPLE : 0.1 dB MAX
 2dB BANDWIDTH: 26 MHz MIN
 20dB BANDWIDTH: 230 MHz MAX
 20dB MINIMUM @: 272 MHz
 25dB MINIMUM @: 450 MHz
 OPERATING POWER: 10 WATTS MAX
 OPERATING TEMPERATURE : +15°C to +35°C

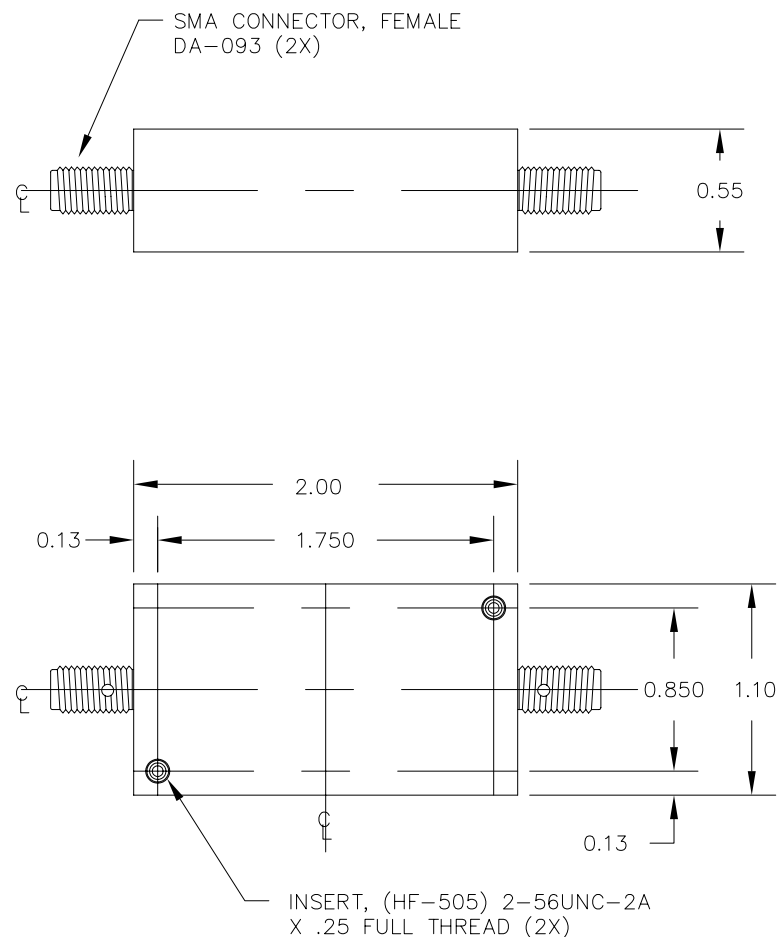

FN-2348W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$
 .XX = $\pm .020$
 .XXX = $\pm .010$

HOLES
 $\pm .002$

REVISED 10/20/03