

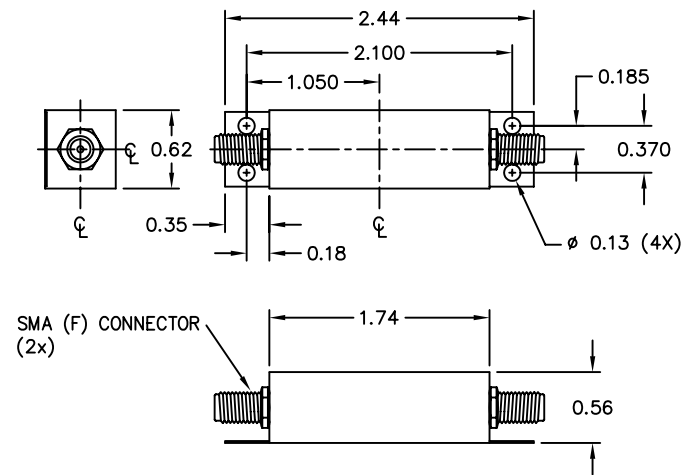


BANDPASS FILTER

Fo: 15.0 MHz
3dB BANDWIDTH: 600 KHz MIN
50 dB BANDWIDTH: 6 MHz MAX
INSERTION LOSS: 3.5 dB MAX
IMPEDANCE: 50 OHMS (IN & OUT)
RIPPLE: 0.1 dB MAX
OPERATING TEMPERATURE: -30°C to +75°C

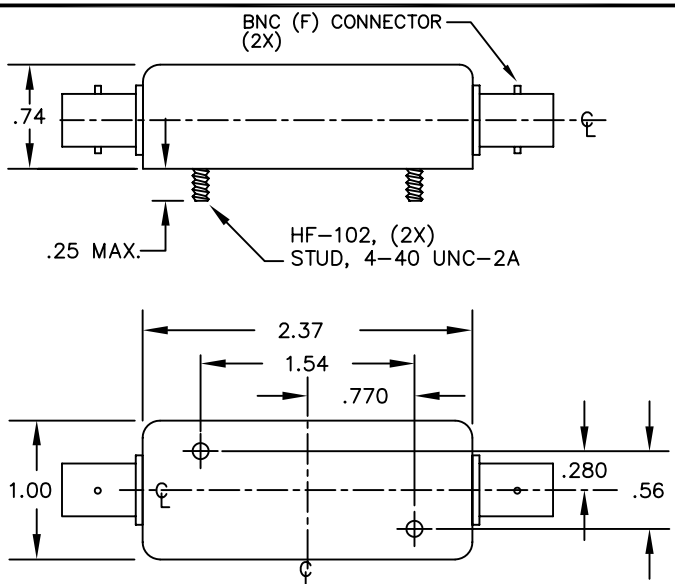

FN-2367WT

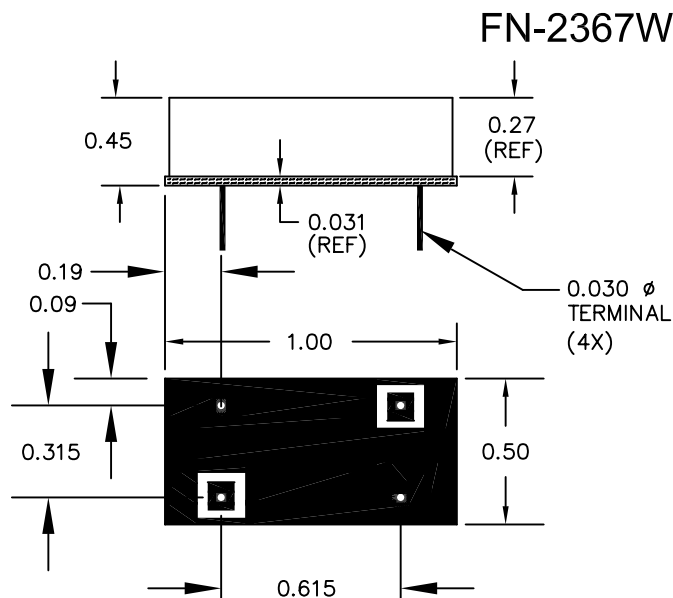

FN-2367WK

FN-2367W DRAWING SUMMARY


FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = $\pm .020$
 .XXX = $\pm .010$

ANGLE = $\pm 1^\circ$
 HOLES = $\pm .002$

REVISED 02/07/2013 PER ECO 4359

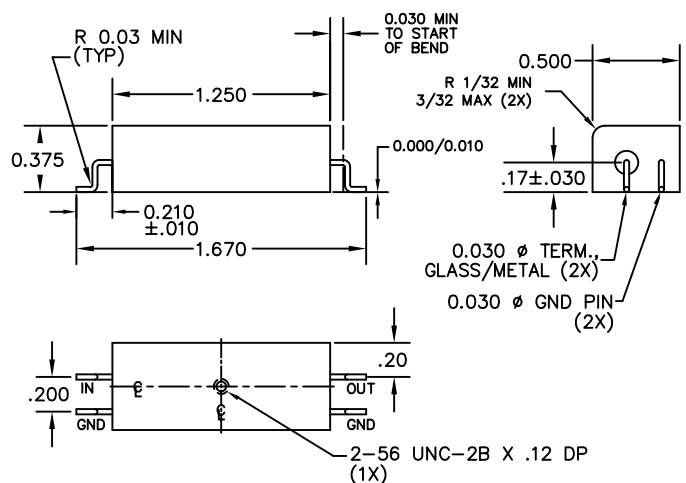

FN-2367WEE