



# BANDPASS FILTER



**Fo:** 80.0 MHz  
**IMPEDANCE :** 50 OHMS (IN & OUT)  
**INSERTION LOSS:** 6 dB MAX  
**RIPPLE:** .25 dB MAX  
**3dB BANDWIDTH:** 4.0 KHz MIN  
**30dB BANDWIDTH:** ± 11 KHz MAX  
**50dB BANDWIDTH:** ± 25 KHz MAX  
**SPURIOUS ATTENUATION:** 50 dB MIN  
**OPERATING TEMPERATURE :** -32°C to +80°C

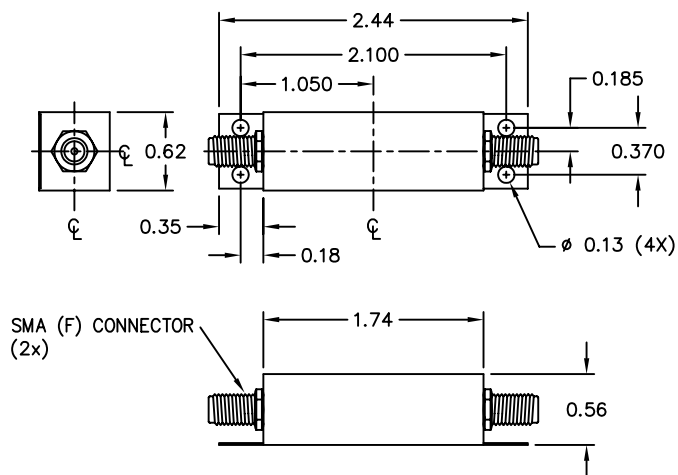

**FN-1781WT**

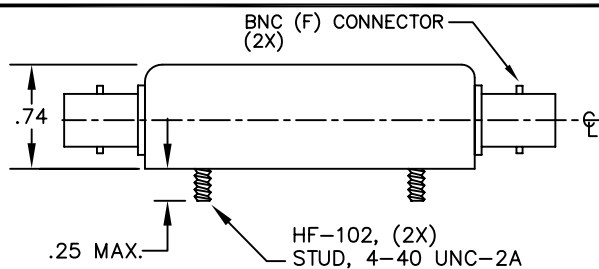

**FN-1781WS**

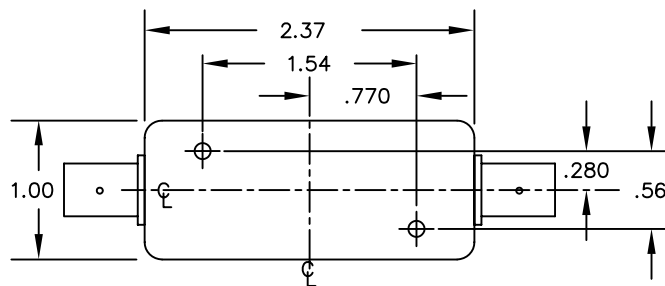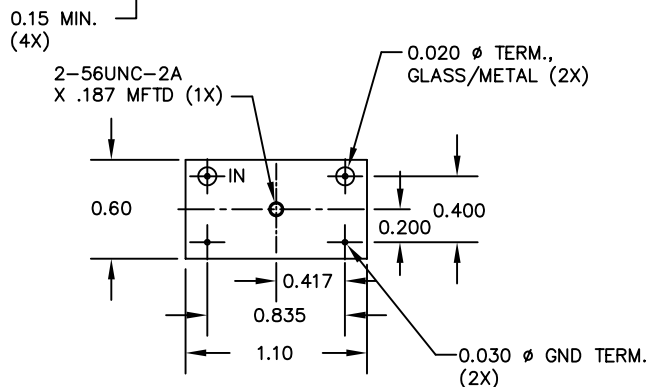

**FN-1781WK**


## FN-1781W DRAWING SUMMARY

**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020	ANGLE = ± 1°
.XXX = ± .010	HOLES = ± .002

REVISED 09/07/12

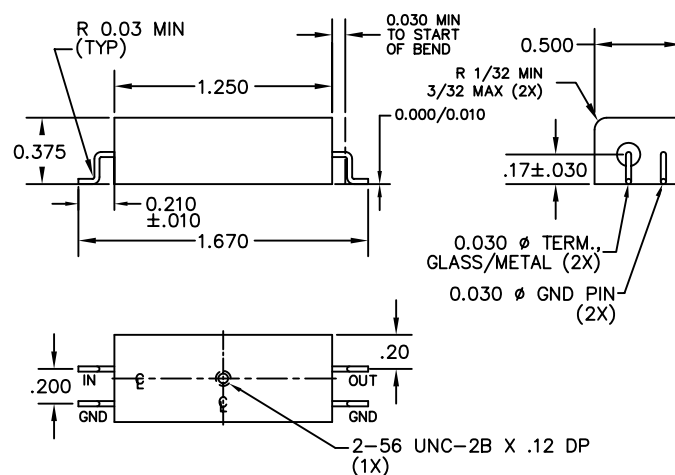

**FN-1781WEE**