


BANDPASS FILTER




Fo: 148.275 MHz
IMPEDANCE : 50 OHMS (IN & OUT)
INSERTION LOSS: 5 dB MAX
RIPPLE: 0.75 dB MAX
3 dB BANDWIDTH: 45 KHz MIN
60 dB BANDWIDTH: 330 KHz MAX
OPERATING TEMPERATURE : -10°C to +55°C

FN-1801W

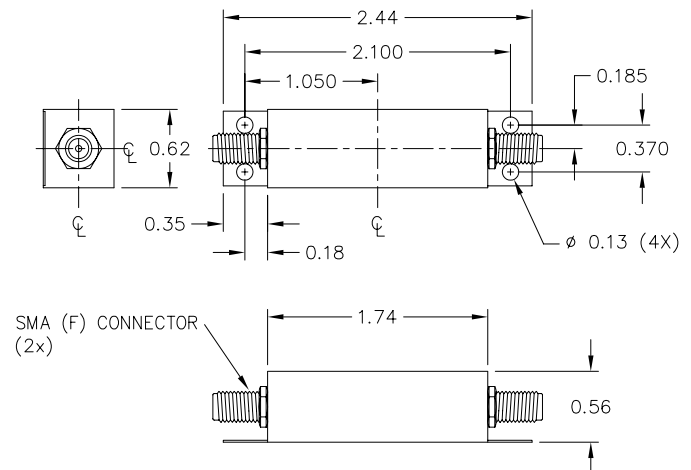

FN-1801WT

FN-1801WS

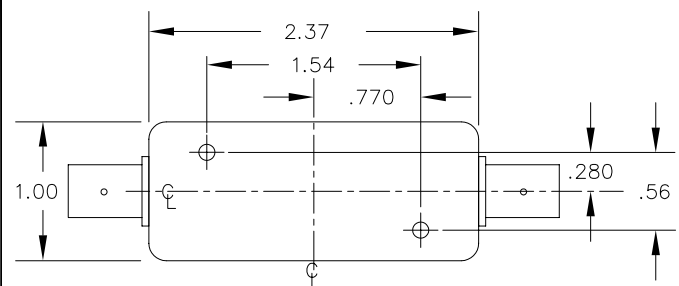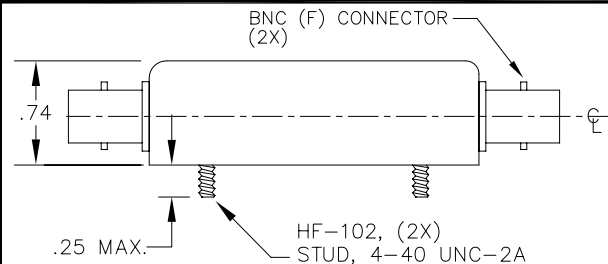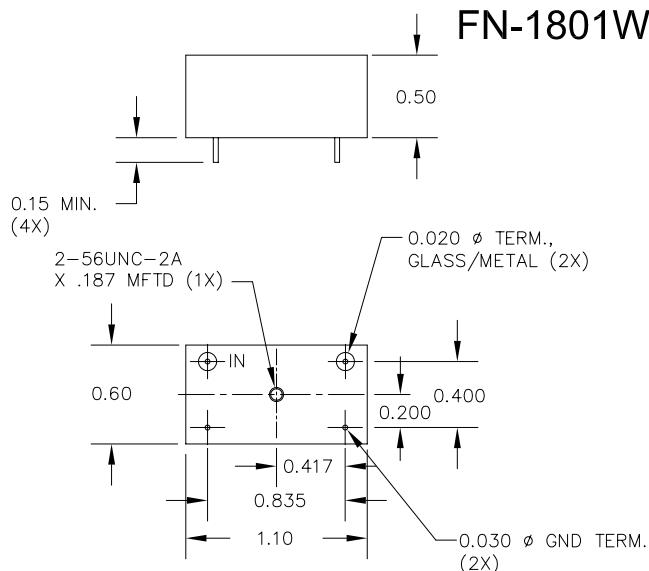

FN-1801WK

FN-1801W DRAWING SUMMARY


FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = $\pm .020$
 .XXX = $\pm .010$

ANGLE = $\pm 1^\circ$
 HOLES = $\pm .002$

REVISED 9/22/03

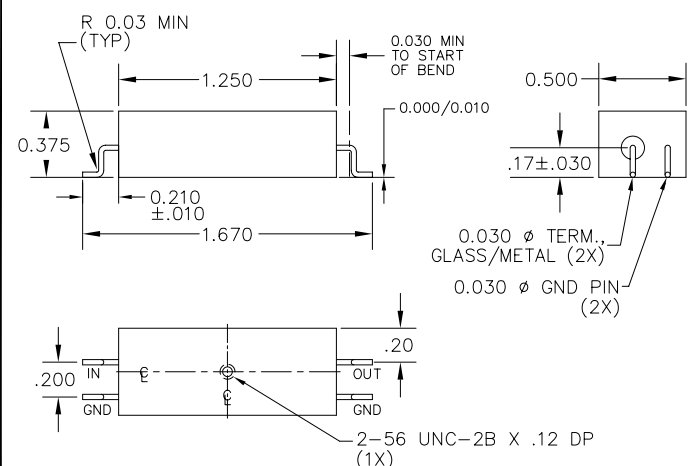

FN-1801WEE