

CRYSTAL BANDPASS FILTER

Fo: 4.43361875MHz

INSERTION LOSS: 3 dB MAX

1 dB BANDWIDTH: ± 3 KHz Max

STOP BAND 30 dB: ± 30 KHz Max


RIPPLE: ± 1 dB Max

Z IN/OUT: 50 Ohm

OPERATING TEMPERATURE:

LABORATORY CONDITION

CRYSTAL BP FILTER
FN-1973
Fo=4.43361875MHz
FILTRONETICS, INC.
KC, MO.
[D/C] [S/N]

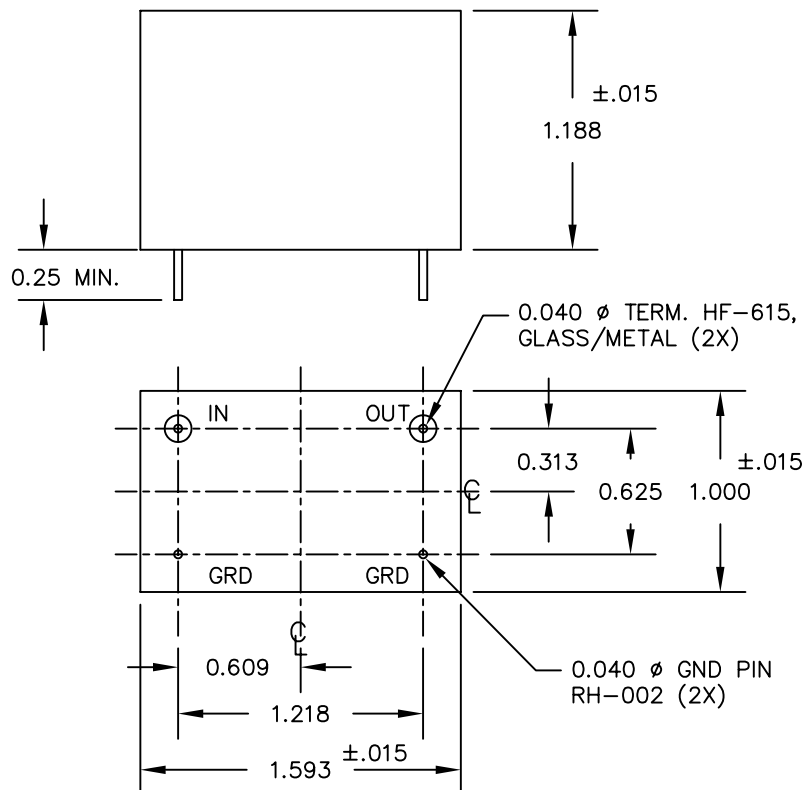

FN-1973W DRAWING SUMMARY

FILTRONETICS, INC.
6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = $\pm .020$
.XXX = $\pm .010$

ANGLE = $\pm 1^\circ$
HOLES = $\pm .002$

ISSUED 06/05/2014

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY.
DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.