


LOWPASS FILTER

2 dB CUTOFF: 150 MHz
 IMPEDANCE: 50 OHMS (IN & OUT)
 INSERTION LOSS: 0.5 dB MAXIMUM
 RIPPLE: 0.5 dB MAXIMUM
 15 dBc MINIMUM: 160 to 169.99 MHz
 55 dBc MINIMUM: 170 to 350 MHz
 INPUT POWER: 10 WATTS PEAK, 1 W Avg
 OPERATING TEMPERATURE: -55°C to +85°C

FN-3699WLL

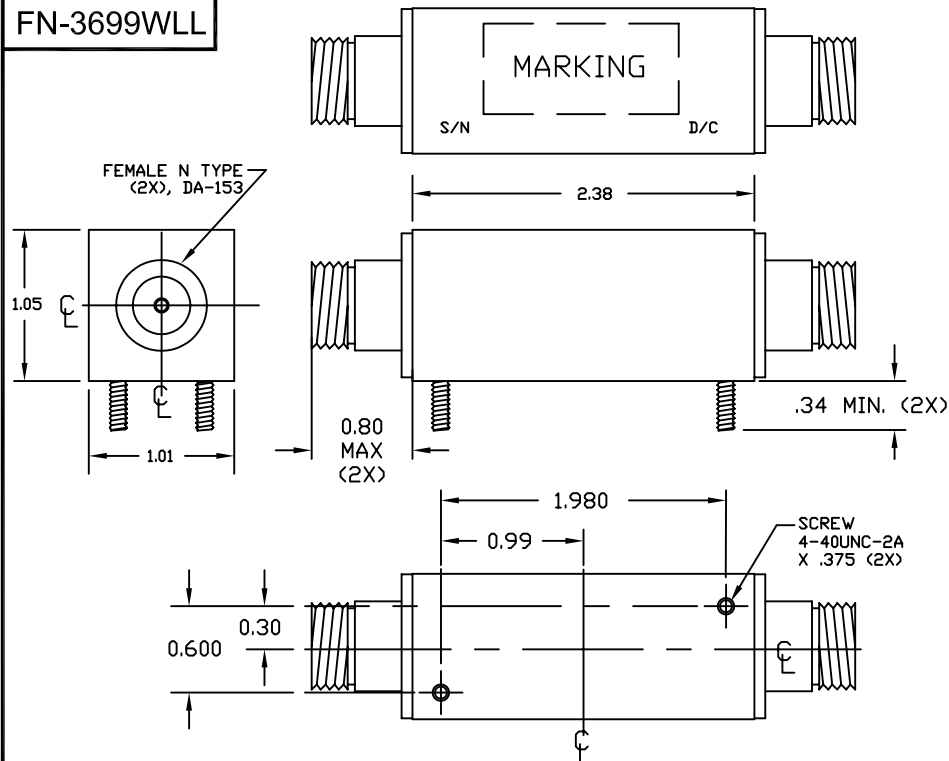

FN-3699W DRAWING SUMMARY

FILTRONETICS, INC.

6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 01/24/2014

FN-3699W

