


BANDPASS FILTER




Fo:	21.4 MHz
IMPEDANCE :	50 OHMS (IN & OUT)
INSERTION LOSS:	7 dB MAX
RIPPLE:	1.0 dB MAX
3dB BANDWIDTH:	±115 KHz MIN (±125 KHz TYP)
60dB BANDWIDTH:	630 KHz MAX
SPURIOUS ATTENUATION:	60 dB MIN
OPERATING TEMPERATURE :	0°C to +60°C

FN-2145W

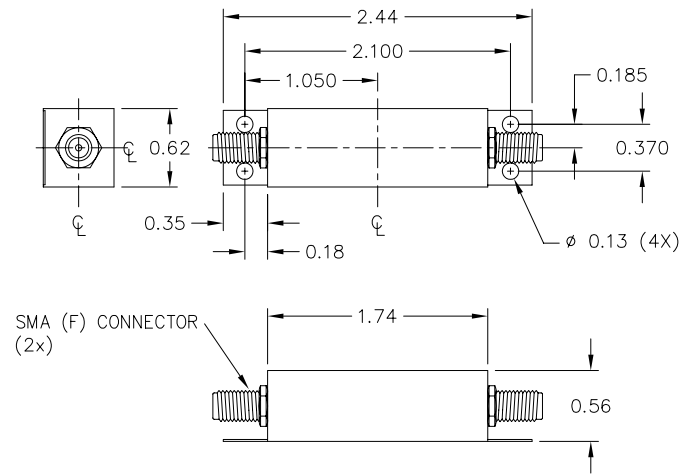

STYLE T

FN-2145W

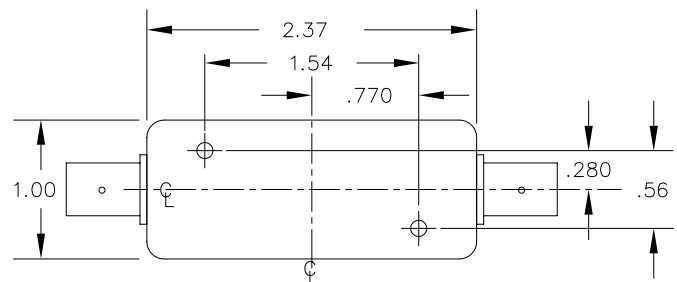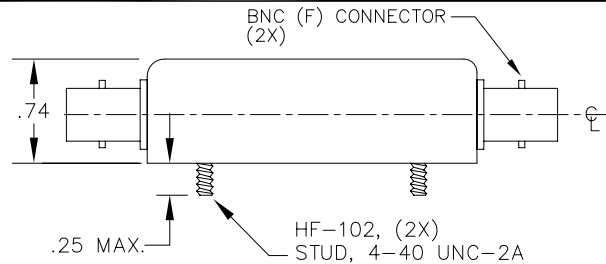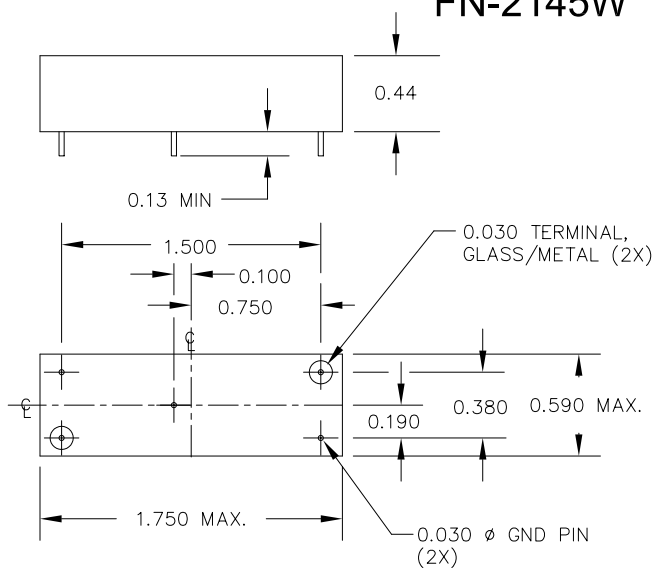

STYLE K

FN-2145W DRAWING SUMMARY


FILTRONETICS, INC.
6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

$$\begin{aligned} .XX &= \pm .020 \\ .XXX &= \pm .010 \end{aligned}$$

ANGLE = $\pm 1^\circ$
HOLES = $\pm .002$

REVISED 12/31/02

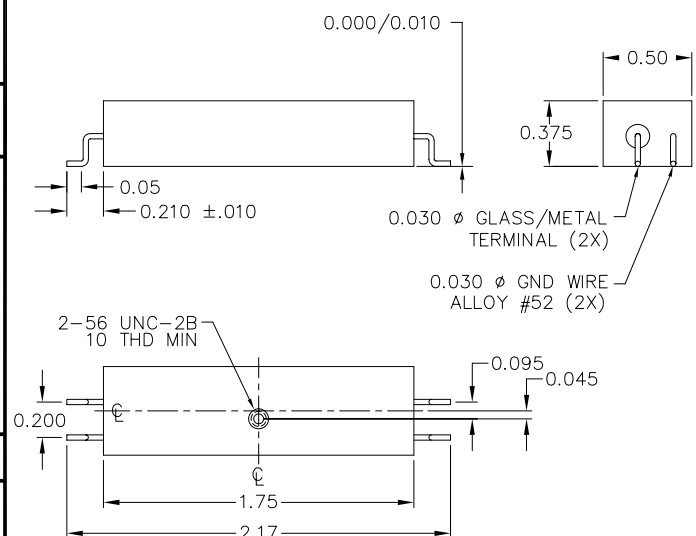

STYLE FF

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY.
DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.