




# BANDPASS FILTER

**Fo:** 21.4 MHz  
**IMPEDANCE :** 50 OHMS (IN & OUT)  
**INSERTION LOSS:** 8 dB MAX @ Fo  
**RIPPLE:** 2.5 dB MAX  
**3dB BANDWIDTH:** ±100 KHz MIN  
**60dB BANDWIDTH:** ±180 KHz MAX  
**SPURIOUS ATTENUATION:** 60 dB MIN  
**ULTIMATE ATTENUATION :** 60 dB to 80 MHz,  
 45 dB to 160 MHz  
**VIBRATION (10 - 2000 Hz):** 30 Grms  
**SHOCK (11 mSEC) :** 100 G  
**OPERATING TEMPERATURE :** -40°C to +80°C

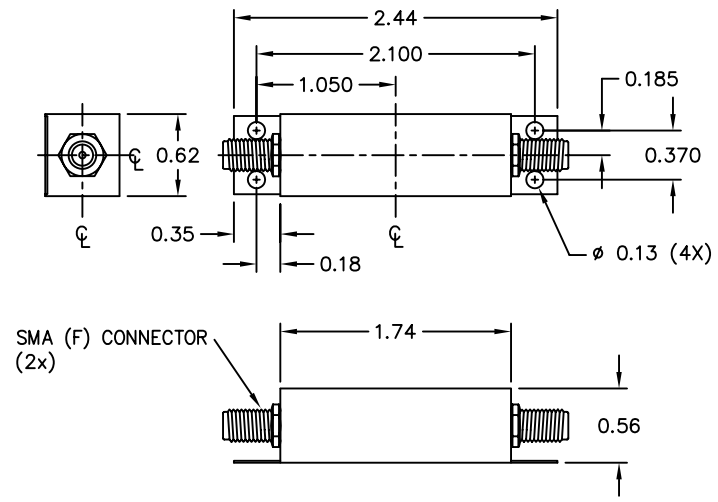

**FN-2325WT**

## FN-2325W

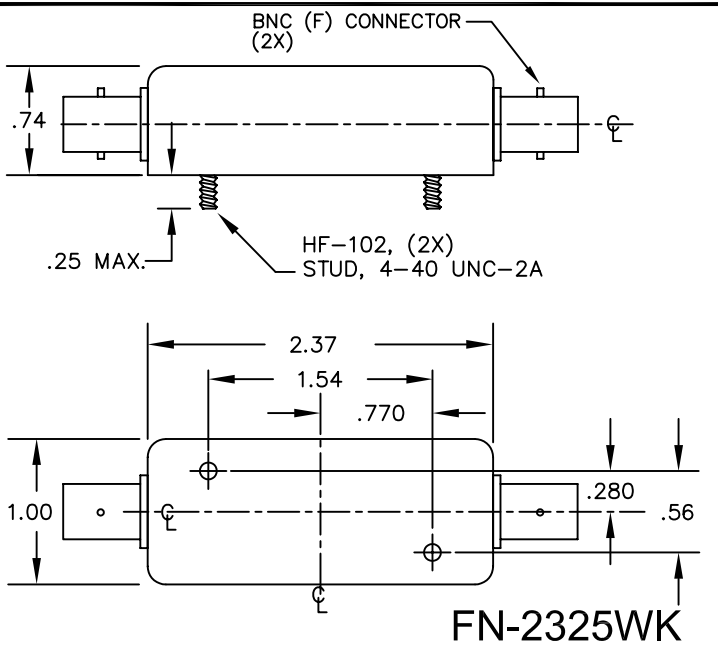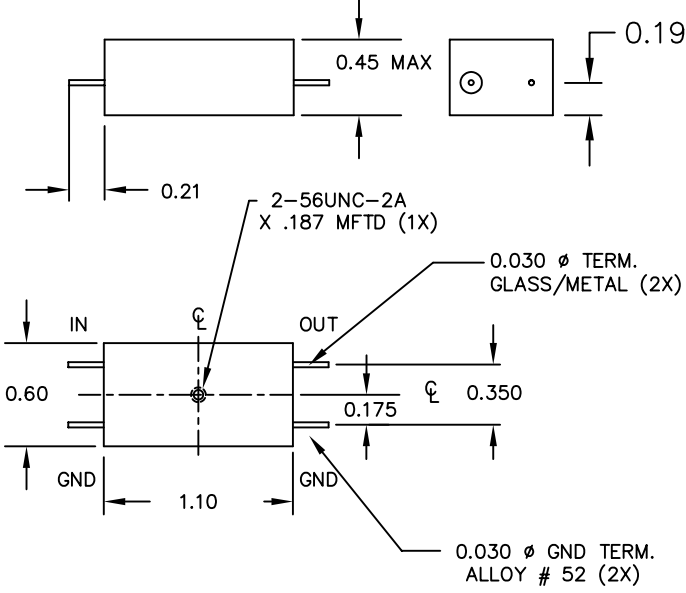

**FN-2325WK**


## FN-2325W DRAWING SUMMARY

**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020	ANGLE = ± 1°
.XXX = ± .010	HOLES = ± .002

REVISED 12/31/02

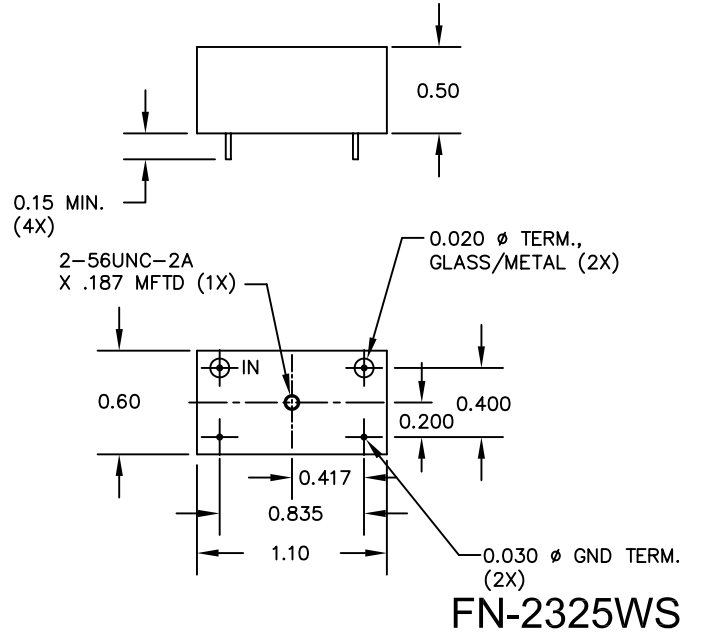

**FN-2325WS**