


BANDPASS FILTER

Fo: 10.7 MHz
 6dB BANDWIDTH: 25 KHz MIN
 70 dB BANDWIDTH: 52 KHz MAX
 SPURIOUS ATTENUATION: 60 dB MIN
 INSERTION LOSS: 2.0 dB MAX
 IMPEDANCE: 50 OHMS (IN & OUT)
 RIPPLE: 1.0 dB MAX
 OPERATING TEMPERATURE: -55°C to +85°C

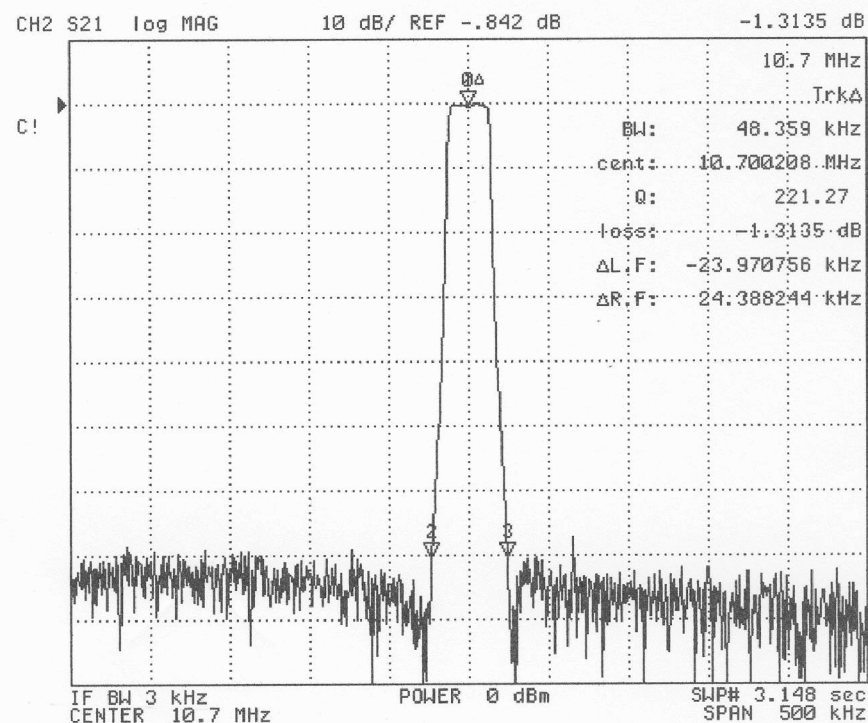

FN-3854W DRAWING SUMMARY SHEET 1 of 2

FILTRONETICS, INC.


6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED


ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 7/3/07

FN-3854WF

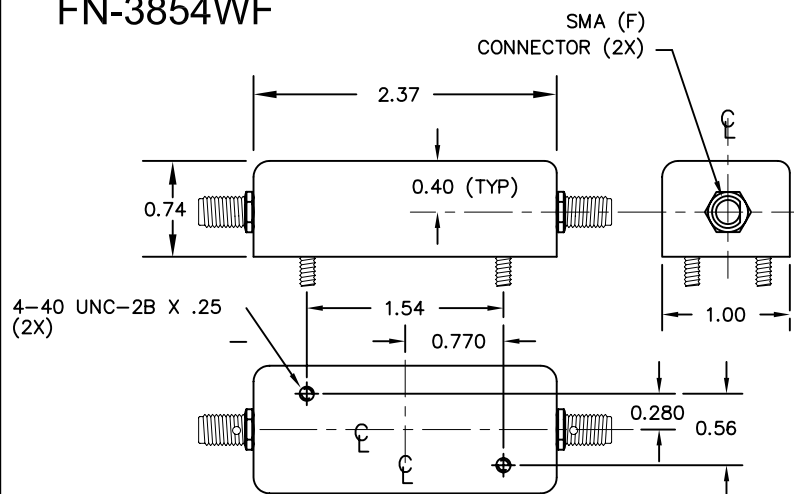

FN-3854W (STYLE PP)

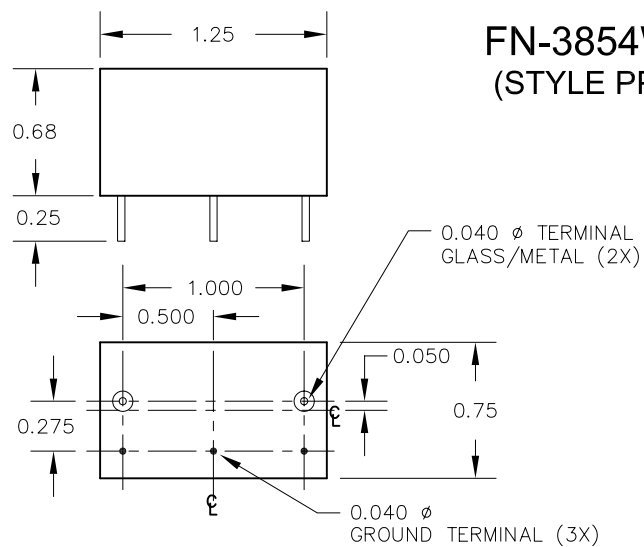

FN-3854W DRAWING SUMMARY SHEET 2 of 2


FILTRONETICS, INC.
6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 7/3/07

FN-3854W

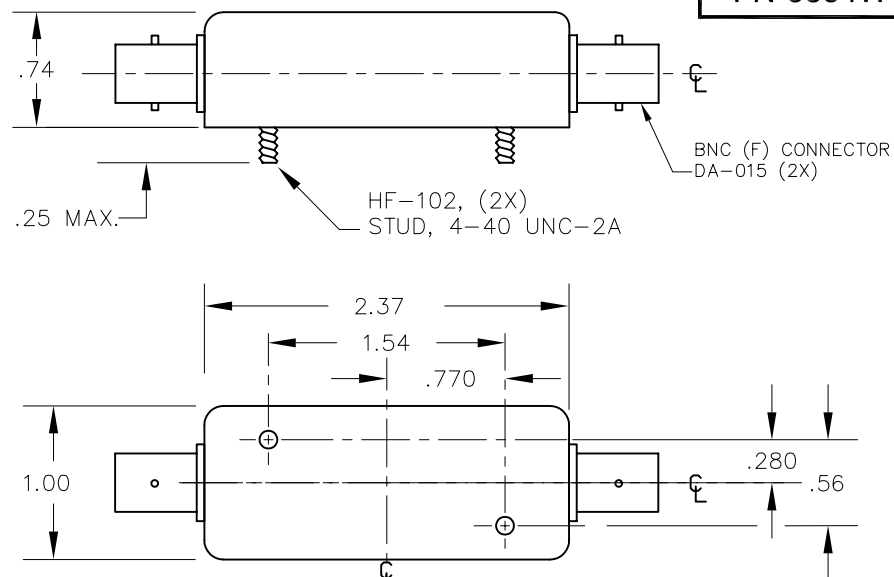

FN-3854WK

FN-3854WAC

