

CRYSTAL BANDPASS FILTER

Fo: 70 MHz

IMPEDANCE : 50Ω

INSERTION LOSS: 5 dB MAX

3dB BANDWIDTH: 350 kHz MIN

20 dB BANDWIDTH: 1.0 MHz MAX


40 dB BANDWIDTH: 2.0 MHz MAX

50dB BANDWIDTH: 3.5 MHz MAX


60dB BANDWIDTH: 7.0MHz MAX

SPURIOUS: 50 dB MIN

FN-2881WS

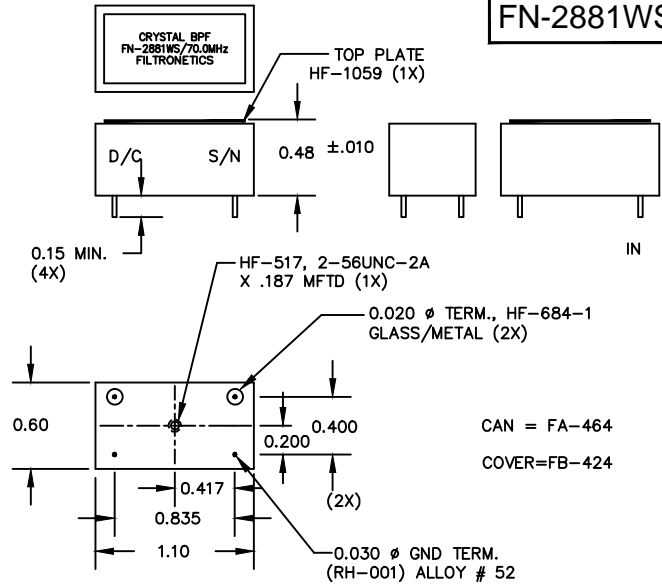


FN-2881W

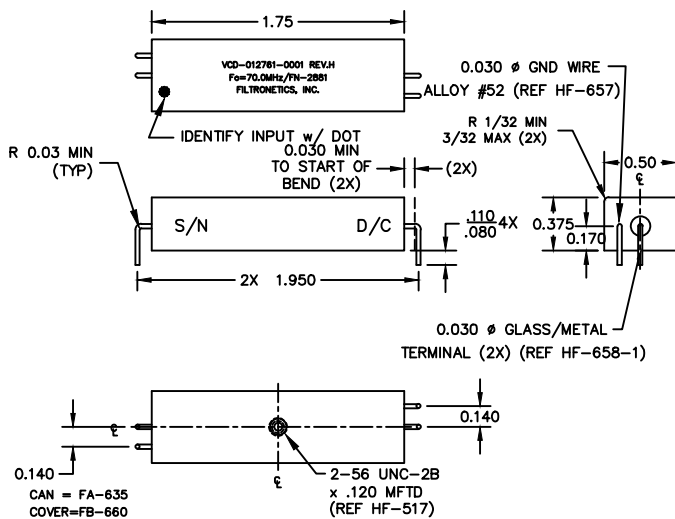

FN-2881WK

NOTE:
SHIP WITH 4-40 LOCKWASHERS
AND HEX NUTS.

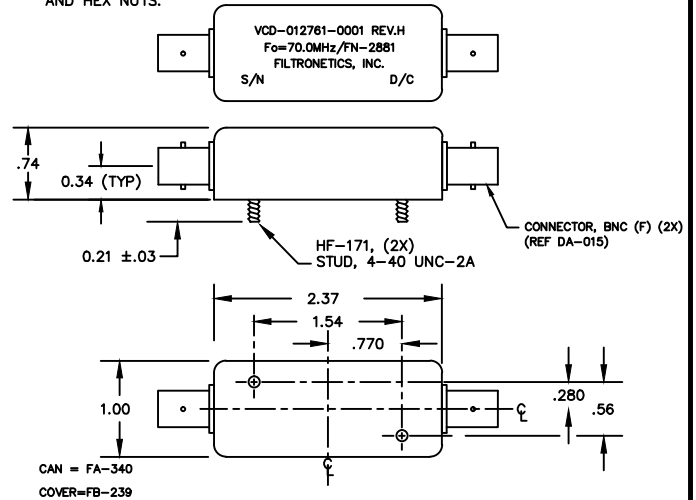

FN-2881W DRAWING SUMMARY

FILTRONETICS, INC.

6010 PARRETTA DR.
KANSAS CITY, MO 64120

816-231-7375

FAX 816-241-0368

WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020

.XXX = ± .010

ANGLE = ± 1°

HOLES = ± .002

REVISED

FN-2881WT

