
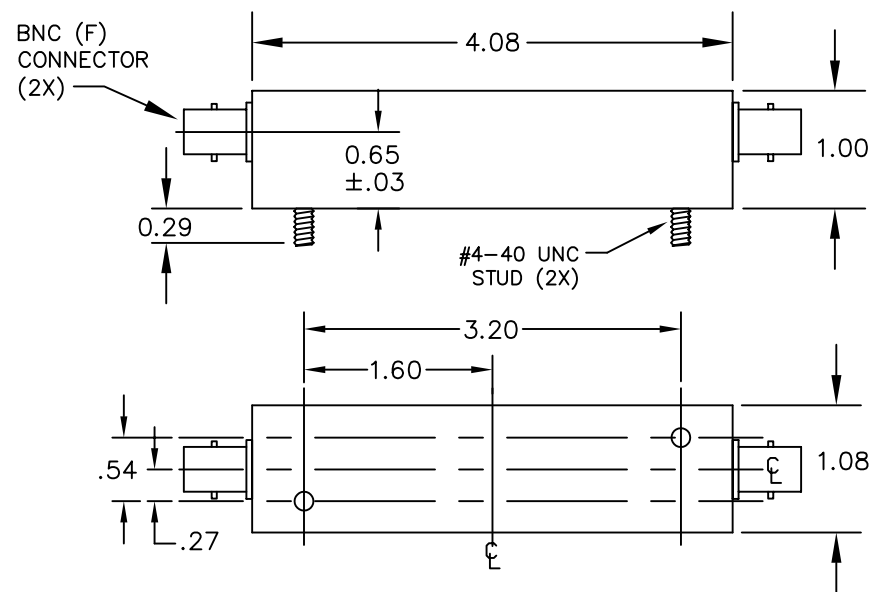


LOW PASS FILTER

Fc: 3.0 KHz
 IMPEDANCE : 50 OHM (IN/OUT)
 INSERTION LOSS: 0.5 dB MAX
 RIPPLE: 0.5 dB MAX
 1dB CUTOFF: 3.0 KHz MIN
 20dB STOPBAND: 4.5 KHz MAX
 60dB STOPBAND: 5.7 KHz MAX
 OPERATING TEMPERATURE : -40°C to +85°C

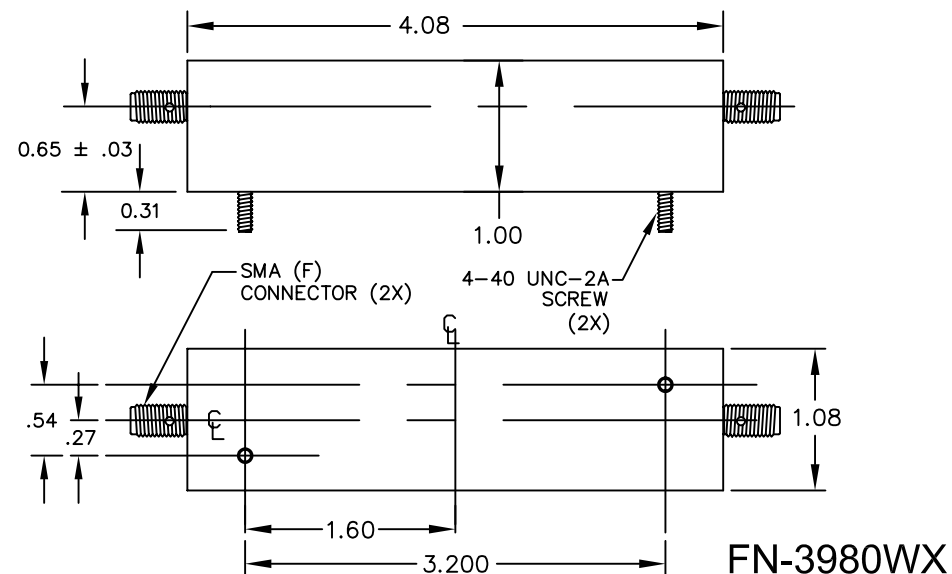

FN-3980W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES $\pm .002$
.XX = $\pm .020$	
.XXX = $\pm .010$	

RESTORED 04/17/12