



BANDPASS FILTER


Fo: 80 MHz
3dB BANDWIDTH: 25 KHz MIN
60 dB BANDWIDTH: 170 KHz MAX
INSERTION LOSS: 4.0 dB MAX
IMPEDANCE: 50 OHMS (IN & OUT)
RIPPLE: 1.0 dB MAX
SPURIOUS ATTENUATION: 50dB MIN
INPUT POWER: 0 dBm MAX
OPERATING TEMPERATURE: 0°C to +75°C

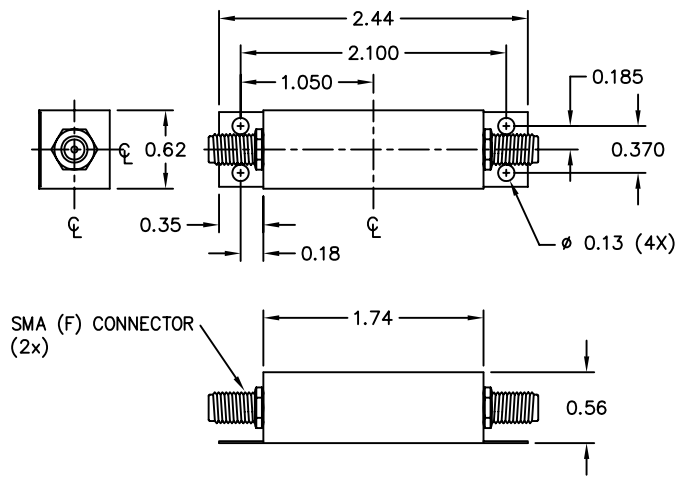


FN-3340W

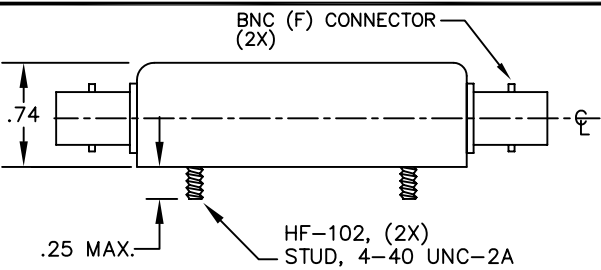


FN-3340WK

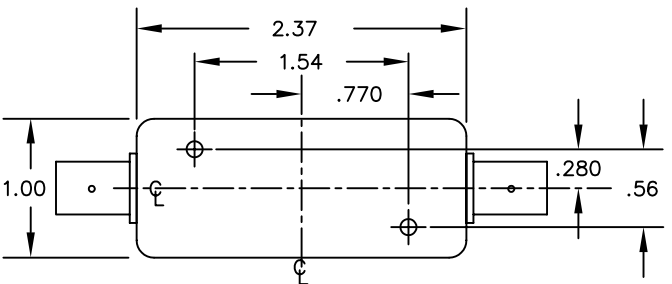


FN-3340WK

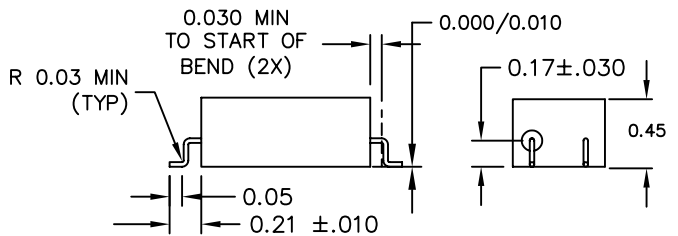

FN-3340WAA

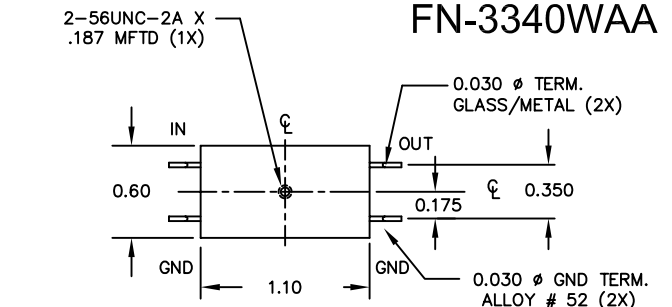

FN-3340WS

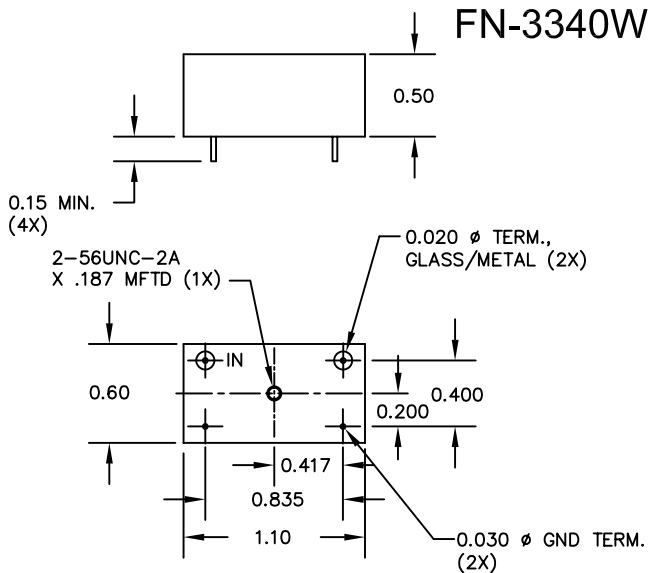

FN-3340W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
.XXX = ± .010

ANGLE = ± 1°
HOLES = ± .002

REVISED 5/15/2007