



# BANDPASS FILTER

**Fo:** 100 KHz  $\pm$  6 Hz  
**IMPEDANCE :** 50 ohms  
**INSERTION LOSS:** 1.0 dB MAX  
**RIPPLE:** 1.0 dB MAX  
**3dB BANDWIDTH:** 200 Hz NOM  
**60dB BANDWIDTH:** 1.2 KHz MAX  
**OPERATING TEMPERATURE :** 0°C to +60°C


FN-3398W

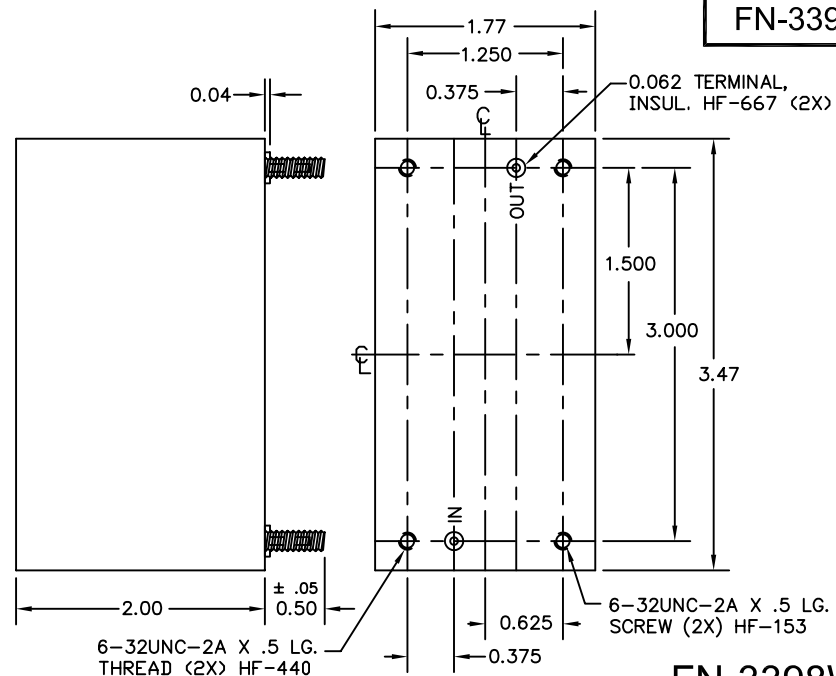

FN-3398W

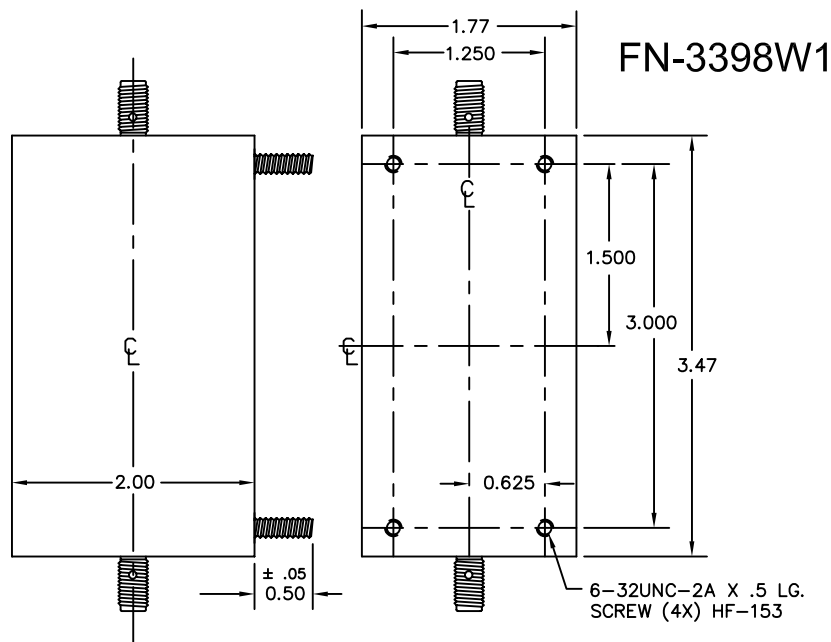

FN-3398W1

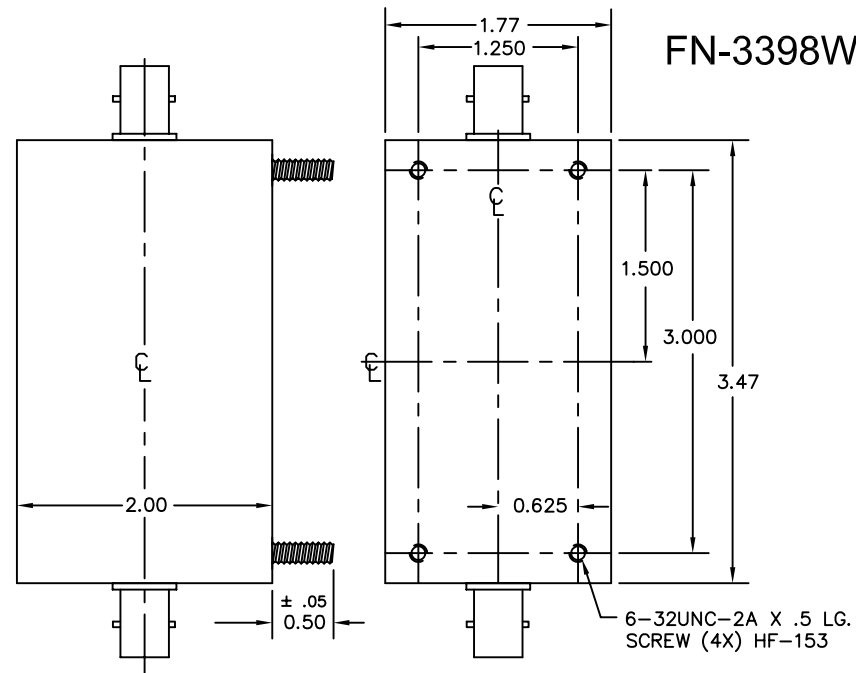

FN-3398W2

## FN-3398W DRAWING SUMMARY

**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm$ 1°	HOLES
.XX = $\pm$ .020	$\pm$ .002
.XXX = $\pm$ .010	

REVISED 5/20/2005