


BANDPASS FILTER


Fo: 466.9875 MHz *
 IMPEDANCE : 50 OHMS (IN & OUT)
 INSERTION LOSS: 11.0 dB MAX
 RIPPLE: 0.25 dB MAX
 3dB BANDWIDTH: 40 KHz MIN
 30dB BANDWIDTH: 650 KHz MAX
 SPURIOUS ATTENUATION: 25 dB MIN
 OPERATING TEMPERATURE : 0°C to +40°C
 INPUT POWER : -5 dBm MAX

* OTHER CENTER FREQUENCIES, BANDWIDTHS &
 PACKAGE OPTIONS AVAILABLE - CONSULT FACTORY


FN-3443W

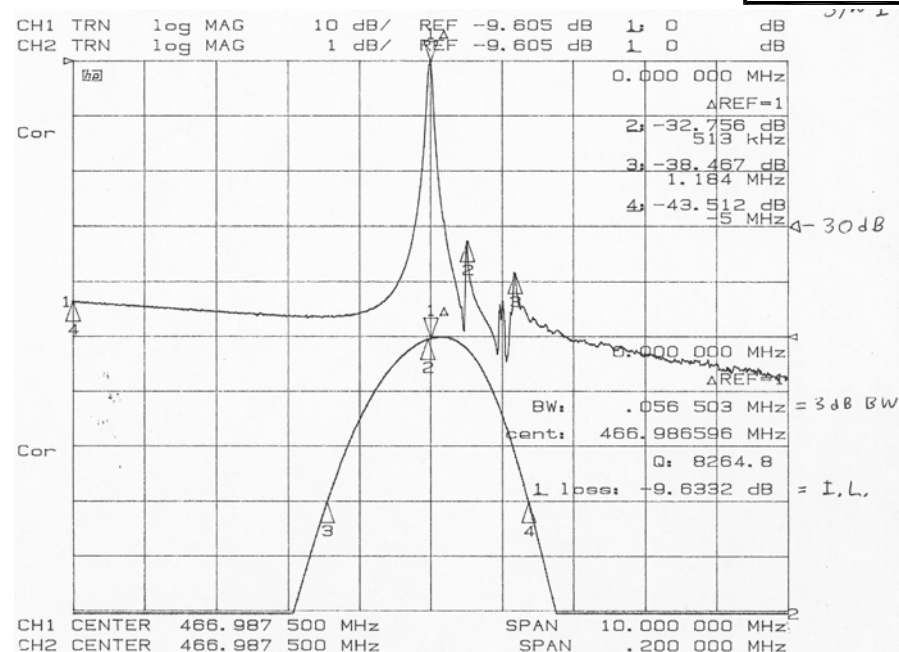

FN-3443WT

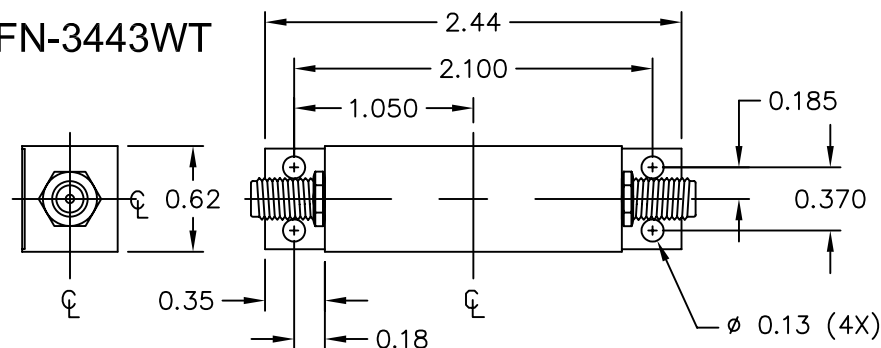

SMA (F) CONNECTOR (2x)

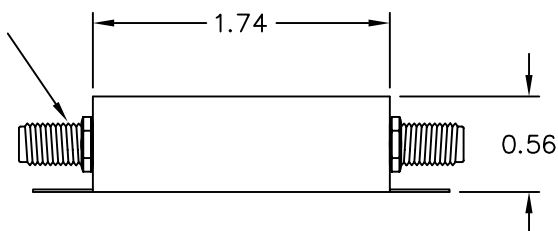

FN-3443W DRAWING SUMMARY SHEET 1 of 2

FILTRONETICS, INC.

6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 06/11/12 PER ECO 4379

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.



FILTRONETICS, INC.
6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

FN-3443W

