
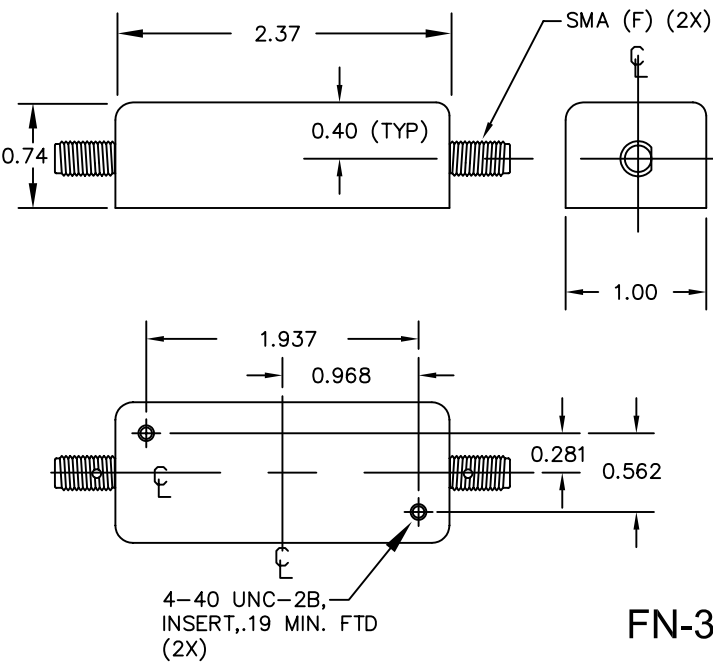


BANDPASS FILTER

Fo: 21.4 MHz
IMPEDANCE : 50 OHMS (IN & OUT)
INSERTION LOSS: 6.5 dB MAX, 5 dB TYPICAL @ +25°C
RIPPLE: 1.5 dB MAX *
3dB BANDWIDTH: 160 KHz MIN
60dB BANDWIDTH: 330 KHz MAX
OPERATING TEMPERATURE : -30°C to +70°C **

* REVISED RIPPLE (WAS 1.0 dB)
** REVISED OPERATING TEMP (WAS -20c TO +70c)




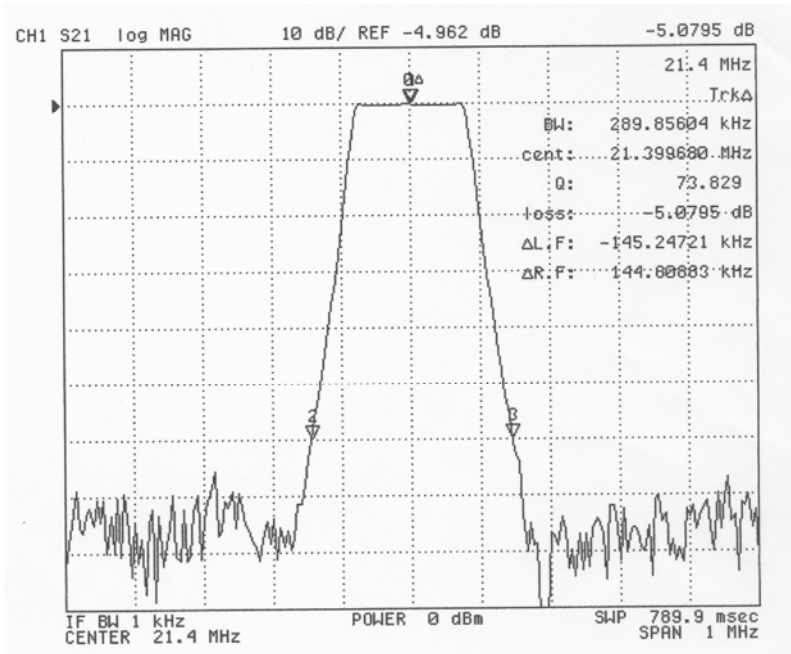


FN-3461WJ

FN-3461W DRAWING SUMMARY SHEET 1 of 2

FILTRONETICS, INC.
6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED	
ANGLE = $\pm 1^\circ$	HOLES $\pm .002$
.XX = $\pm .020$	
.XXX = $\pm .010$	
REVISED 12/30/08	

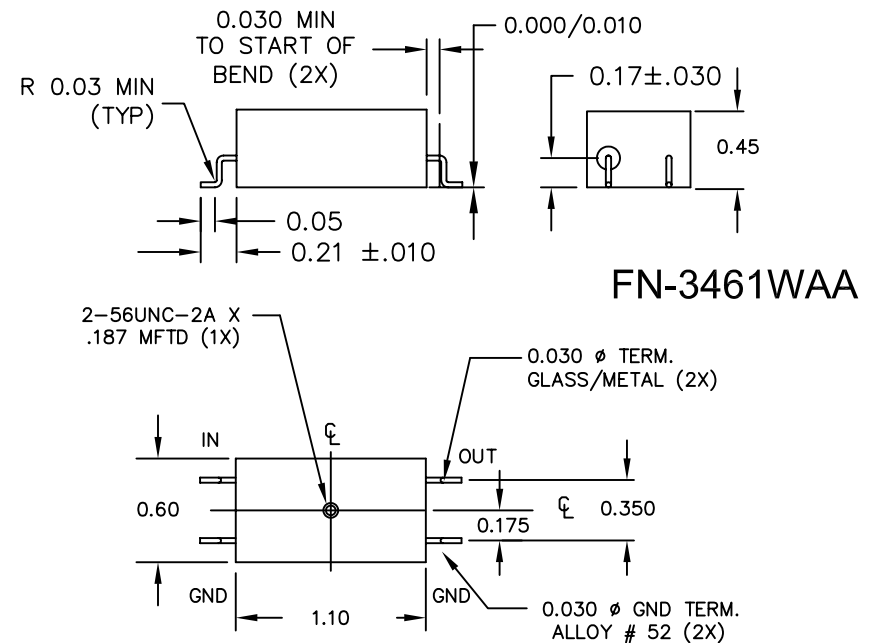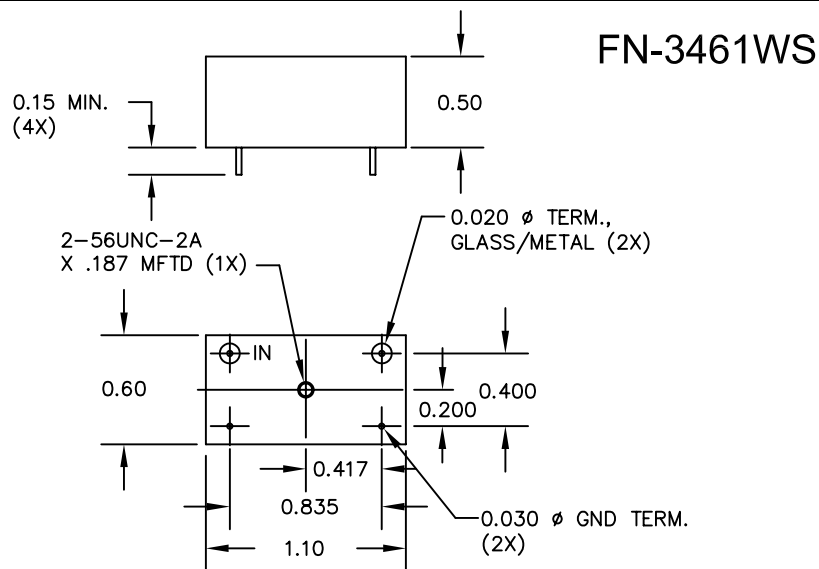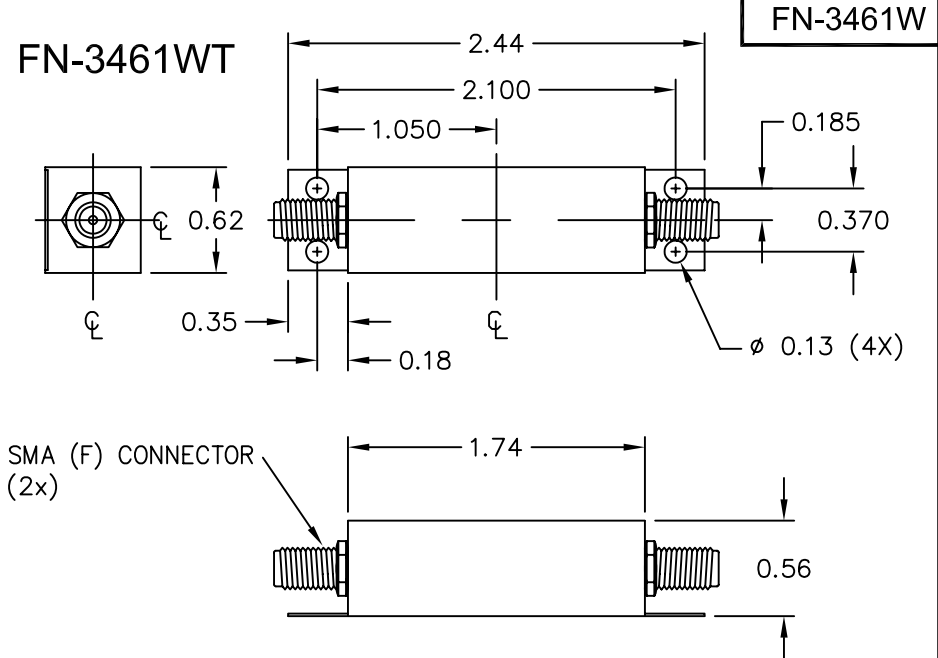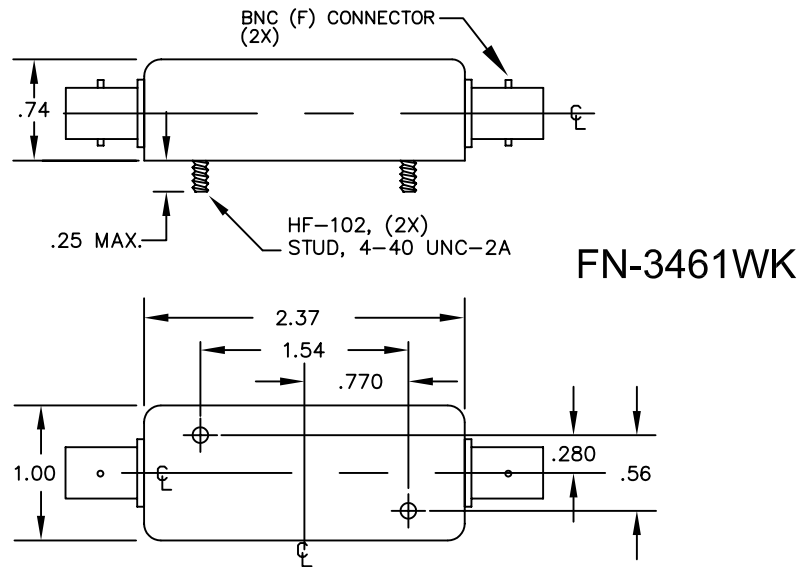

FN-3461W DRAWING SUMMARY SHEET 2 of 2

FILTRONETICS, INC.
6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 5/10/07