


BAND PASS CRYSTAL FILTER

Fo: 221.11875 MHz
IMPEDANCE : 50 OHMS
INSERTION LOSS: 6 dB MAX
PASS BAND RIPPLE: 0.1dB MAX
3dB BANDWIDTH: ±10 KHz MIN
40dB BANDWIDTH: 130 KHz MIN
60dB BANDWIDTH: Fo-45 MHz MIN
SPURIOUS: 20 dB MIN
INPUT POWER: -10dBm MAX
OPERATING TEMPERATURE : 0°C to +50°C
WORKMANSHIP: J-STD-001
RoHS COMPLIANT: NO

FN-3682W

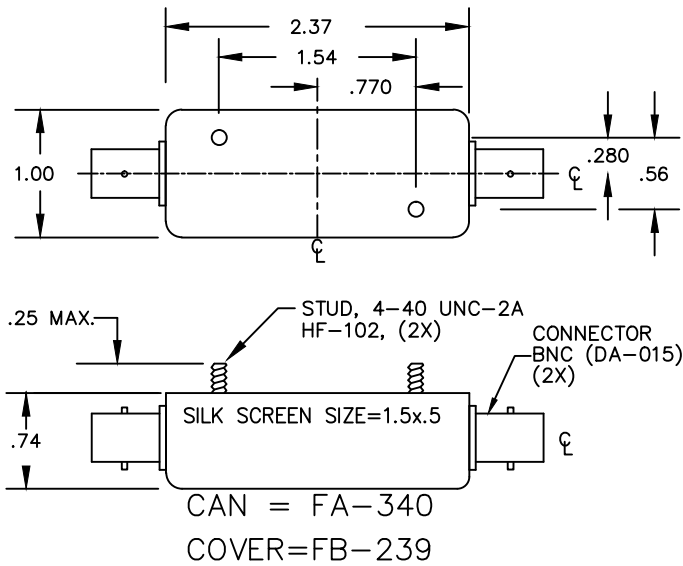

FN-3682W DRAWING SUMMARY


FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
 .XXX = ± .010

ANGLE = ± 1°
 HOLES = ± .002

REVISED 03/14/2013

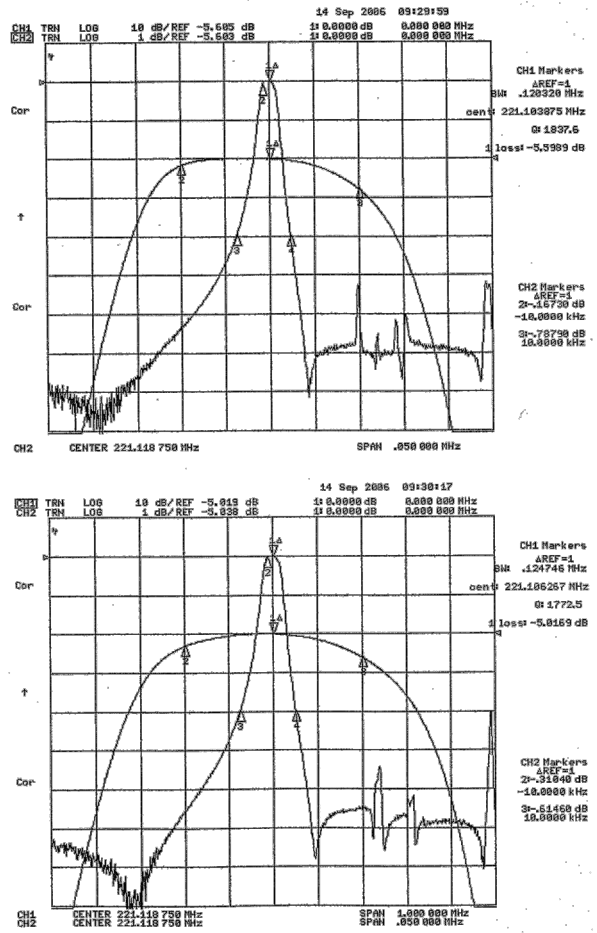

CENTER FREQUENCY CAN BE CUSTOMIZED, PLEASE CONTACT FACTORY.