

FN-3819WDD-1

LOW PASS FILTER

3 dB CUT-OFF :

250 KHz (3dB MAX @ 250 KHz)

IMPEDANCE : 50 OHMS IN/OUT

INSERTION LOSS: 0.5 dB MAX

PASS BAND RIPPLE: 0.5 dB MAX


STOP BAND:

70 dB @ 300 KHz to 10 MHz


OPERATING TEMPERATURE : +25° C

WORKMANSHIP: J-STD-001

RoHS COMPLIANT: NO

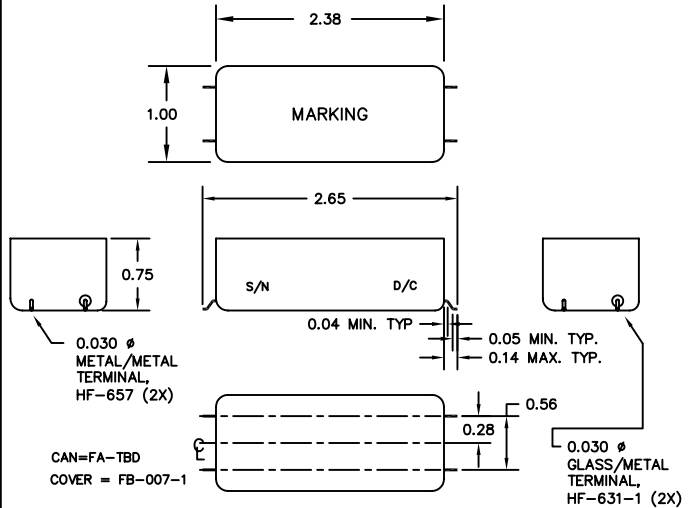

FN-3819W

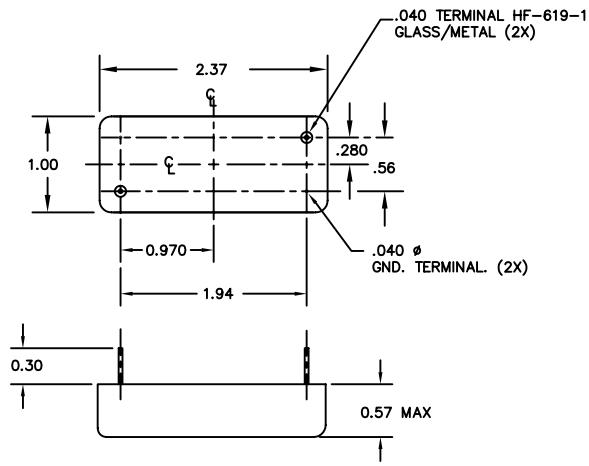

CAN=FA-296
 ALT CAN=FA-592
 COVER=FB-241
 ALT COVER=FB-576-1

FN-3819W DRAWING SUMMARY

FILTRONETICS, INC.

6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
 .XXX = ± .010

ANGLE = ± 1°
 HOLES = ± .002

REVISED 10/10/12 PER ECO 4416