


BANDPASS FILTER



Fo: 100 MHz
3dB BANDWIDTH: 25 KHz MIN
60 dB BANDWIDTH: 170 KHz MAX
INSERTION LOSS: 4.0 dB MAX
IMPEDANCE: 50 OHMS (IN & OUT)
RIPPLE: 1.0 dB MAX
SPURIOUS ATTENUATION: 50dB MIN
INPUT POWER: 0 dBm MAX
OPERATING TEMPERATURE: 0°C to +75°C

FN-3857W

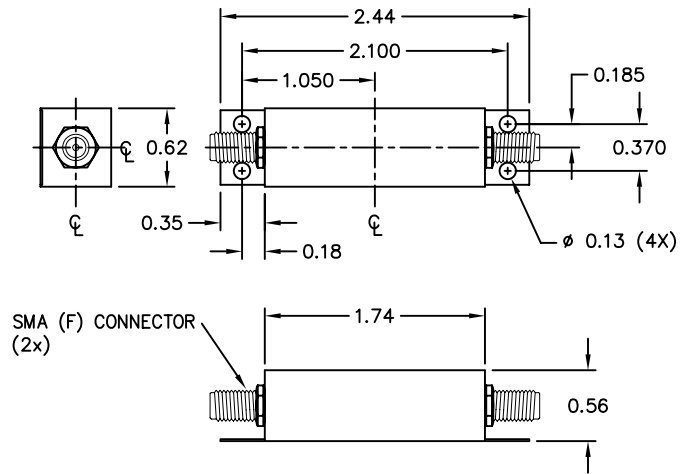

FN-3857WT

FN-3857WS

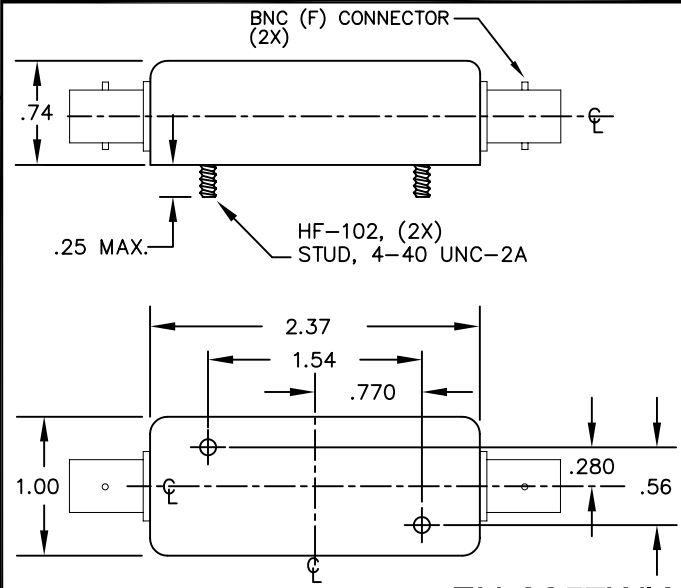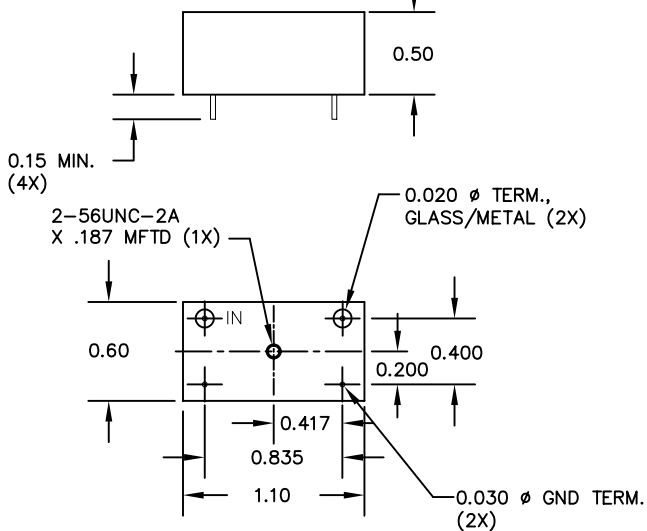

FN-3857WK

FN-3857W DRAWING SUMMARY


FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
 .XXX = ± .010

ANGLE = ± 1°
 HOLES = ± .002

REVISED 5/15/2007

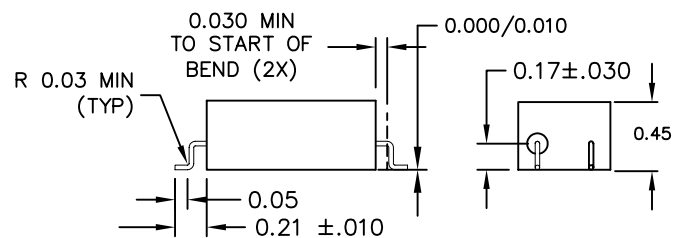

FN-3857WAA

