

SPECIFICATION

COMMERCIALY AVAILABLE

ITEM: CERAMIC BP FILTER
PART NUMBER: CF-06600154
RoHS

Revision Made: Updated Marking due to size constraint.

ISSUED / REVISION	ENGINEER APPROVED	DOCUMENT CHECKED	DRAFTSMAN	DOCUMENT CHECKED
9/25/06				
3/10/10 PM	11/25/2011 TFG	3/15/2010 BF	11/25/2011 GL	

1. APPLICATION

THIS SPECIFICATION APPLIES TO BAND PASS FILTER, USING DIELECTRIC RESONATORS.


2. PART NUMBER

PART NO	CF-06600154
PACKAGING	PLASTIC TRAY


3. SPECIFICATIONS

NO	Parameter	Specification	
1	Center Frequency (Fo)	660 MHz	
2	Pass Bandwidth (BW)	15 MHz (652.5 – 667.5 MHz)	
3	Insertion Loss in BW	3.5 dB max.	
4	Ripple in BW	1.5 dB max.	
5	Return Loss in BW	12.0 dB min.	
6	Attenuation	At 625 MHz	40 dBc min.
		At 695 MHz	40 dBc min.
7	Impedance	50 Ohms	
8	Input Power	5 W max.	
9	Operating Temperature Range	-20°C to +70°C	

S21 LOG MAG NETWORK ANALYZER

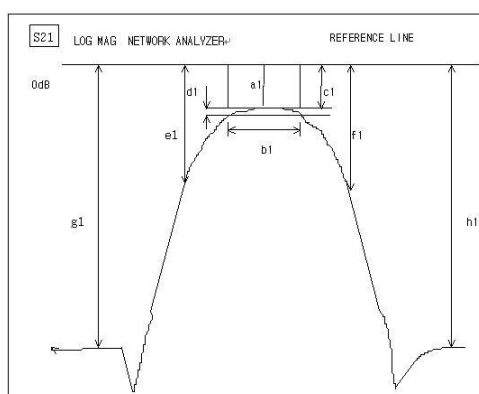


S11 LOG MAG NETWORK ANALYZER

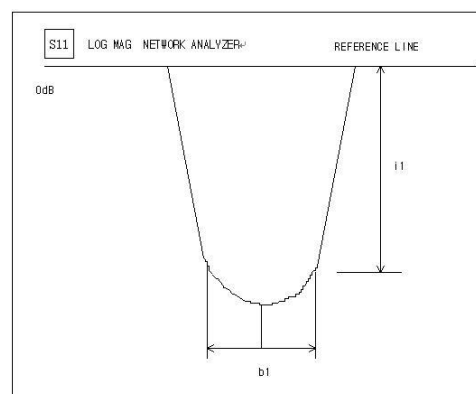


4. GRAPHS:


S21&S11 (INSERTION LOSS, RIPPLE, RETURN LOSS)

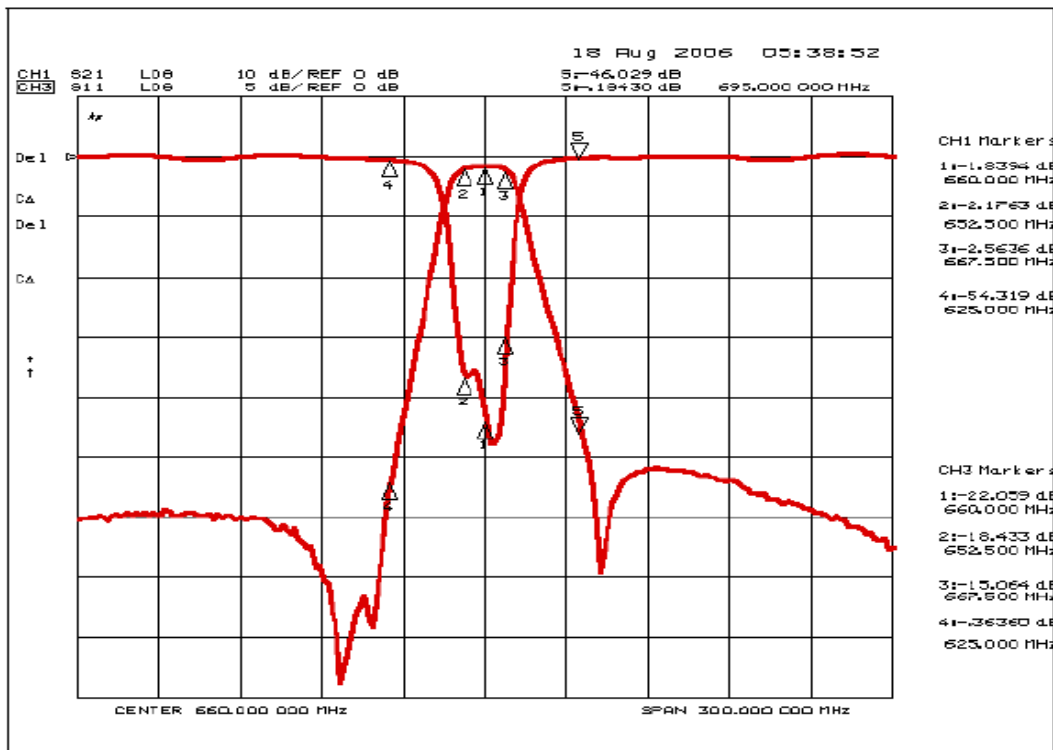

S21&S11 (ATTENUATION AT 625, 695 MHz)

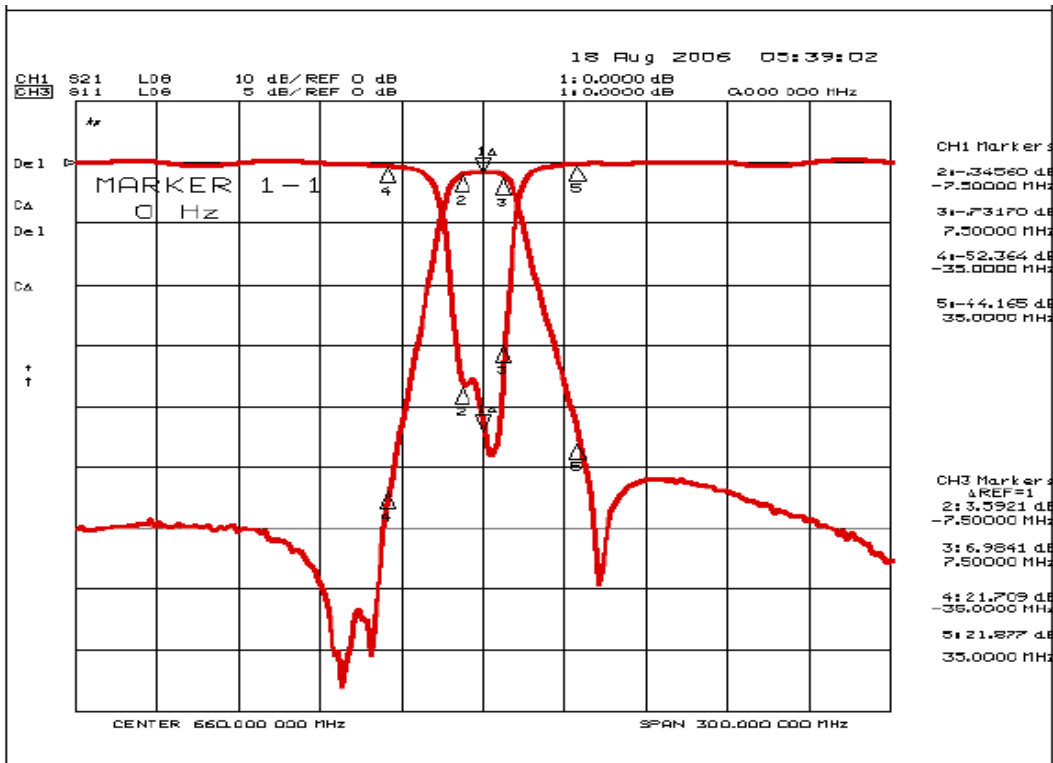

5. DIMENSIONS:

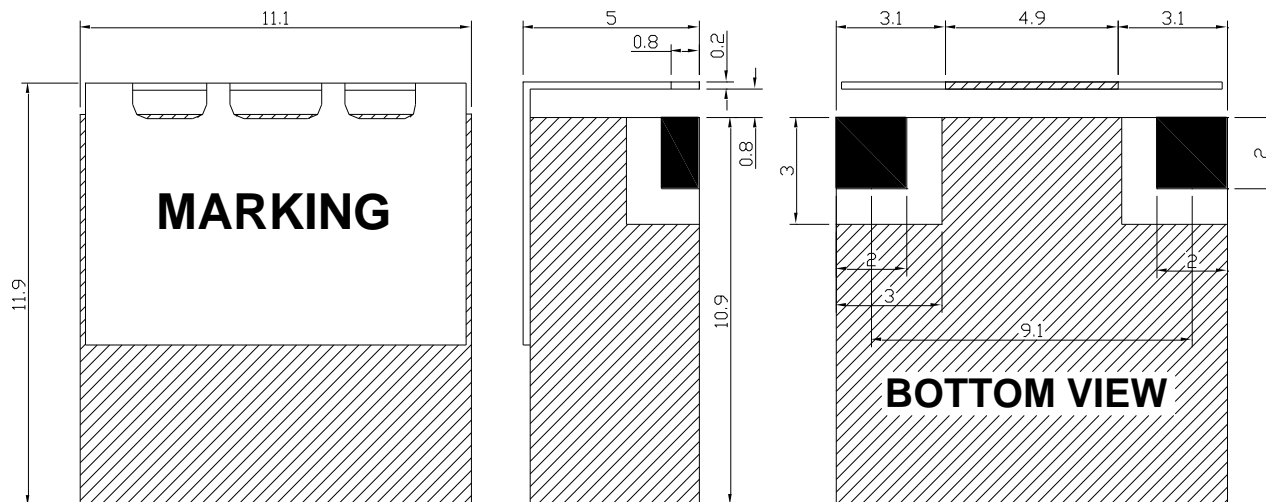

MATERIAL SPECIFICATION

1. METAL CASE
 - 1) MATERIAL: Sn OR Ni PLATED
2. RESONATOR
 - 1) COATING MATERIAL: Ag
3. ROHS Compliant

MARKING: Laser
CF-06600154

UNIT: MM
TOLERANCE: +/-0.5MM
IN/OUT LAND: +/-0.3MM

- CAUTIONS:

1. When handling products, be careful not to damage the outer-electrode.
2. When handling these products be careful not to touch the outer-electrode with bare hands or solderability is reduced.
3. Do not apply excessive pressure or shock to product in handling or in transportation or damage to the ceramic filters may result.


6. DEFINITIONS

TERMS	DESCRIPTION	SPECIFICATION
Center Frequency	The midpoint of through band pass filter pass band, normally expressed as the arithmetic mean of the -3dB point. Also called Fo.	3. SPECIFICATION
Pass Band Width	The width of the pass band of a filter referenced to the minimum insertion loss point in the pass band. The pass band of a filter is stated as -1.0dB bandwidth.	
Insertion Loss	The loss of the filter, in dB, measured at center frequency relative to a through line (0 dB).	
Attenuation	Reduction of RF power through a filter measured in dB, at desired band and referenced to 0 dB. (Filter to be removed from circuit)	
Pass Band Ripple	Variations in loss in the pass band of the filter, superimposed upon the fundamental shape of the pass band.	
V.S.W.R in Pass Band	The ratio of the maximum value of a standing wave to its minimum value, related to the return loss in pass band.	

7. RELIABILITY TEST AND CONDITIONS:

ITEM	TEST CONDITIONS	REQUIREMENTS
Resistance to solder heat	Preheat temperature : 120 to 150°C Preheat time: 1 to 1.5 min Solder temperature: 260 +/- 10°C Dipping time: 10 +/- 0.5 sec	No damage such as cracks should be caused in chip element.
Solderability	Preheat temperature: 120 to 150°C Preheat time: 1 to 1.5 min Solder temperature: 235 +/- 5°C Dipping time: 5 +/- 1 sec	More than 80% of the terminal electrode shall be covered with new solder
Heat resistance (High-temperature Load)	Temperature: 85 +/- 2°C Applied voltage: Rated voltage Applied current: Rated current Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Thermal shock (Temperature cycle)	Conditions for 1 cycle Step 1: + 85°C 15 min Step 2 : - 30°C 15 min Number of cycle: 10	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Humidity Resistance	Temperature: 40 +/- 2°C Humidity: 90 to 95% RH Duration: 96 +/- 5 hrs Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Vibration	Frequency: 10 ~ 50 Hz Amplitude: 1.52 mm (0.060 inches) Direction: X, Y and Z Time: each 30 min for all directions	No mechanical damage. After test, the device shall satisfy the specification in section 3.

8. REFLOW SOLDERING STANDARD CONDITIONS

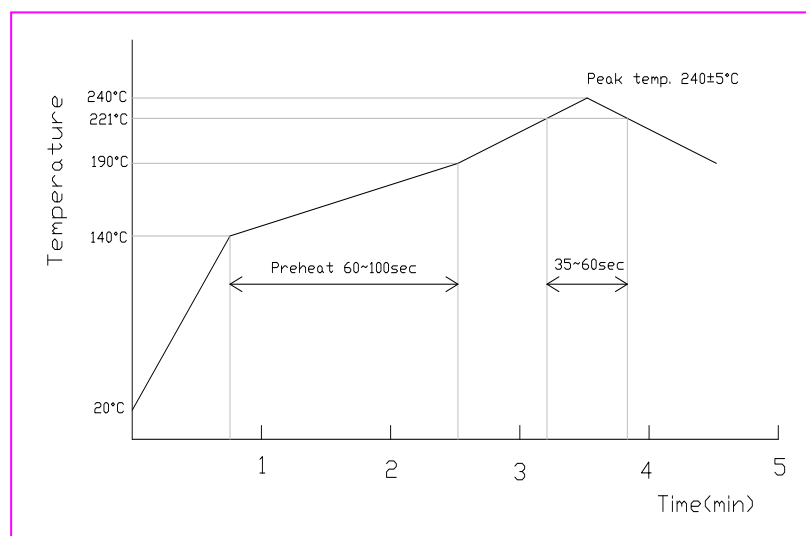

- Measuring point of temperature in-out terminals of the device.
- Reflow Soldering
- Both convection and infrared rays
- Hot air
- Solder Cream: Sn96.5/Ag3.5