



BANDPASS FILTER

Fo: 88.0525 MHz
3dB BANDWIDTH: 25 KHz MIN
60 dB BANDWIDTH: 170 KHz MAX
INSERTION LOSS: 4.0 dB MAX
IMPEDANCE: 50 OHMS (IN & OUT)
RIPPLE: 1.0 dB MAX
SPURIOUS ATTENUATION: 50dBc MIN
INPUT POWER: 13 dBm MAX
OPERATING TEMPERATURE: 0°C to +75°C


FN-3858-1W

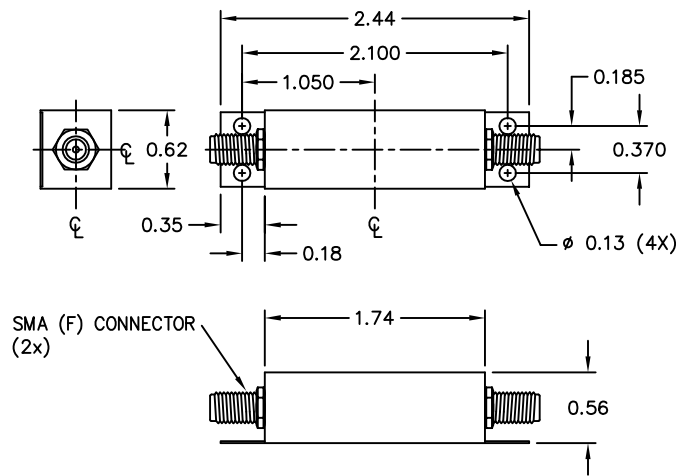


FN-3858-1WT

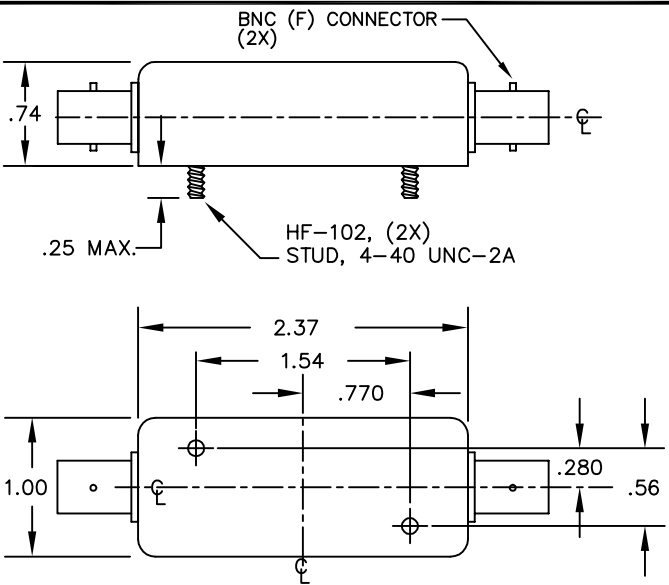


FN-3858-1WK

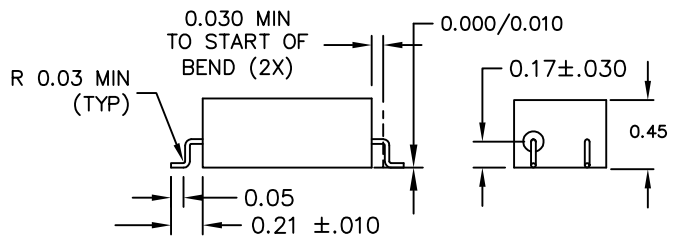

FN-3858-1WAA

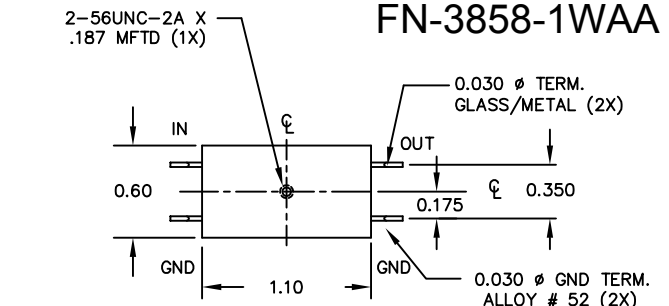

FN-3858-1WS

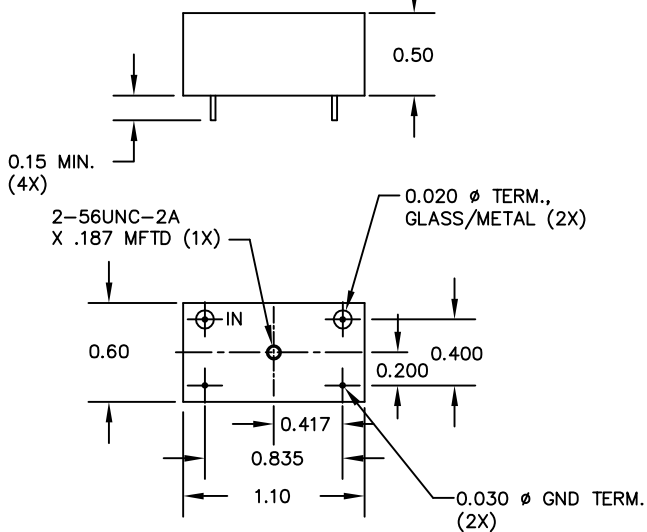

FN-3858W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
.XXX = ± .010

ANGLE = ± 1°
HOLES = ± .002

REVISED 04/10/2015

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY.
DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.