
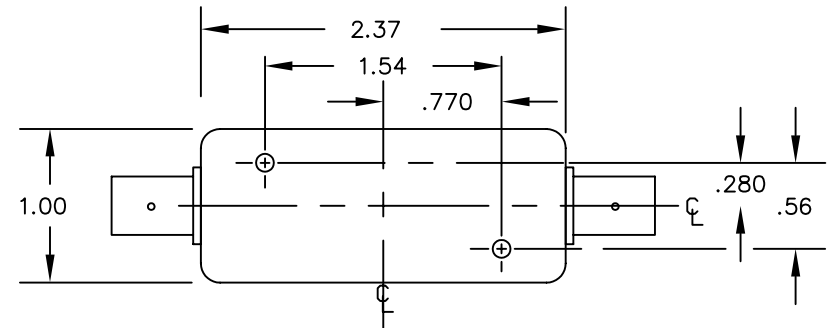
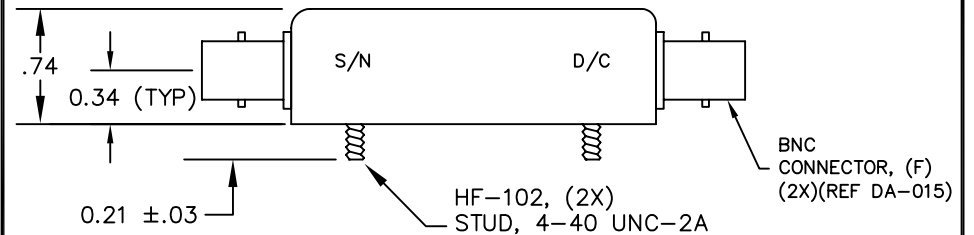


BANDPASS FILTER

Fo: 130 to 170 MHz
 (CUSTOMER TO SPECIFY EXACT FREQUENCY NEEDED AND A DASH NUMBER WILL BE ASSIGNED)
IMPEDANCE : 50 ohm IN/OUT
INSERTION LOSS: 7.50 MAX
RIPPLE : 1.0 dB MAX
3dBc BANDWIDTH: 20 KHz MIN
40dB BANDWIDTH: 90 KHz MAX
ULTIMATE ATTENUATION: 40 dB MIN
INPUT POWER: +0 dBm MAX
OPERATING TEMPERATURE : 0°C to +75°C

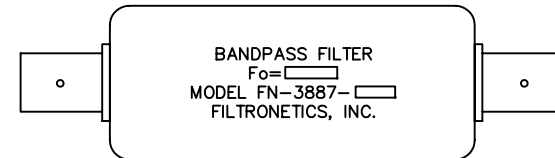

FN-3887W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	

REVISED 8/13/07