


BAND PASS CRYSTAL FILTER


Fo: 48 MHz
 3dBc BANDWIDTH: ± 50 KHz MIN
 INSERTION LOSS: 6.5 dB MAX
 PASS BAND RIPPLE: 1 dB MAX
 IMPEDANCE : 50 ohms
 60dBc BANDWIDTH: ± 500 KHz MAX
 OPERATING TEMPERATURE : -40°C to +63°C
 WORKMANSHIP: J-STD-001
 RoHS COMPLIANT: NO

FN-3982WK

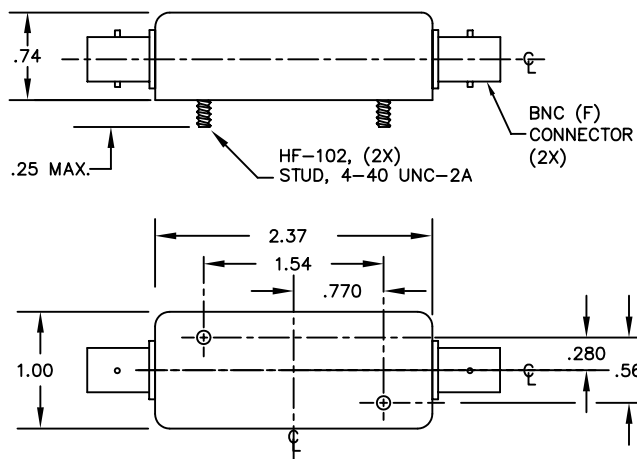


CAN = FA-340
 COVER=FB-239

FN-3982W

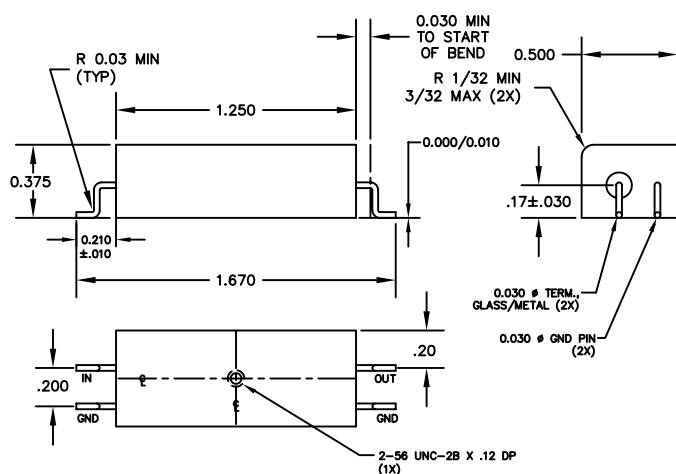

CAN = FA-516
 COVER=FB-658

FN-3982WT

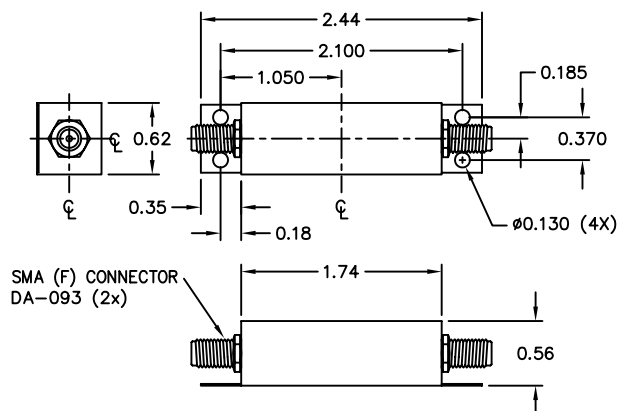

CAN = FA-512
 COVER=FB-500

FN-3982W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = $\pm .020$
 .XXX = $\pm .010$

ANGLE = $\pm 1^\circ$
 HOLES = $\pm .002$

REVISED 01/30/2013

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY.
 DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.