


LC BAND PASS FILTER

CENTER FREQUENCY (Fo): 10.7 MHz
 INSERTION LOSS: 12.0 dB MAX at Fo
 3 dB BAND WIDTH: 750 KHz MIN
 PASSBAND RETURN LOSS @ Fo: 13 dB MIN
 40 dBc BAND WIDTH: 1.5 MHz
 INPUT POWER: 0.5 Watt MAX
 IMPEDANCE : 50 ohms
 OPERATING TEMPERATURE: -10°C TO +50°C
 WORKMANSHIP: IPS-610 CLASS 2
 RoHS COMPLIANT: NO

FN-4034W

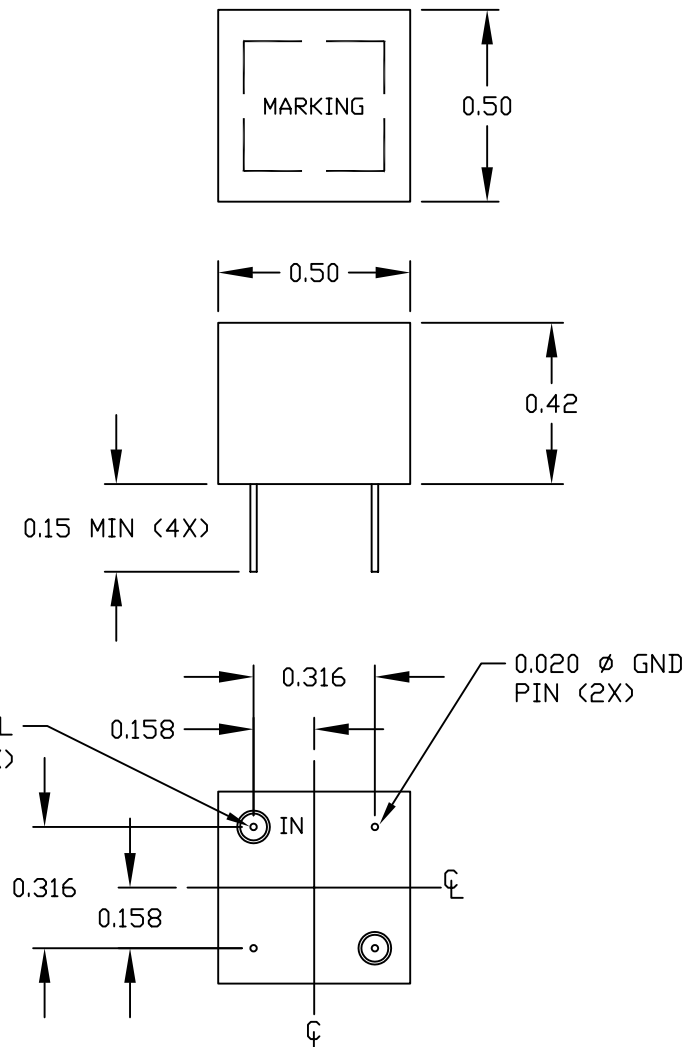

CAN = FA-551

COVER=FB-538

FN-4034W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 04/08/2013

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.