


BANDPASS FILTER


Fo: 140.0 MHz
IMPEDANCE : 50 ohms IN/OUT
INSERTION LOSS: 6 dB MAX
RIPPLE: 0.5 dB MAX
3dB BANDWIDTH: 50 KHz MIN
60dB BANDWIDTH: 250 KHz MAX
OPERATING TEMPERATURE : +15°C to +35°C

FN-4229WK

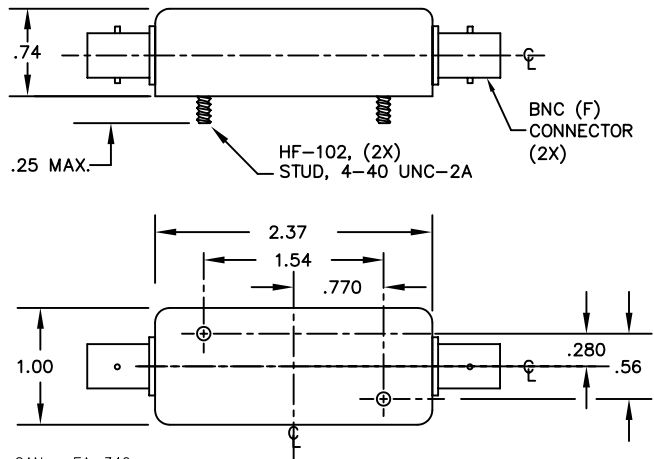


CAN = FA-340
COVER=FB-239

FN-4229WEE

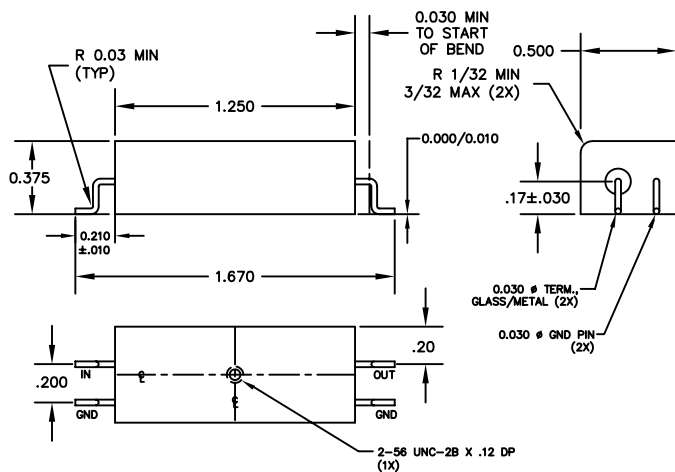


CAN = FA-516
COVER=FB-658

FN-4229WS

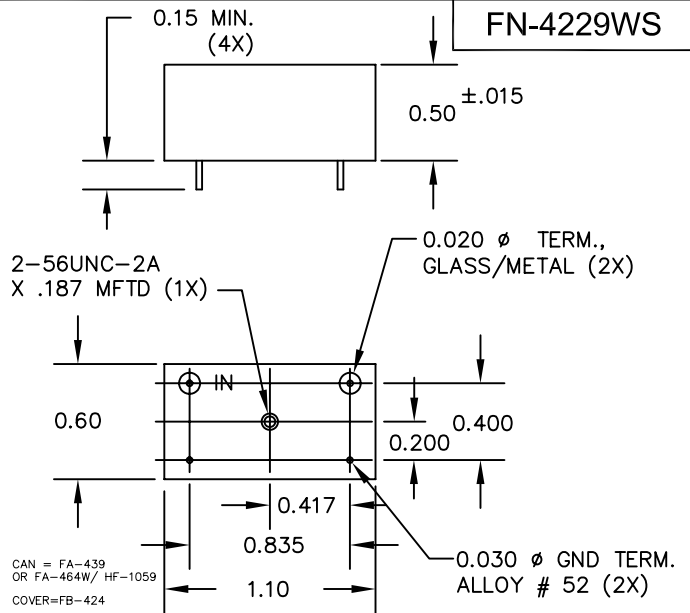

CAN = FA-439
OR FA-464W/ HF-1059
COVER=FB-424

FN-4229WT

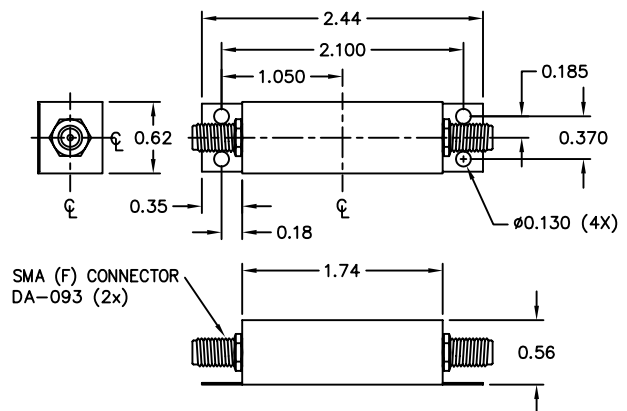

CAN = FA-512
COVER=FB-500

FN-4229W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
.XXX = ± .010

ANGLE = ± 1°
HOLES = ± .002

REVISED 10/12/2012 PER ECO 4423