

CRYSTAL BANDPASS FILTER

Fo: SEE TABLE ON YOUR RIGHT

IMPEDANCE : 50 OHMS (IN & OUT)

INSERTION LOSS: 6 dB MAX

RIPPLE: 0.1 dB MAX

3 dB BANDWIDTH: ± 10 KHz MIN



40 dB BANDWIDTH: 80 KHz MAX

SPURIOUS ATTENUATION: 35 dB MIN

OPERATING TEMPERATURE : 0°C to +50°C

DASH #	CENTER FREQUENCY
	221.25625 MHz
-1	221.93125 MHz
-2	221.28125 MHz
-3	221.94375 MHz
-4	221.26875 MHz
-5	221.78125 MHz

FN-4371W

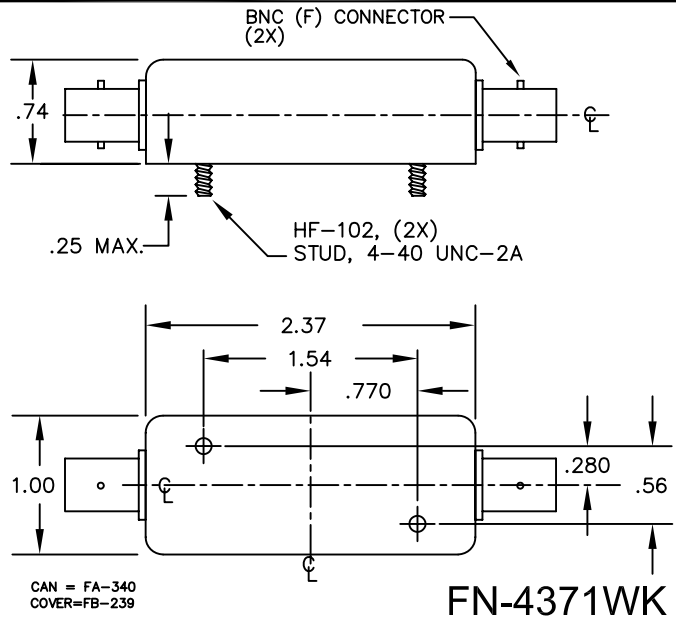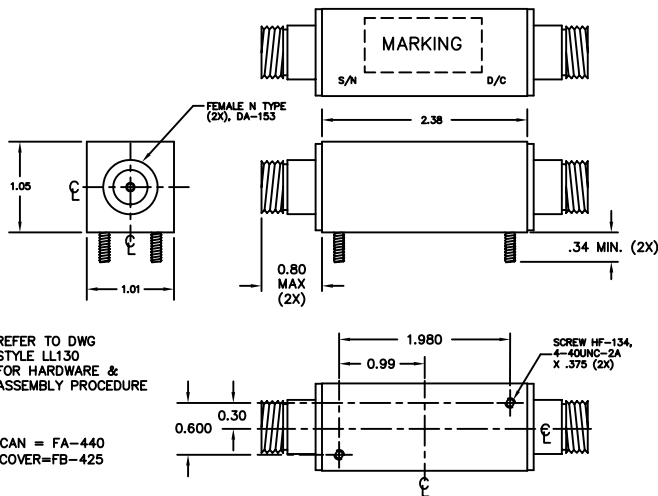

FN-4371W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
 .XXX = ± .010

ANGLE = ± 1°
 HOLES = ± .002

REVISED 06/06/2013