

# SPECIFICATION

**COMMERCIALY AVAILABLE**

**CERAMIC BAND PASS  
PART NUMBER: CF-10300103**

**RoHS**

| ISSUED       | CHECKED | CHECKED       | CHECKED | APPROVED       |
|--------------|---------|---------------|---------|----------------|
| 1/16/2004 ** |         |               |         |                |
| 10/17/11 kn  |         |               |         |                |
| 10/20/11 kn  |         |               |         |                |
| 1/10/12 kn   |         | 05/09/2014 GL |         | 05/09/2014 TFG |
|              |         |               |         |                |

**FILTRONETICS Inc**

1. APPLICATION

THIS SPECIFICATION APPLIES TO BAND PASS FILTER, USING DIELECTRIC RESONATORS.

2. PART NUMBER


|         |              |
|---------|--------------|
| PART NO | CF-10300103  |
| PACKING | PLASTIC TRAY |

3. SPECIFICATIONS


| NO | ITEMS                        | Ref.       | SPECIFICATION |
|----|------------------------------|------------|---------------|
| 1  | Center Frequency (Fo)        | -          | 1030 MHz      |
| 2  | 3dB Band Width               | -          | 10Mhz Min     |
| 3  | Insertion Loss AT Fo         | -          | 3.0 dB Max    |
| 4  | Attenuation [Absolute Value] | At 870MHz  | 70dB Min      |
|    |                              | At 1190MHz | 70dB Min      |
| 5  | Return Loss AT Fo +/-5Mhz    | -          | 12 dB Min     |
| 6  | Impedance                    | -          | 50Ω           |
| 7  | Maximum Input Power          | -          | 1 W (+30dBm)  |
| 8  | *Operating Temperature Range | -          | -35 ~ +75 °C  |

\*CAN OPERATE FROM -45 TO +85°C WITH DEGRADATION


S21 LOG MAG NETWORK ANALYZER

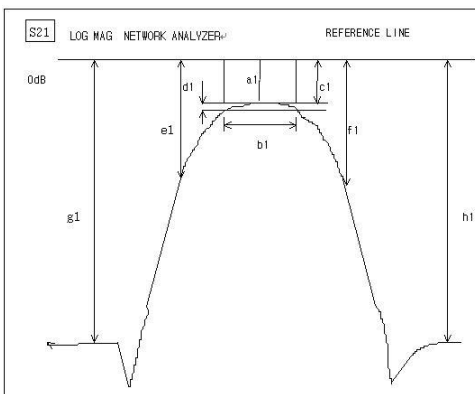

S11 LOG MAG NETWORK ANALYZER

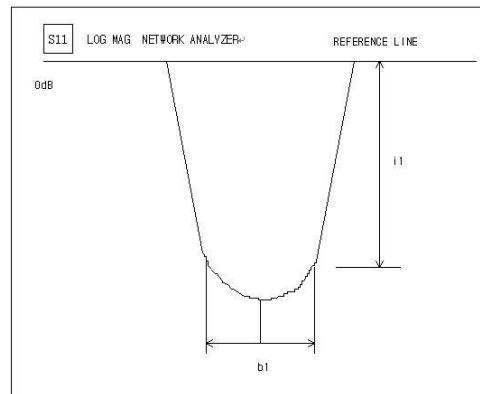

4. DIMENSIONS:

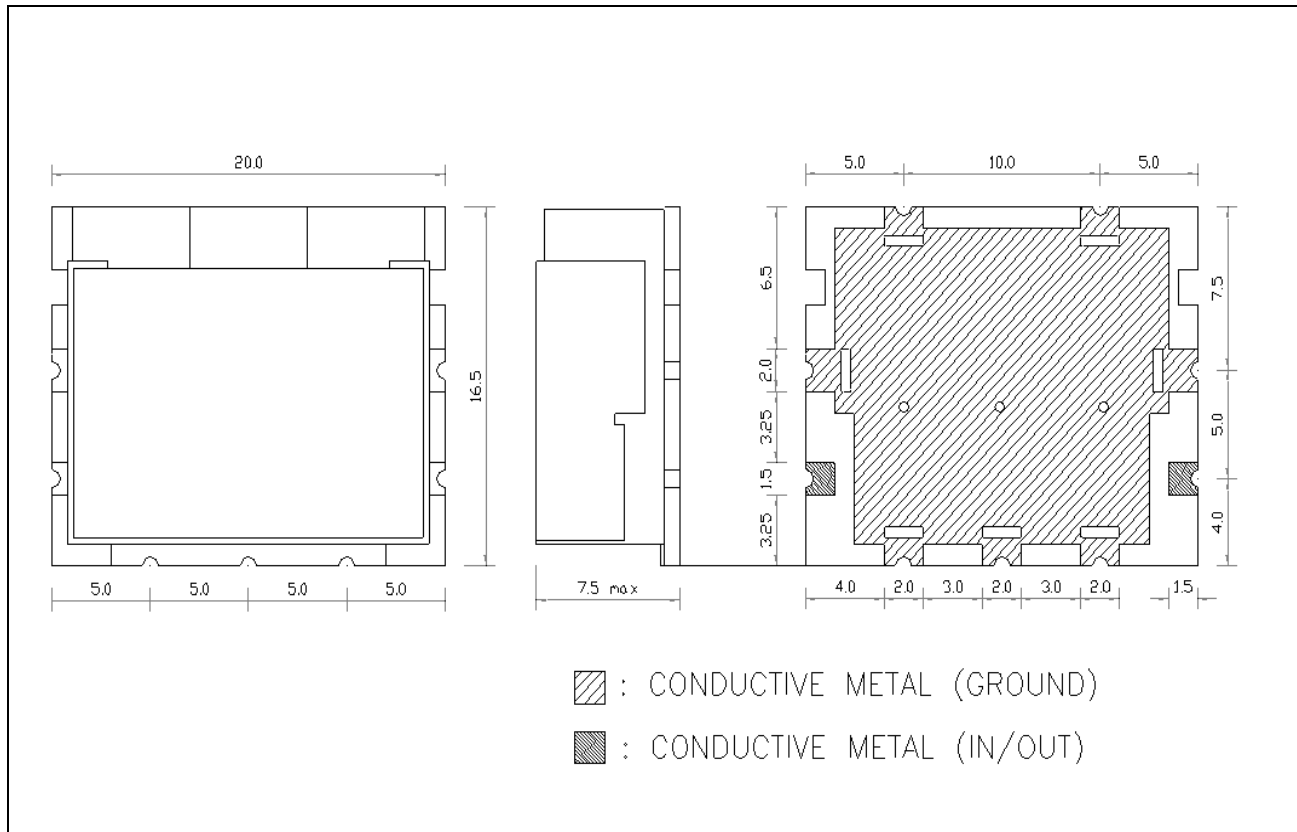

**MATERIAL SPECIFICATION**

1. PCB
  - 1) MATERIAL: FR4
  - 2) TERMINALS: Au PLATED
2. METAL CASE
  - 1) MATERIAL: Sn PLATED
3. RESONATOR
  - 1) COATING MATERIAL: Ag
4. ROHS Compliant

**MARKING**

CF-10300103  
 Filtronetics, Inc  
 Date Code



UNIT: MM  
 TOLERANCE: +/-0.5MM  
 IN/OUT LAND : +/-0.3MM

CAUTIONS:



1. When handling products, be careful not to damage the outer-electrode.
2. When handling products be careful not to touch the outer-electrode with bare hands or solder-ability is reduced.
3. Do not apply excessive pressure or shock to product in handling or in transportation or damage to the ceramic filters may result.

5. GRAPHS:

S21 vs S11 (INSERTION LOSS, RETURN LOSS, ATTENUATION)

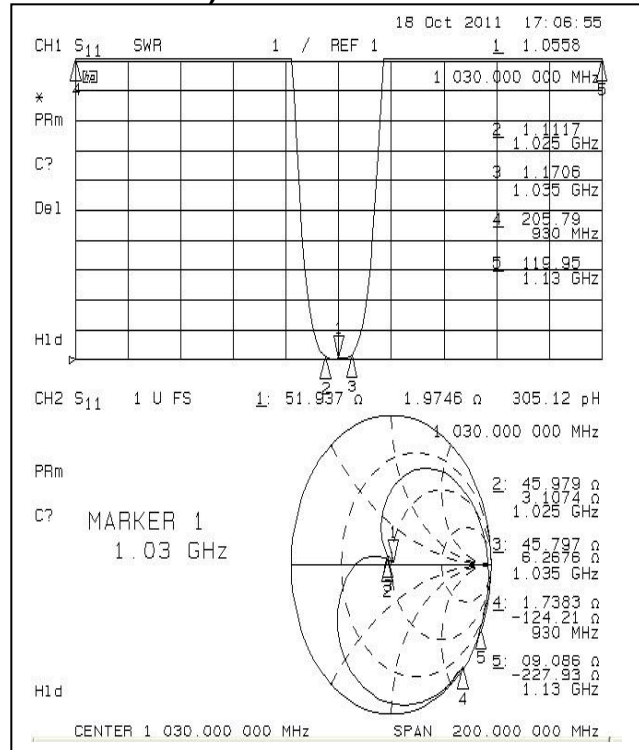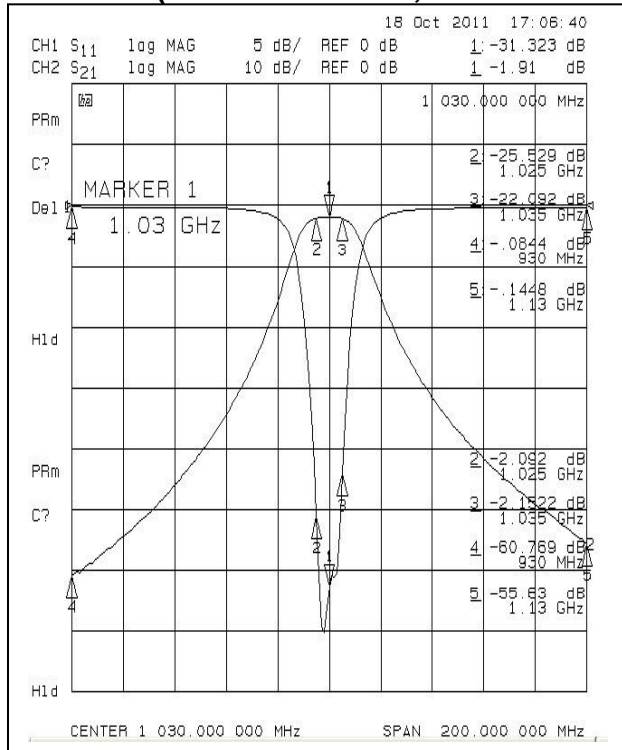

S21 (3.0dB BAND WIDTH, ATTENUATION)

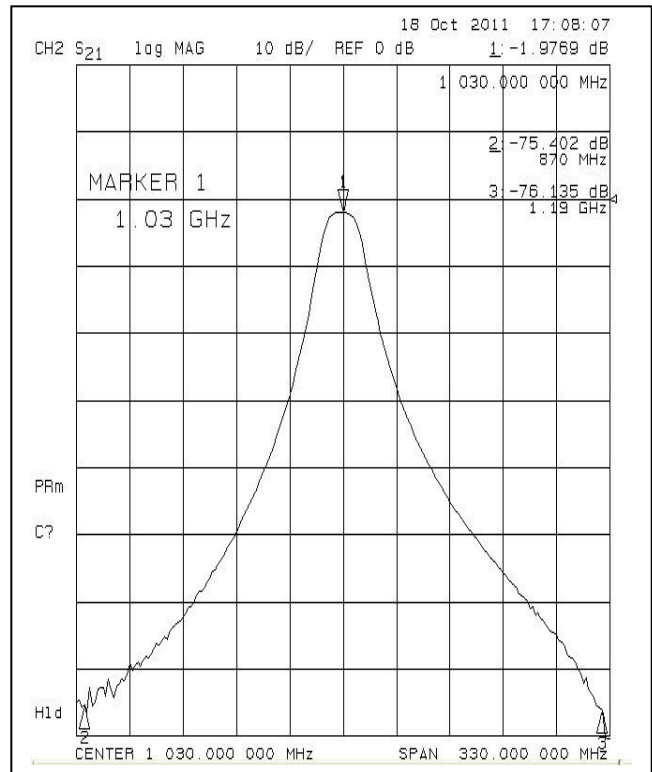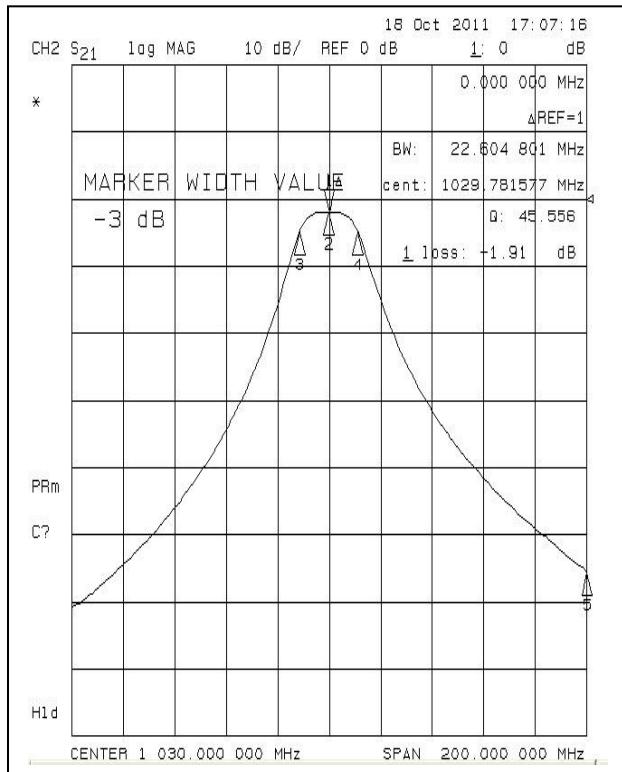


6. SPECIFICATION:

| TERMS                | DESCRIPTION  | SPECIFICATION    |
|----------------------|--|------------------|
| Center Frequency     | The midpoint of through band pass filter pass band, normally expressed as the arithmetic mean of the -3db point. Also called fo.                                 | 3. SPECIFICATION |
| Pass Band Width      | The width of the pass band of a filter referenced to the minimum insertion loss point in the pass band. The pass band of a filter is stated as -1.0dB bandwidth. |                  |
| Insertion Loss       | The loss of the filter, in db, measured at center frequency relative to a through line (0 dB).   |                  |
| Attenuation          | Reduction of RF power through a filter measured in dB, at desired band and referenced to 0 dB. (Filter to be removed from circuit)                               |                  |
| Pass Band Ripple     | Variations in loss in the pass band of the filter, superimposed upon the fundamental shape of the pass band.   |                  |
| V.S.W.R in Pass Band | The ratio of the maximum value of a standing wave to its minimum value, related to the return loss in pass band.   |                  |

7. RELIABILITY TEST AND CONDITIONS:

| ITEM                                    | TEST CONDITIONS  | REQUIREMENTS   |
|---|--|--|
| Resistance to solder heat               | Preheat temperature : 120 to 150°C<br>Preheat time: 1 to 1.5 min<br>Solder temperature: 260 +/- 10°C<br>Dipping time: 10 +/- 0.5 sec   | No damage such as cracks should be caused in chip element.                                 |
| Solderability                           | Preheat temperature: 120 to 150°C<br>Preheat time: 1 to 1.5 min<br>Solder temperature: 235 +/- 5°C<br>Dipping time: 5 +/- 1 sec  | More than 80% of the terminal electrode shall be covered with new solder                   |
| Heat resistance (High-temperature Load) | Temperature: 85 +/- 2°C<br>Applied voltage: Rated voltage<br>Applied current: Rated current<br>Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber. | No mechanical damage. After test, the device shall satisfy the specification in section 3. |
| Thermal shock (Temperature cycle)       | Conditions for 1 cycle<br>Step 1: + 85°C 15 min<br>Step 2 : - 30°C 15 min<br>Number of cycle: 10   | No mechanical damage. After test, the device shall satisfy the specification in section 3. |
| Humidity Resistance                     | Temperature: 40 +/- 2°C<br>Humidity: 90 to 95% RH<br>Duration: 96 +/- 5 hrs<br>Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber.                 | No mechanical damage. After test, the device shall satisfy the specification in section 3. |
| Vibration                               | Frequency: 10 ~ 50 Hz<br>Amplitude: 1.52 mm ( 0.060 inches)<br>Direction: X, Y and Z<br>Time: each 30 min for all directions   | No mechanical damage. After test, the device shall satisfy the specification in section 3. |

8. REFLOW SOLDERING STANDARD CONDITIONS FOR RoHS

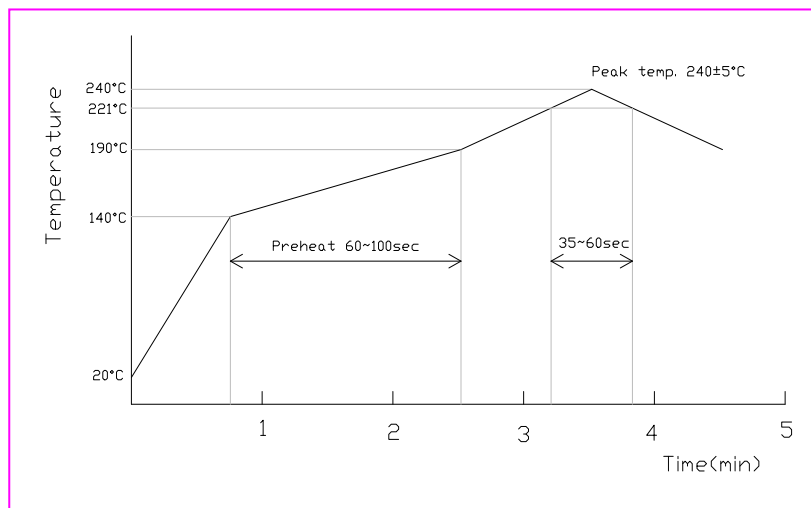

- Measuring point of temperature in-out terminals of the device.
- Reflow Soldering
- Both convection and infrared rays
- Hot air
- Hot plates
- Solder Cream: Sn96.5/Ag3.5