

SPECIFICATION
COMMERCIALY AVAILABLE

DIELECTRIC CERAMIC BP
PART NUMBER: CF-22565505A
NO PURE TIN

1/13/11 added Process Map for NPT

10/18/12 added Tape & Reel

5/10/2018: Changed metal case plating material.

6/25/2019: Changed 3.0dB BW to 550 MHz +15% -0%

9/27/2019: Added "Resonator pin (electrode) shall be solder staked inside resonator" to Material Specification.

8/13/21: Changed resonator pin staking from solder to epoxy.

6/29/23: Added Capacitor to Material Specification section

ISSUED	CHECKED	CHECKED	CHECKED	APPROVED
10/21/05 **				
1/13/11 kn				
10/18/12 kn				
5/10/2018 (CJG)				
6/25/2019 ^(CJG)	6/25/2019 ^(TG)			
9/27/2019 ^(JDE)	9/27/2019 ^(TG)			
8/13/2021 ^(JDE)	8/13/2021 ^(TG)			
6/29/2023 ^(JE)	6/29/2023 ^(TG)			

FILTRONETICS Inc

1. APPLICATION

THIS SPECIFICATION APPLIES TO A BAND PASS FILTER, USING DIELECTRIC RESONATORS.


2. PART NUMBER

PART NO	CF-22565505A
PACKAGING	TAPE & REEL


3. SPECIFICATIONS

NO	ITEMS	Ref.	SPECIFICATION
1	Center Frequency (Fo)	a1	2256 MHz
2	3.0dBc PASS Band (PB)	b1	550 MHz +15% -0%
3	Insertion Loss AT Fo	a1	3.0 dB Max
4	V.S.W.R over 80% of 3 dB BW	-	1.75:1 Min
5	Attenuation	At 1744 MHz	30 dBc Min
		At 2768 MHz	28 dBc Min
6	Group Delay Variation over 80% of 3 dB BW	-	20 nsec Max
7	Impedance	-	50Ω
8	Maximum Input Power	-	1 W (+30dBm)
9	Operating Temperature Range	-	-40 +85°C
10	Workmanship	-	IPC-610 class 3
11	Processing Temp	-	+150°C for 1 hour +230°C for 10 minutes


S21 LOG MAG NETWORK ANALYZER

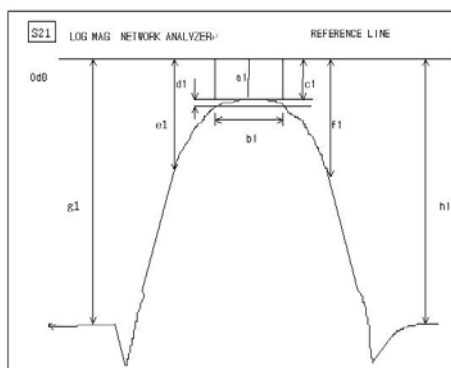

S11 LOG MAG NETWORK ANALYZER

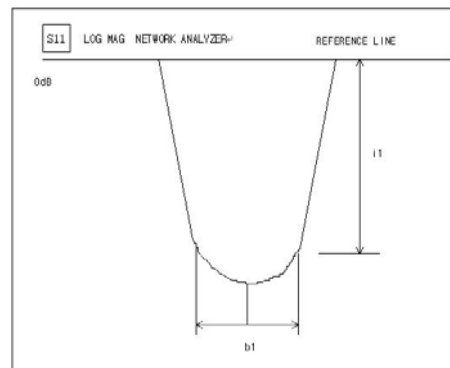

4. DIMENSIONS:

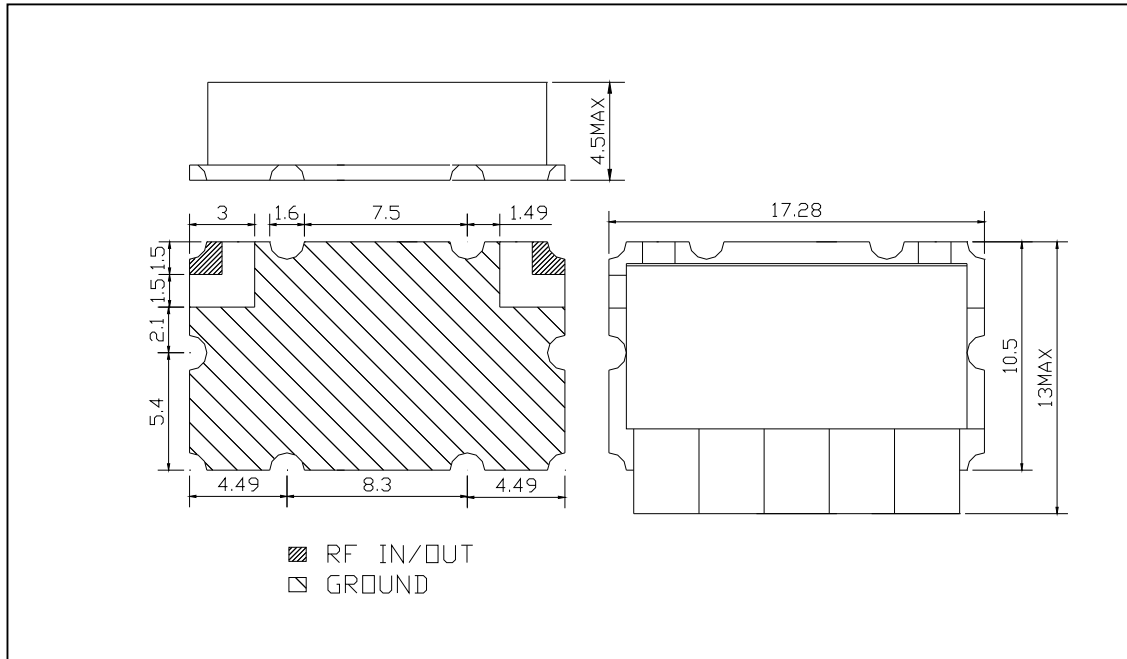

MATERIAL SPECIFICATION

1. PCB
 - 1) MATERIAL: FR4
 - 2) TERMINALS: Sn/Pb, HASL
2. METAL CASE
 - 1) Ag & Sn & Cu, or Ag & Cu plated brass.
3. RESONATOR
 - 1) COATING MATERIAL: silver plate, 8~30um
4. INTERNAL SOLDER
 - 1) Sn96.5/Ag3.5 Lead Free solder, 221° C melting
5. RESONATORS TABS
 - 1) Ag & Sn & Cu, or Ag & Cu plated brass.
 - 2) Resonator pin (electrode) shall be epoxy staked inside resonator.
6. NO PURE TIN ALLOWED
7. CAPACITOR
 - 1) Finish must be NPT compliant with a minimum of 3% alloy other than tin.

MARKING

Label Material: High temp polyimide

Marking:


112551-004
 CF-22565505A
 Filtronetics, Inc
 Date Code

UNIT: MM
 TOLERANCE: +/-0.5MM
 IN/OUT LAND : +/-0.3MM


● CAUTIONS:

1. When handling products, be careful not to damage the outer-electrode.
2. When handling products be careful not to touch the outer-electrode with bare hands or solderability is reduced.
3. Do not apply excessive pressure or shock to product in handling or in transportation or damage to the ceramic filters may result.

Recommended Solder Pattern:

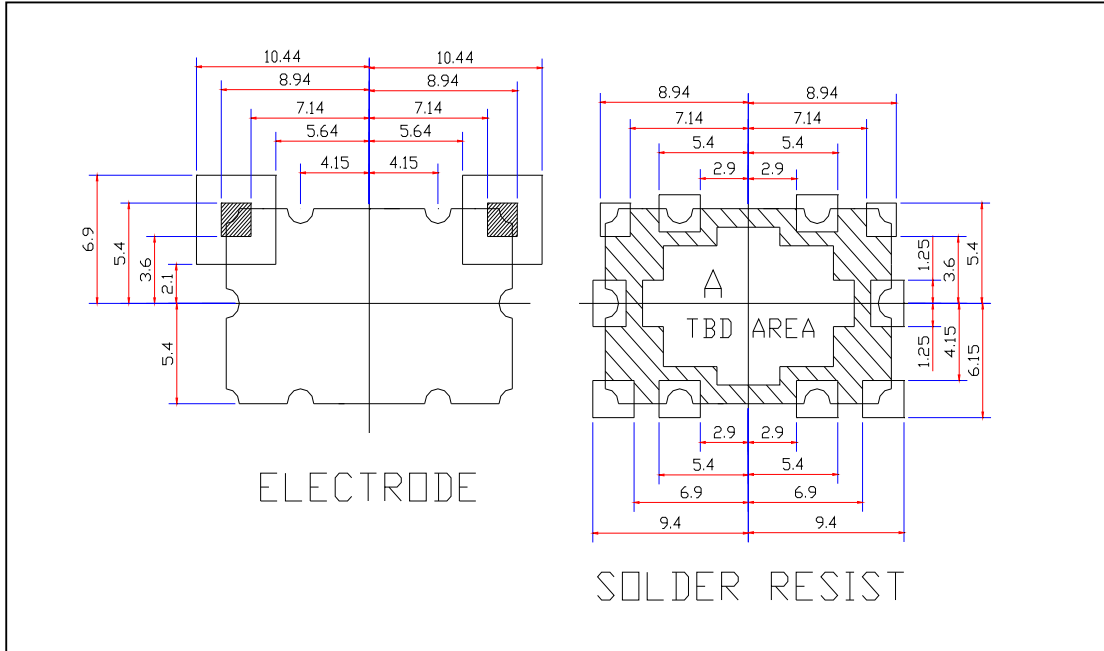


Quality Conformance Test 100% Final inspection	
100% Test Data	
1)	Visual mechanical to IPC-610 Class 3 Including inspection for cleanliness.
2)	Thermal Shock -44 to +85°C 10 cycles
3)	Electrical Specifications at ambient

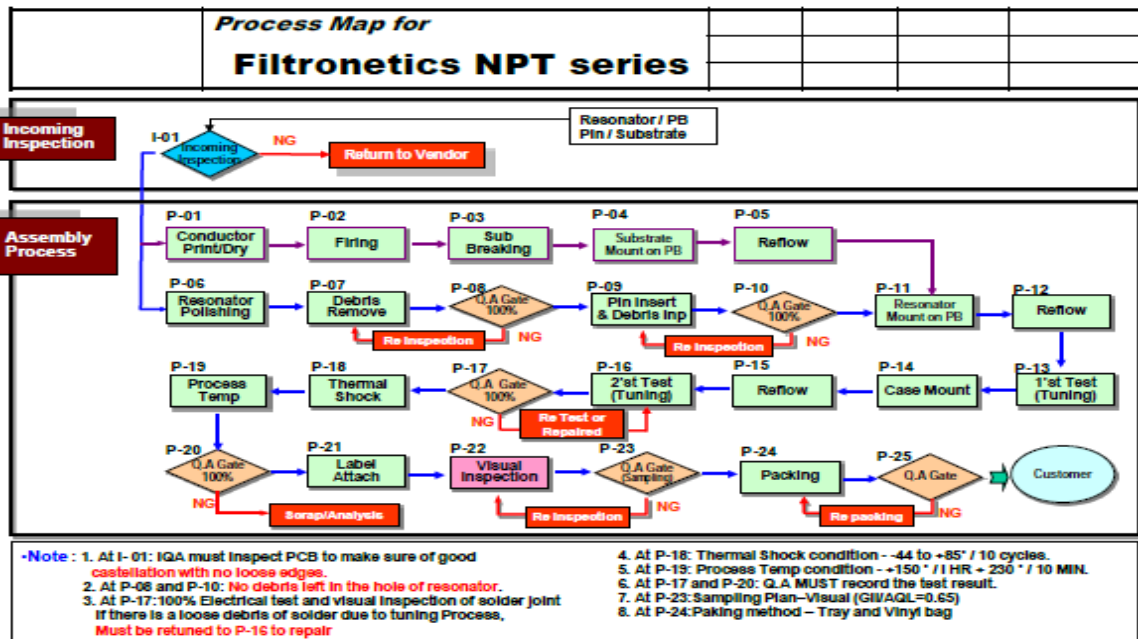

6. DEFINITIONS:

TERMS	DESCRIPTION	SPECIFICATION
Center Frequency	The midpoint of through band pass filter pass band, normally expressed as the arithmetic mean of the -3dB point. Also called fo.	3. SPECIFICATION
Pass Band Width	The width of the pass band of a filter referenced to the minimum insertion loss point in the pass band. The pass band of a filter is stated as -1.0dB bandwidth.	
Insertion Loss	The loss of the filter, in db, measured at center frequency relative to a through line (0 dB).	
Attenuation	Reduction of RF power through a filter measured in dB, at desired band and referenced to 0 dB. (Filter to be removed from circuit)	
Pass Band Ripple	Variations in loss in the pass band of the filter, superimposed upon the fundamental shape of the pass band.	
V.S.W.R in Pass Band	The ratio of the maximum value of a standing wave to its minimum value, related to the return loss in pass band.	
Date Code	Each date code shall be from a single lot	
Lot	One Batch of parts processed in a single manufacturing run. A single lot shall have no more than one firing, plating, soldering, or other batch processing.	
Cleanliness	Parts shall be clean. They shall be free from smudges, loose solder, solder spatter, metal chips or mold release agents. No burrs. Particles or any foreign material over 0.2 mm which might detract from the intended operation, function or appearance of the part.	

7. REFLOW SOLDERING STANDARD CONDITIONS FOR TIN/LEAD

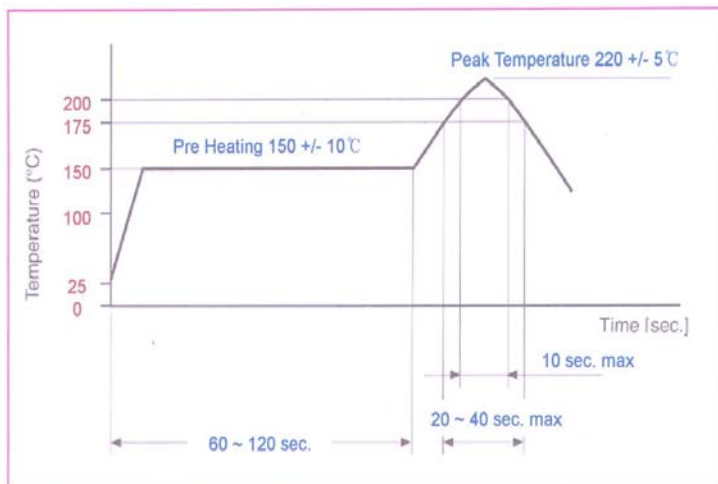

- Measuring point of temperature in-out terminals of the device.
- Reflow Soldering
- Both convection and infrared rays
- Hot air
- Hot plates
- Solder Cream: Sn64/Pb36

8. RELIABILITY TEST AND CONDITIONS:

ITEM	TEST CONDITIONS	REQUIREMENTS	
Resistance to solder heat	Preheat temperature : 120 to 150°C Preheat time: 1 to 1.5 min Solder temperature: 260 +/- 10°C Dipping time: 10 +/- 0.5 sec →Soldering Time : 5sec.max.per each terminal	No damage such as cracks should be caused in chip element.	
Solderability	Preheat temperature: 120 to 150°C Preheat time: 1 to 1.5 min Solder temperature: 235 +/- 5°C Dipping time: 5 +/- 1 sec	More than 80% of the terminal electrode shall be covered with new solder	
Heat resistance (High-temperature Load)	Temperature: 85 +/- 2°C Applied voltage: Rated voltage Applied current: Rated current Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3. Standard condition is 25+/-5°C and Less than 65% relative humidity	
Thermal shock (Temperature cycle)	Conditions for 1 cycle Step 1: + 85°C 15 min Step 2 : - 44°C 15 min Number of cycle: 10	No mechanical damage. After test, the device shall satisfy the specification in section 3.	
Humidity Resistance	Temperature: 40 +/- 2°C Humidity: 90 to 95% RH Duration: 96 +/- 5 hrs Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3.	
Vibration	Direction: X, Y and Z	No mechanical damage. After test, the device shall satisfy the specification in section 3.	
	Frequency (Hz)		PSD
	15		0.02
	30		0.08
	300		0.08
	600		0.20
	700		0.8
	1000		0.8
	1200		0.05
	2000		0.02
	Time: each 30 min for all directions		
Shock	53 G, 11 ms terminal Sawtooth, 3 times in each of the 6 primary axes	No mechanical damage. After test, the device shall satisfy the specification in section 3.	

Vibration: The device is subjected to vibration of 2 sweeps in each of three mutually perpendicular planes
Frequency shall be varied within 10~50Hz with 1.5mm double amplitude and within 50~500 Hz
With 10G's acceleration. Sweep time of Frequency Shall be 15minutes.

Shock: The device is subjected to 3 shocks in each direction of six mutually perpendicular planes
Each shock shall be a half-sine wave shaped with a magnitude of 30G's and a duration of 11msec.