

SPECIFICATION

COMMERCIALY AVAILABLE

ITEM: DIELECTRIC CERAMIC FILTER

PART NUMBER: CF-24301305A

ISSUED / REVISION	ENGINEER APPROVED	DOCUMENT CHECKED	DRAFTSMAN	DOCUMENT CHECKED
10/21/05XX	4/26/2010 SRJ	4/26/2010 BF	6/10/2010 GIL	

FILTRONETICS Inc

1. APPLICATION

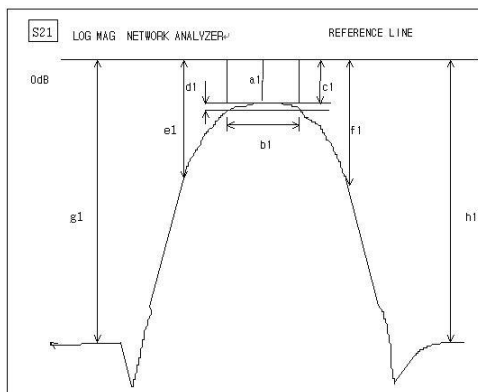
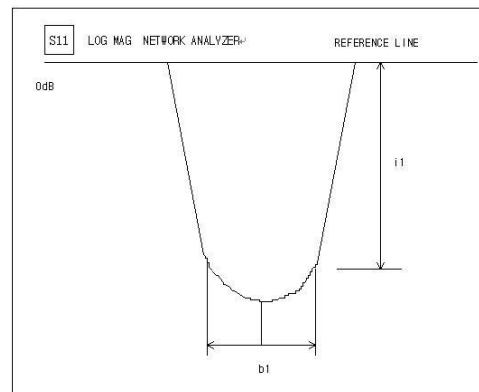
THIS SPECIFICATION APPLIES TO BAND PASS FILTER USING DIELECTRIC RESONATORS.

2. PART NUMBER

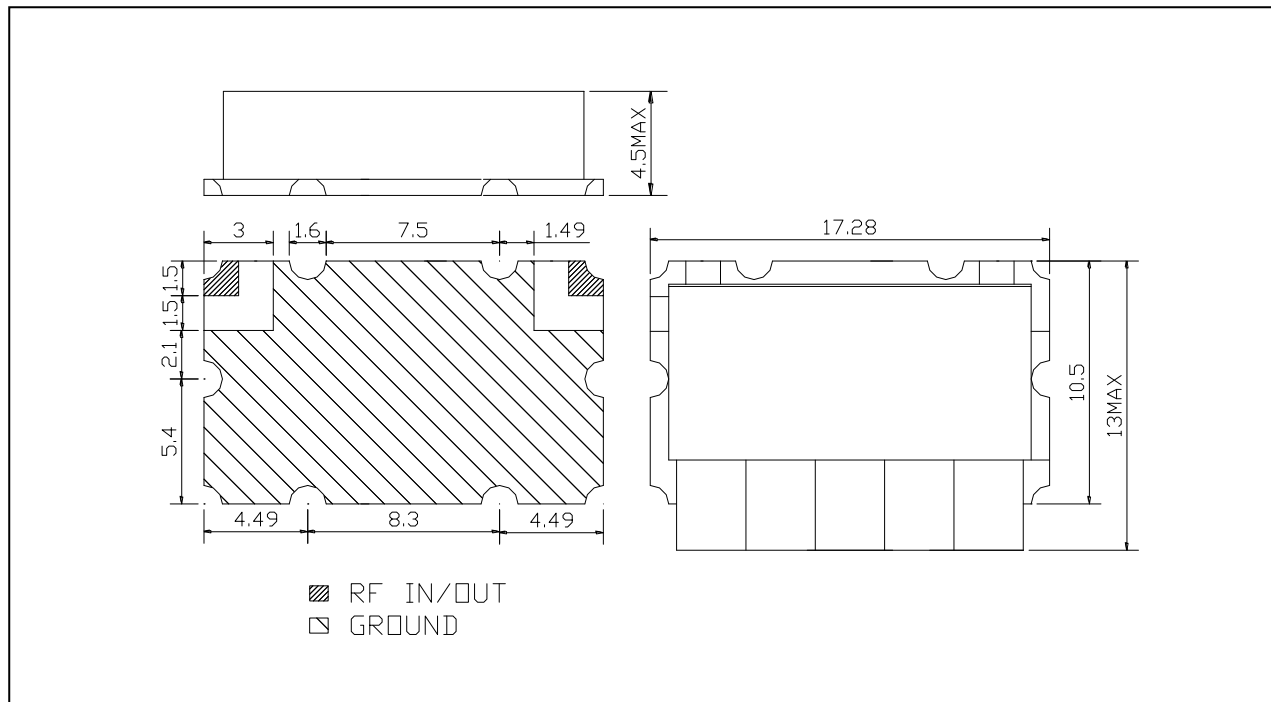
PART NO	CF-24301305A
PACKAGING	PLASTIC TRAY

3. SPECIFICATIONS

NO	ITEMS		Ref.	SPECIFICATION
1	Center Frequency (Fo)		a1	2430 MHz
2	3.0 dBc Pass Band (PB)		b1	130 MHz $\pm$ 10%
3	Insertion Loss	AT Fo	a1	3.0 dB Max
4	V.S.W.R over 80% of 3 dB BW			1.75:1 Min
5	Attenuation	At 2174 MHz	-	30 dBc Min
		At 2685 MHz	-	30 dBc Min
6	Group Delay Variation over 80% of 3 dB BW		-	20 nSec Max
7	Impedance		-	50 Ω
8	Maximum Input Power		-	1 W (+30 dBm)
9	Operating Temperature Range		-	-40 to +85°C
10	Workmanship		-	IPC-610 class 3
11	Processing Temp		-	+150°C for 1 hour +230°C for 10 minutes

S21 LOG MAG NETWORK ANALYZER**S11 LOG MAG NETWORK ANALYZER**

4. DIMENSIONS



※ MATERIAL SPECIFICATION

1. PCB
 - 1) MATERIAL: FR4
 - 2) TERMINALS: Sn/Pb, HASL
2. METAL CASE
3. plated brass (Can not be pure Tin) RESONATOR
 - 1) COATING MATERIAL: silver plate, 8~30um
4. INTERNAL SOLDER
 - 1) Sn96.5/Ag3.5 Lead Free solder, 221 deg C melting
5. RESONATORS TABS
 - 1) plated brass (Can not be pure Tin)
6. NO PURE TIN ALLOWED

※ MARKING

Label Material: High temp polyimide

Marking:

Customer P/N

CF-24301305A

Filtronetics, Inc

Date Code

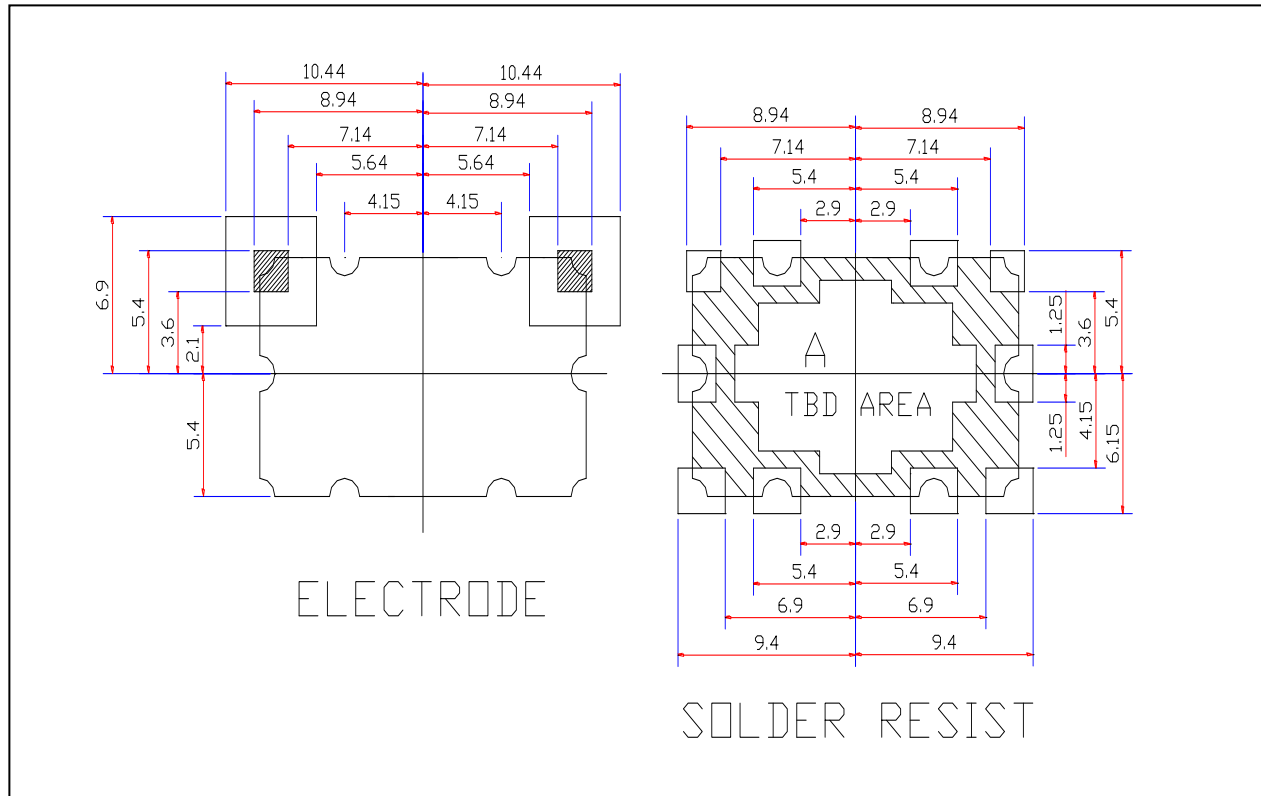
UNIT: MM

TOLERANCE: +/-0.5MM

IN/OUT LAND: +/-0.3MM

● CAUTIONS:

1. When handling products, be careful not to damage the outer-electrode.
2. When handling this product be careful not to touch the outer-electrode with bare hands or solder-ability is reduced.
3. Do not apply excessive pressure or shock to product in handling or in transportation or damage to the ceramic filters may result.

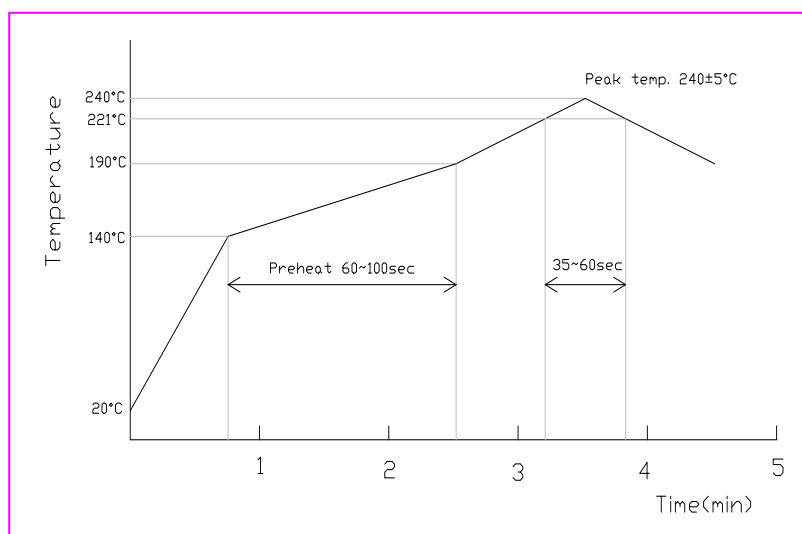
Recommended Solder Pattern:

Quality Conformance Test 100% Final inspection 100% Test Data	
1)	Visual mechanical to IPC-610 Class 3 Including inspection for cleanliness.
2)	Thermal Shock -44 to +85°C 10 cycles
3)	Electrical Specifications at ambient

6. DEFINITIONS

TERMS	DESCRIPTION	SPECIFICATION
Center Frequency	The midpoint of through band pass filter pass band, normally expressed as the arithmetic mean of the -3dB point. Also called Fo.	3. SPECIFICATION
Pass Band Width	The width of the pass band of a filter referenced to the minimum insertion loss point in the pass band. The pass band of a filter is stated as -1.0dB bandwidth.	
Insertion Loss	The loss of the filter, in dB, measured at center frequency relative to a through line (0 dB).	
Attenuation	Reduction of RF power through a filter measured in dB, at desired band and referenced to 0 dB. (Filter to be removed from circuit)	
Pass Band Ripple	Variations in loss in the pass band of the filter, superimposed upon the fundamental shape of the pass band.	
V.S.W.R in Pass Band	The ratio of the maximum value of a standing wave to its minimum value, related to the return loss in pass band.	
Date Code	Each date code shall be from a single lot	
Lot	One Batch of parts processed in a single manufacturing run. A single lot shall have no more than one firing, plating, soldering, or other batch processing.	
Cleanliness	Parts shall be clean. They shall be free from smudges, loose solder, solder spatter, metal chips or mold release agents. No burrs. Particles or any foreign material over 0.2 mm which might detract from the intended operation, function or appearance of the part.	

7. REFLOW SOLDERING STANDARD CONDITIONS



- Measuring point of temperature in-out terminals of the device.
- Reflow Soldering
- Both convection and infrared rays
- Hot air
- Solder Cream: Sn96.5/Ag3.5

8. RELIABILITY TEST AND CONDITIONS

ITEM	TEST CONDITIONS	REQUIREMENTS
Resistance to solder heat	Preheat temperature : 120 to 150°C Preheat time: 1 to 1.5 min Solder temperature: 260 +/- 10°C Dipping time: 10 +/- 0.5 sec →Soldering Time : 5sec.max.per each terminal	No damage such as cracks should be caused in chip element.
Solderability	Preheat temperature: 120 to 150°C Preheat time: 1 to 1.5 min Solder temperature: 235 +/- 5°C Dipping time: 5 +/- 1 sec	More than 80% of the terminal electrode shall be covered with new solder
Heat resistance (High-temperature Load)	Temperature: 85 +/- 2°C Applied voltage: Rated voltage Applied current: Rated current Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3. Standard condition is 25+/-5°C and Less than 65% relative humidity
Thermal shock (Temperature cycle)	Conditions for 1 cycle Step 1: + 85°C 15 min Step 2 : - 44°C 15 min Number of cycle: 10	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Humidity Resistance	Temperature: 40 +/- 2°C Humidity: 90 to 95% RH Duration: 96 +/- 5 hrs Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Vibration	Direction: X, Y and Z	No mechanical damage. After test, the device shall satisfy the specification in section 3.
	Frequency (Hz)	
	15	
	30	
	300	
	600	
	700	
	1000	
	1200	
	2000	
	Time: each 30 min for all directions	
Shock	53 G, 11 ms terminal Sawtooth, 3 times in each of the 6 primary axes	No mechanical damage. After test, the device shall satisfy the specification in section 3.

Vibration: The device is subjected to vibration of 2 sweeps in each of three mutually perpendicular planes

Frequency shall be varied within 10~50Hz with 1.5mm double amplitude and within 50~500 Hz

With 10G's acceleration. Sweep time of Frequency Shall be 15 minutes.

Shock: The device is subjected to 3 shocks in each direction of six mutually perpendicular planes

Each shock shall be a half-sine wave shaped with a magnitude of 30G's and duration of 11msec.