

# SPECIFICATION

**COMMERCIALY AVAILABLE**

**PART NUMBER: CF-25932005**  
**ITEM: DIELECTRIC CERAMIC FILTER**  
**Release Date: June 10, 2004**

**Revised By: kn**  
**Revision Date: 2/17/10**  
**Revision Made: Terminals now Au Plated**

ISSUED	CHECKED	CHECKED	CHECKED	APPROVED

**1. APPLICATION**

THIS SPECIFICATION APPLIES TO BAND PASS FILTER USING DIELECTRIC RESONATORS.


**2. PART NUMBER**

PART NO	CF-25932005
PACKAGING	PLASTIC TRAY


**3. SPECIFICATIONS**

NO	ITEMS	Ref.	SPECIFICATION	
1	Center Frequency (Fo)	a1	2593 MHz	
2	3.0 dB Band Width	b1	200 MHz +/- 10%	
3	Attenuation	At 2337 MHz	g1	40dBc Min
		At 2849 MHz	h1	40dBc Min
4	Insertion Loss At Fo	a1	3.0 dB Max	
5	V.S.W.R At 3dB BW 80%		1.75 : 1	
6	Group Delay At 3dB BW		30ns max	
7	Impedance		50Ω	
8	Maximum Input Power		1 W (+30dBm)	
9	Operating Temperature Range		-20 - +85°C	

**S21 LOG MAG NETWORK ANALYZER**

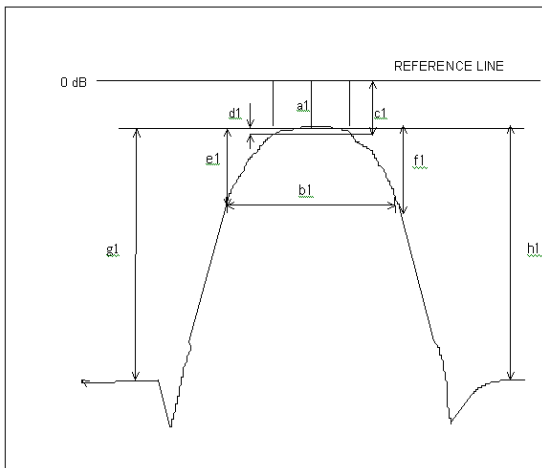


**S11 SWR NETWORK ANALYZER**

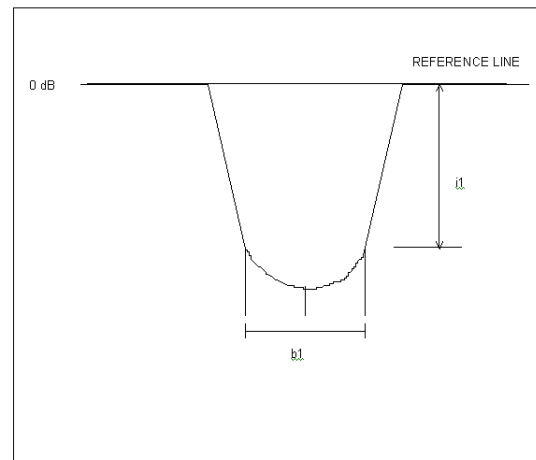

4. DIMENSIONS

UNIT: MM  
 TOLERANCE: +/-0.5MM  
 IN/OUT LAND: +/-0.3MM

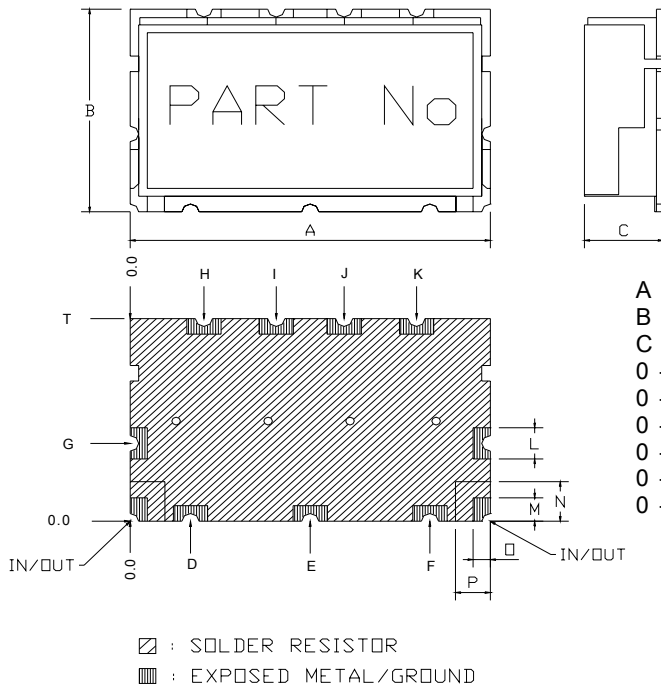

※ MATERIAL SPECIFICATION

1. PCB
  - 1) MATERIAL: FR4
  - 2) TERMINALS: Au PLATED
2. METAL CASE
  - 1) MATERIAL: Sn OR Ni PLATED
3. RESONATOR
  - 1) COATING MATERIAL: Ag
  - 2) DIMENSION: 4.0MM x 4.0MM



※ MARKING

Part Number: CF-25932005  
 Filtronetics, Inc  
 YY/WW



- CAUTIONS:
  1. When handling products, be careful not to damage the outer-electrode.
  2. When handling these products be careful not to touch the outer-electrode with bare hands or solder-ability is reduced.
  3. Do not apply excessive pressure or shock to product in handling or in transportation or damage to the ceramic filters may result.

5. GRAPHS


S21 & S11 (INSERTION LOSS, RETURN LOSS, 3dB BAND WIDTH)

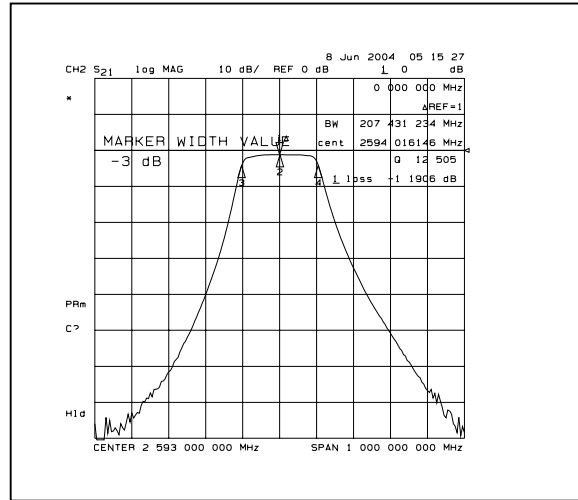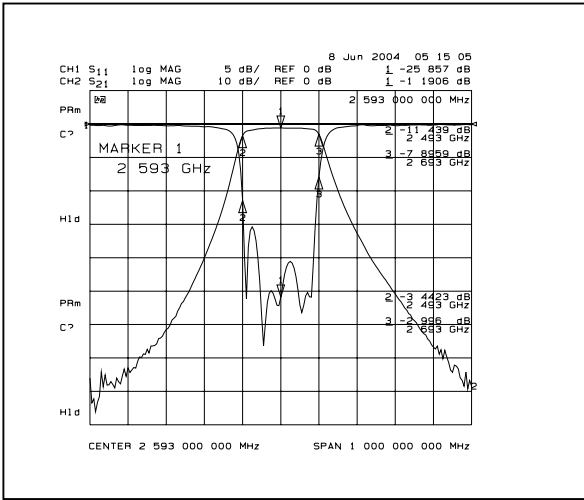

S21 (ATTENUATION, GROUP DELAY)

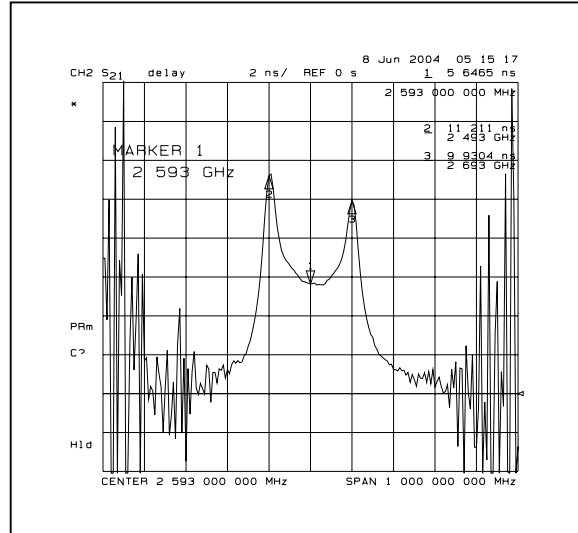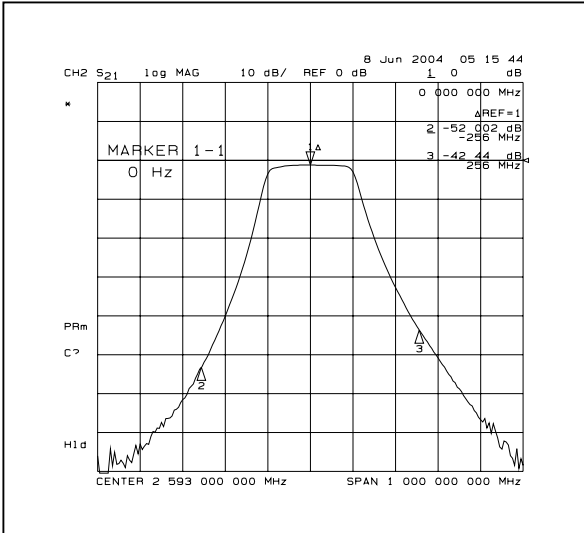

S21 (OUTBAND ATTENUATION)

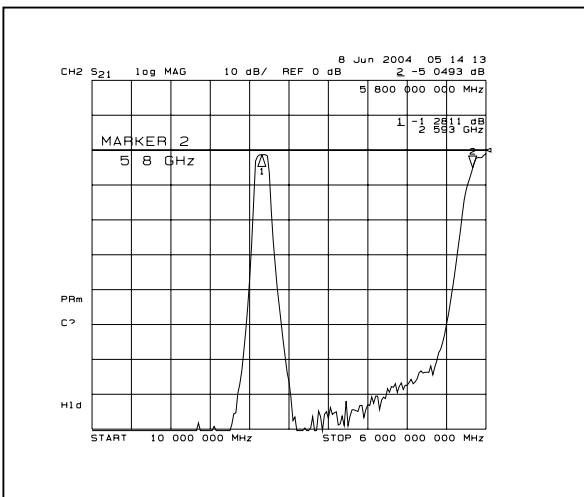


## 6. DEFINITIONS

TERMS	DESCRIPTION	SPECIFICATION
Center Frequency	The midpoint of through band pass filter pass band, normally expressed as the arithmetic mean of the -3dB point. Also called Fo.	3. SPECIFICATION
Pass Band Width	The width of the pass band of a filter referenced to the minimum insertion loss point in the pass band. The pass band of a filter is stated as -1.0dB bandwidth.	
Insertion Loss	The loss of the filter, in dB, measured at center frequency relative to a through line (0 dB).	
Attenuation	Reduction of RF power through a filter measured in dB, at desired band and referenced to 0 dB. (Filter to be removed from circuit)	
Pass Band Ripple	Variations in loss in the pass band of the filter, superimposed upon the fundamental shape of the pass band.	
V.S.W.R in Pass Band	The ratio of the maximum value of a standing wave to its minimum value, related to the return loss in pass band.	

7. RELIABILITY TEST AND CONDITIONS

ITEM	TEST CONDITIONS	REQUIREMENTS
Operating Temp. Range	- 45°C ~ + 85°C	- 40°C ~ + 70°C
Resistance to solder heat	Preheat temperature : 120 to 150°C Preheat time: 1 to 1.5 min Solder temperature: 260 +/- 10°C Dipping time: 10 +/- 0.5 sec	No damage such as cracks should be caused in chip element.
Solderability	Preheat temperature: 120 to 150°C Preheat time: 1 to 1.5 min Solder temperature: 235 +/- 5°C Dipping time: 5 +/- 1 sec	More than 80% of the terminal electrode shall be covered with new solder
Heat resistance (High-temperature Load)	Temperature: 85 +/- 2°C Applied voltage: Rated voltage Applied current: Rated current Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Thermal shock (Temperature cycle)	Conditions for 1 cycle Step 1: + 85°C 15 min Step 2 : - 30°C 15 min Number of cycle: 10	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Humidity Resistance	Temperature: 40 +/- 2°C Humidity: 90 to 95% RH Duration: 96 +/- 5 hrs Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Vibration	Frequency: 10 ~ 50 Hz Amplitude: 1.52 mm ( 0.060 inches) Direction: X, Y and Z Time: each 30 min for all directions	No mechanical damage. After test, the device shall satisfy the specification in section 3.

8. REFLOW SOLDERING STANDARD CONDITIONS

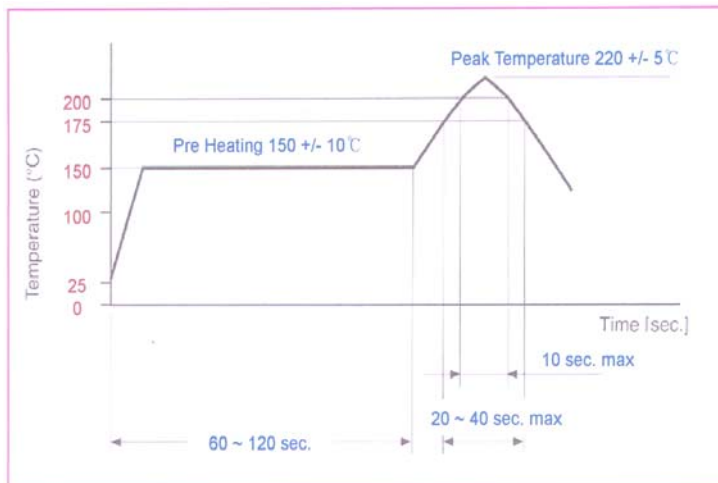

- Measuring point of temperature in-out terminals of the device.
- Reflow Soldering
- Both convection and infrared rays
- Hot air
- Hot plates
- Solder Cream: Sn64/Pb36