

SPECIFICATION
COMMERCIALY AVAILABLE

ITEM: CERAMIC DUPLEXER
 PART NUMBER: CFDM-0836088110
 RoHS

Application: Cellular Duplexer

ISSUED	CHECKED	CHECKED	CHECKED	APPROVED
6/26/2006 bm		09/03/2013 GL		09/03/2013 TFG

FILTRONETICS Inc

1. APPLICATION

THIS SPECIFICATION APPLIES TO A BAND PASS DUPLEX FILTER, USING DIELECTRIC RESONATORS.


2. PART NUMBER

PART NO	CFDM-0836088110
PACKAGING	PLASTIC TRAY


3. SPECIFICATIONS

No	ITEMS		LOW	HIGH
1	Center Frequency (Fo)	a1	836.5 MHz	881.5 MHz
2	Pass Bandwidth (BW)	b1	824 ~ 849 MHz	869 ~ 894 MHz
3	Insertion Loss in BW	c1	2.0 dB Max	2.0 dB Max
4	Ripple in BW	d1	1.2 dB Max	1.2 dB Max
5	Return Loss in BW	i1	15.0 dB Min	15.0 dB Min
6	Attenuation	At 824 ~ 849 MHz	-	60.0 dB Min
		At 869 ~ 894 MHz	60.0 dB Min	-
7	Impedance		50 Ohms	50 Ohms
8	Power Rating		3 W Max	3 W Max
9	Operating Temperature		-35°C to +75°C	-35°C to +75°C


S21 LOG MAG NETWORK ANALYZER

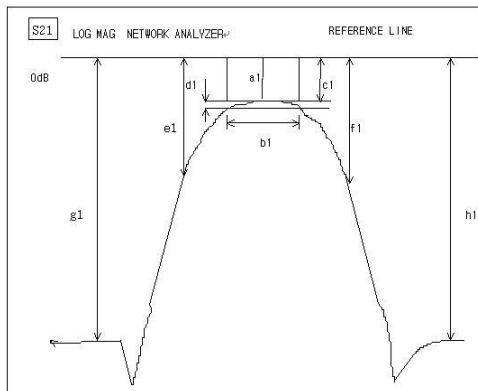

S11 LOG MAG NETWORK ANALYZER

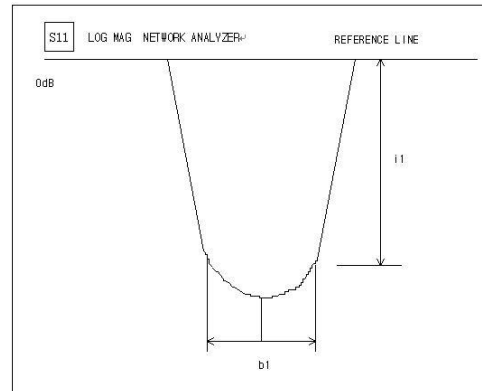

4. DIMENSIONS:

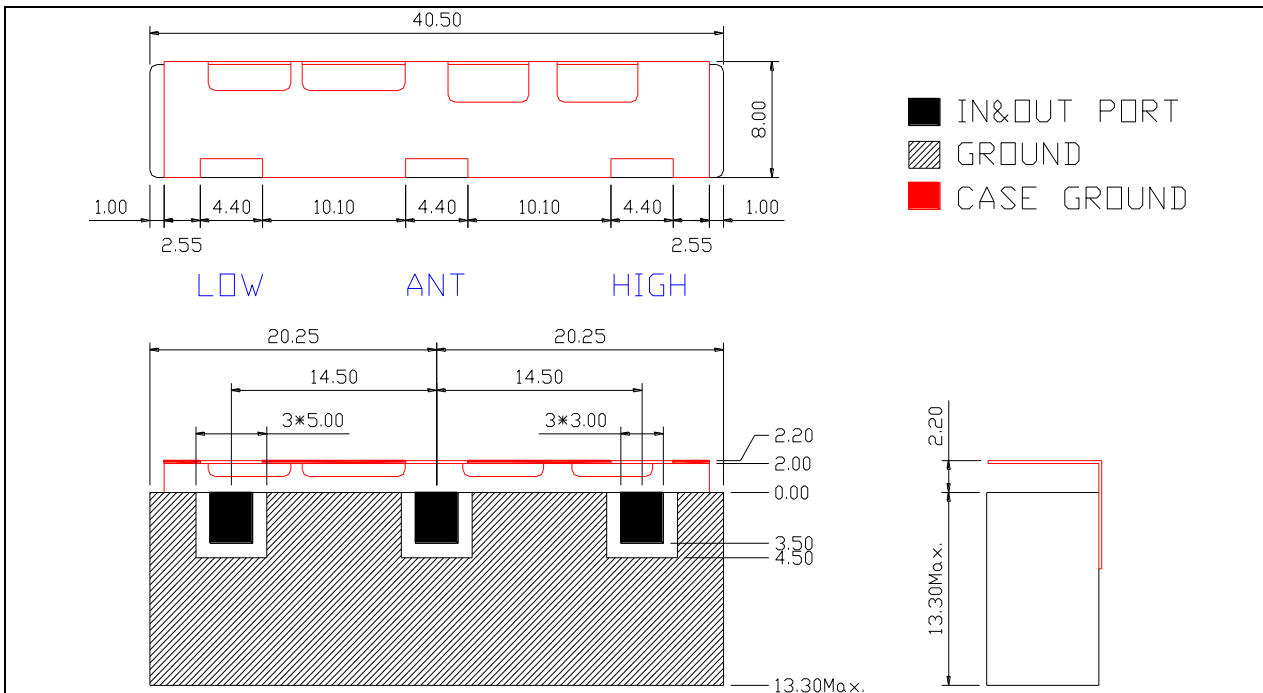

MATERIAL SPECIFICATION

- METAL CASE
 - MATERIAL: Sn OR Ni PLATED
- RESONATOR
 - COATING MATERIAL: Ag
 - DIMENSION: 8MM 10POLE
- ROHS Compliant

MARKING
CFDM-0836088110
 Filtronetics, Inc
 Date Code



UNIT: MM
 TOLERANCE: +/-0.5MM
 IN/OUT LAND : +/-0.3MM

● **CAUTIONS:**


- When handling products, be careful not to damage the outer-electrode.
- When handling products be careful not to touch the outer-electrode with bare hands or solderability is reduced.
- Do not apply excessive pressure or shock to product in handling or in transportation or damage to the ceramic filters may result.

5. GRAPHS:

S21 & S11 (PASS BAND)

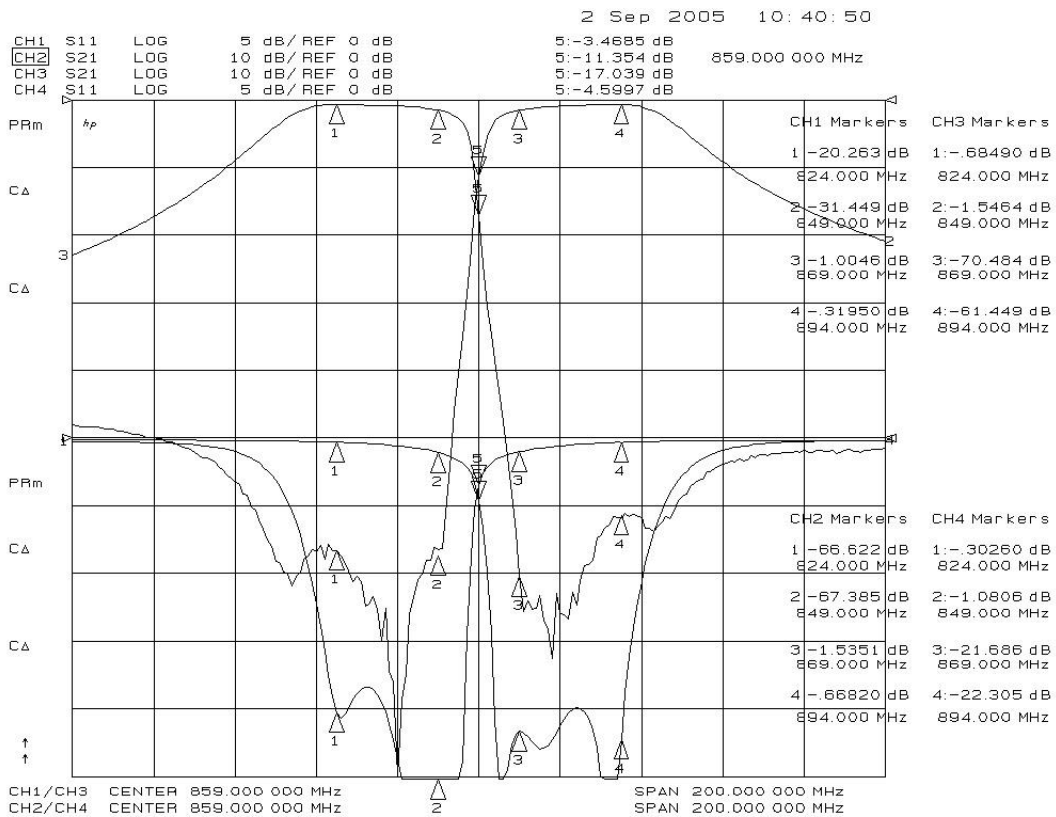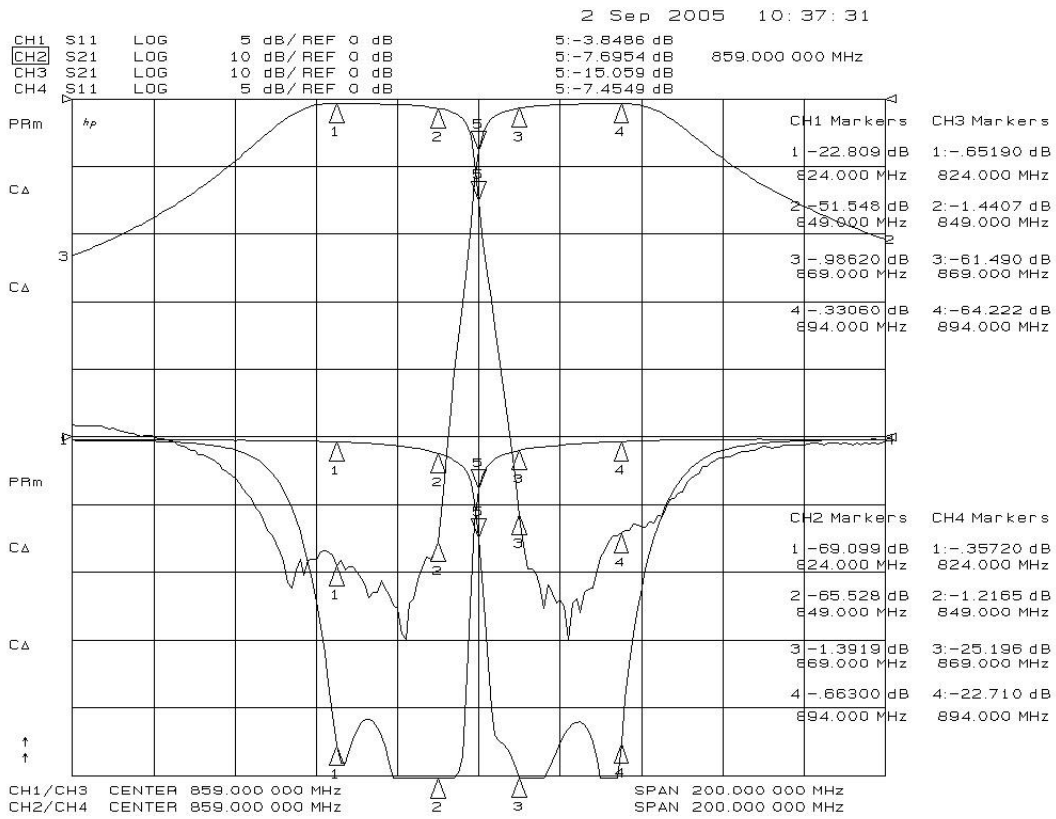

5. DIMENSIONS

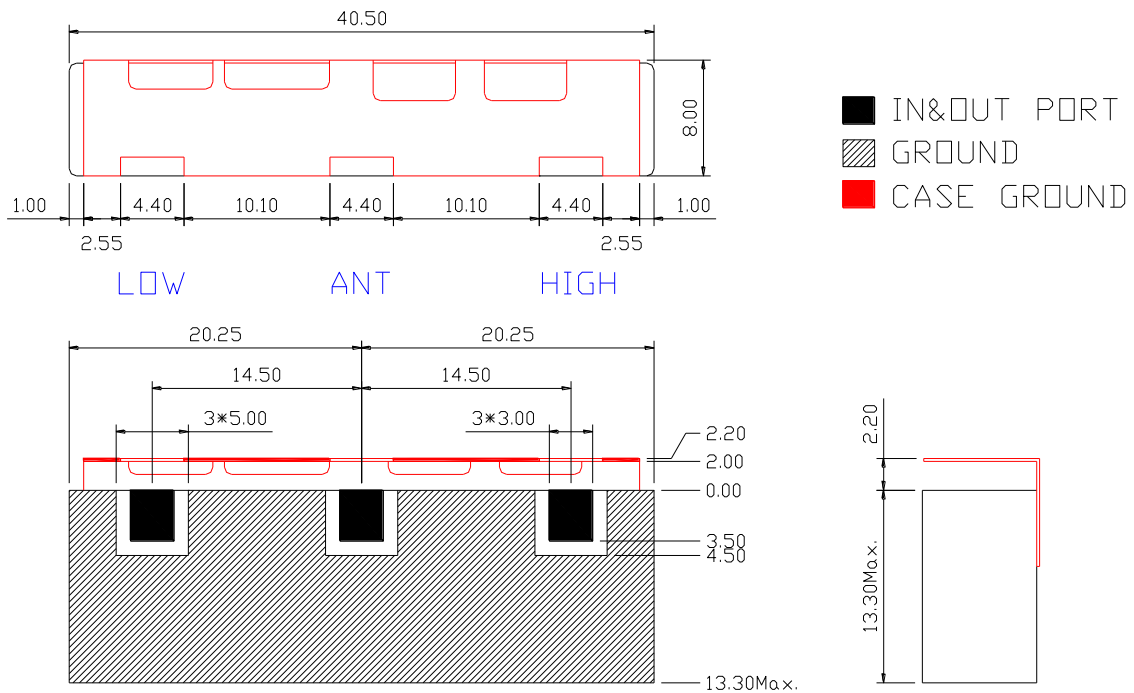

MATERIAL SPECIFICATION

1. METAL CASE
 - 1) MATERIAL: Sn OR Ni PLATED
2. RESONATOR
 - 1) COATING MATERIAL: Ag
 - 2) DIMENSION: 8MM 10POLE
3. ROHS Compliant

MARKING
CFDM-0836088110
 Filtronetics, Inc
 Date Code

UNIT: MM
 TOLERANCE: +/-0.5MM
 IN/OUT LAND :+/-0.3MM

● **CAUTIONS:**

4. When handling products, be careful not to damage the outer-electrode.
5. When handling products be careful not to touch the outer-electrode with bare hands or solderability is reduced.
6. Do not apply excessive pressure or shock to product in handling or in transportation or damage to the ceramic filters may result.


6. DEFINITIONS:

TERMS	DESCRIPTION	SPECIFICATION
Center Frequency	The midpoint of through band pass filter pass band, normally expressed as the arithmetic mean of the -3db point. Also called f_0 .	3. SPECIFICATION
Pass Band Width	The width of the pass band of a filter referenced to the minimum insertion loss point in the pass band. The pass band of a filter is stated as -1.0dB bandwidth.	
Insertion Loss	The loss of the filter, in db, measured at center frequency relative to a through line (0 dB).	
Attenuation	Reduction of RF power through a filter measured in dB, at desired band and referenced to 0 dB. (Filter to be removed from circuit)	
Pass Band Ripple	Variations in loss in the pass band of the filter, superimposed upon the fundamental shape of the pass band.	
V.S.W.R in Pass Band	The ratio of the maximum value of a standing wave to its minimum value, related to the return loss in pass band.	

7. RELIABILITY TEST AND CONDITIONS

ITEM	TEST CONDITIONS	REQUIREMENTS
Resistance to solder heat	Preheat temperature : 120 to 150°C Preheat time: 1 to 1.5 min Solder temperature: 260 +/- 10°C Dipping time: 10 +/- 0.5 sec	No damage such as cracks should be caused in chip element.
Solderability	Preheat temperature: 120 to 150°C Preheat time: 1 to 1.5 min Solder temperature: 235 +/- 5°C Dipping time: 5 +/- 1 sec	More than 80% of the terminal electrode shall be covered with new solder
Heat resistance (High-temperature Load)	Temperature: 85 +/- 2°C Applied voltage: Rated voltage Applied current: Rated current Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Thermal shock (Temperature cycle)	Conditions for 1 cycle Step 1: + 85°C 15 min Step 2 : - 30°C 15 min Number of cycle: 10	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Humidity Resistance	Temperature: 40 +/- 2°C Humidity: 90 to 95% RH Duration: 96 +/- 5 hrs Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Vibration	Frequency: 10 ~ 50 Hz Amplitude: 1.52 mm (0.060 inches) Direction: X, Y and Z Time: each 30 min for all directions	No mechanical damage. After test, the device shall satisfy the specification in section 3.

8. REFLOW SOLDERING STANDARD CONDITIONS

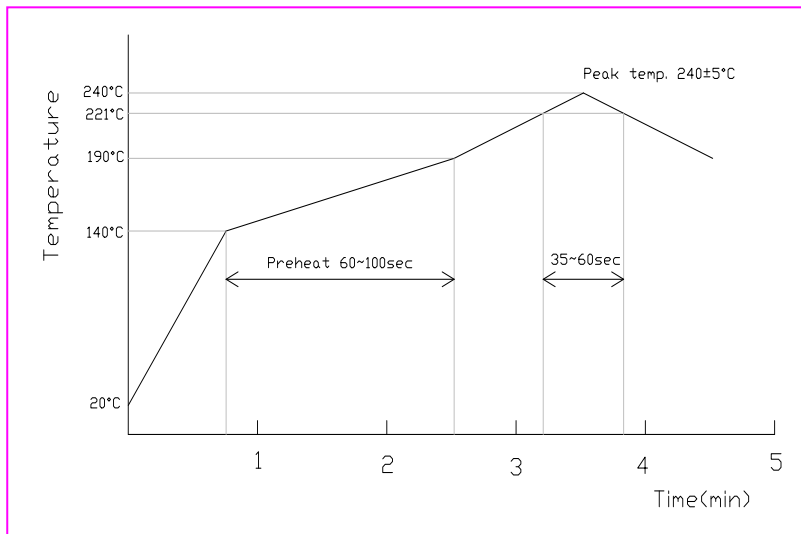

- Measuring point of temperature in-out terminals of the device.
- Reflow Soldering
- Both convection and infrared rays
- Hot air
- Solder Cream: Sn96.5/Ag3.5