


1. PART NUMBER: CFM-33120253

2. SPECIFICATION:

NO	ITEMS	SPECIFICATIONS	
1	Center Frequency (Fo)	3312.5 MHz	
2	Pass Bandwidth (BW)	25 MHz (Fo±12.5 MHz)	
3	Insertion Loss in BW	3.0 dB max.	
4	Ripple in BW	0.5 dB max.	
5	V.S.W.R in BW	1.5	
6	Attenuation (referenced to midband insertion loss)	At 0 - 2500 MHz	35 dBc min.
		At 2816 – 2841 MHz	40 dBc min.
		At 3058 – 3083 MHz	35 dBc min.
		At 3179 – 3204 MHz	30 dBc min.
		At 3400 – 3425 MHz	20 dBc min.
		At 3230 – 3255 MHz	15 dBc min.
		At 4000 MHz	35 dBc min.
7	Impedance	50 Ohms	

3. DIMENSIONS

TOLERANCE : ± 0.3 mm

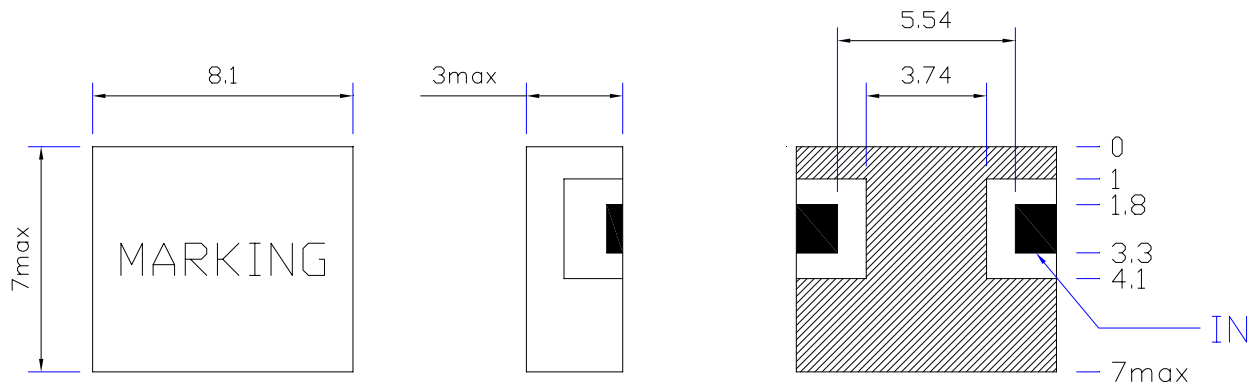

IN&OUT PORT
 GROUND